
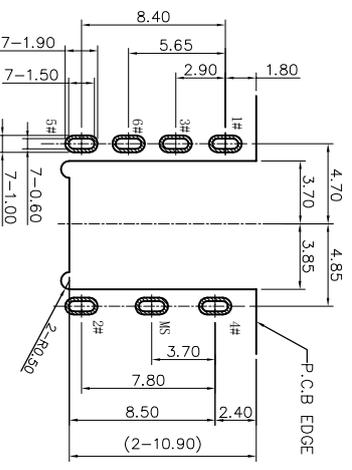


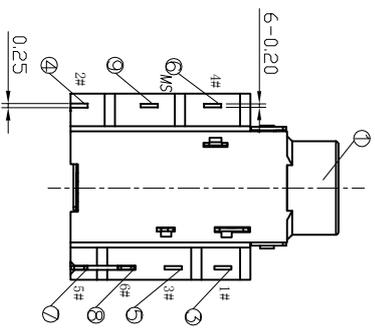
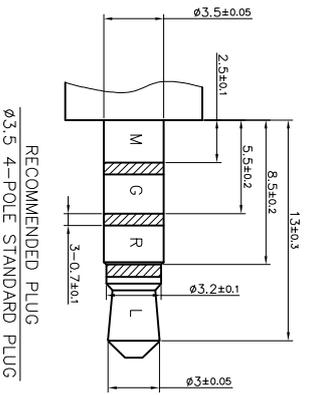
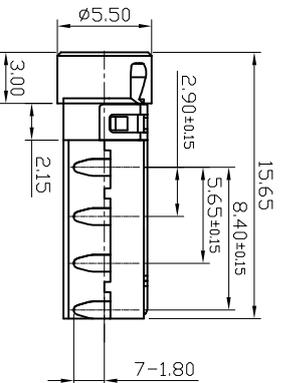
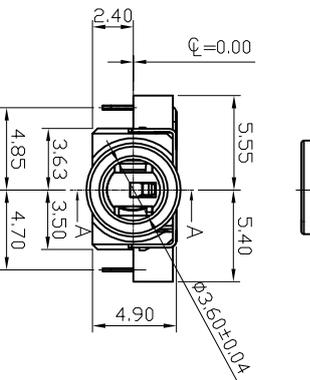
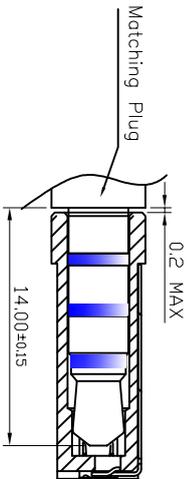


# RoHS 客户图

Specification:

1. Rating : DC 30W 0.5A;
2. Contact resistance:  $\leq 30m\Omega$  ;  
After test:  $\leq 50m\Omega$
3. Insulation resistance:  $\geq 100M\Omega$  (500VDC) ;  
After test:  $\geq 50M\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. Life test: 5000cycles ;
7. Operation temperature range: -20°C~70°C
8. Preservative temperature range: -40°C~85°C



P.C.B HOLES(TOP VIEW) t=1.2mm  
NOTE: GENERAL TOLERANCE: ±0.05mm

序号	描述	数量	材料	备注
①	Housing	1	HI-TEMP.THERMOPLASTIC	black
②	Separator	1	HI-TEMP.THERMOPLASTIC	black
③	1# terminal	1	Copper Alloy	
④	2# terminal	1	Copper Alloy	
⑤	3# terminal	1	Copper Alloy	
⑥	4# terminal	1	Copper Alloy	
⑦	5# terminal	1	Copper Alloy	
⑧	6# terminal	1	Copper Alloy	
⑨	shell	1	Copper Alloy	NI

此图由Autodesk教育版产品制作 THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

深圳市鑫风雷电电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHECK	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	DRAW NO
X	±0.30	X'	1:1	2009/10/20	王冠	雷永健	8028F-PJ33130-Y100AG0H1	Ø3.5 PHONE JACK		
XX	±0.25	X''			雷永健	雷永健				
XXX	±0.15	XXX'			核准	雷永健				