
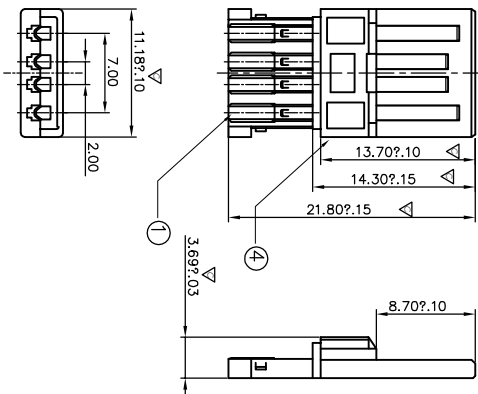
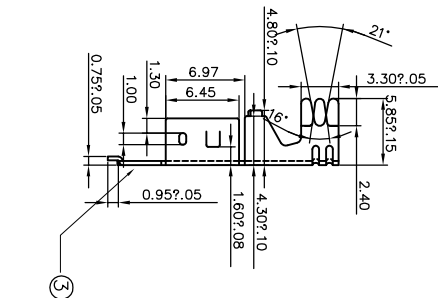
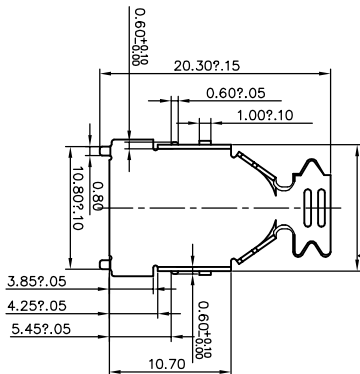


1 2 3 4 5 6 7 8 9 10




Rohs 客户图



NOTES

Electrical:
Contact current Rating: 1 Amperes.
Dielectric Withstanding Voltage: AC 750V at sea level.
Insulation resistance: 1 000Megohms Min.
Contact Resistance: 30Milliohms Max.
Operating Temperature: -55°C to +85°C

MECHANICAL CHARACTERISTICS:
Mating Force: 3.57Kg.Max.
Umating Force: 1.02Kg.Min.

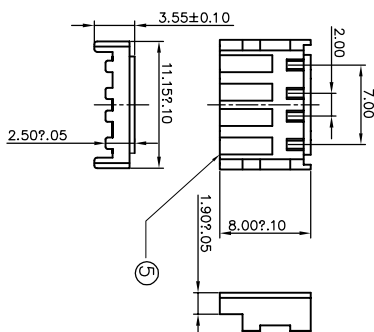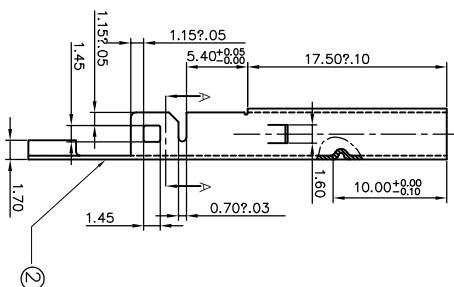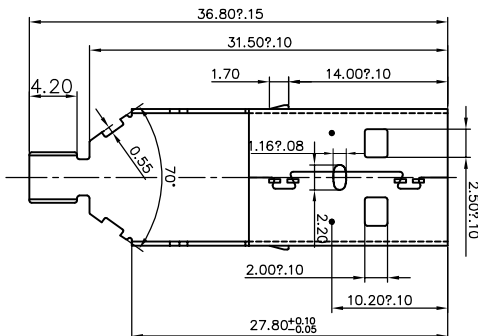

ITEM	DESC.	MATERIAL	REMARKS
1	CONTACT	BRASS (t=0.25)	CONTACT AREA :SEE NOTE SOLDER AREA :5n 100u"MIN UNDER-PLATING :Ni 50u"MIN OVER-PLATING :Au 30u"MIN
2	FRONT SHELL	SPCC-5D (t=0.35)	UNDER-PLATING :Cu 50u"MIN OVER-PLATING :Ni 100u"MIN
3	REAR SHELL	SPCC-5D (t=0.35)	UNDER-PLATING :Cu 50u"MIN OVER-PLATING :Ni 100u"MIN
4	HOUSING	HIGH TEMPERATURE THERMOPLASTICS	30%G.F. UL94V-0; COLOR :SEE NOTE
5	COVER	HIGH TEMPERATURE THERMOPLASTICS	30%G.F. UL94V-0; COLOR :SEE NOTE

产品图

深圳市鑫风雷电子有限公司

公差一览表				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	UNIT	MM	王冠		01007-U2AM001-X			
X	±0.25	X'	±2°	比例	1:1	雷永健		USB A公四件套0.35华宝款L=36			
XX	±0.30	XX'	±1°	SCALE		审核		PRODUCT NO.			
XXX	±0.15	XXX'	±0.5°	DATE	2009/10/20	批准	雷永健	角法	版本	AO	
				DATE		APPD		VIEW			