
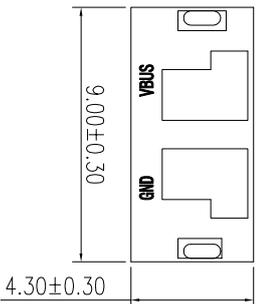
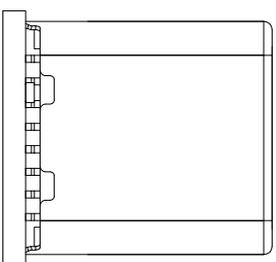
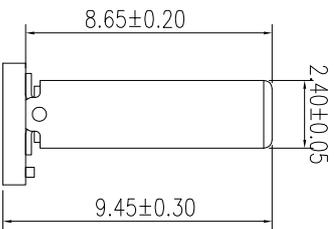
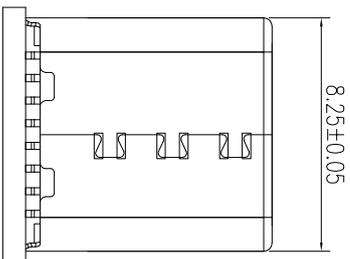
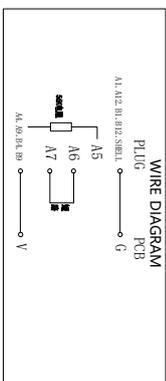


# RoHS 客户图

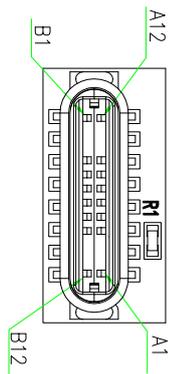

PART NO: 8001M-1600014-A

SERISE: TYPE C

PLUG

serial number

Variable

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

## 备注:

### 1. 原材料

- 1.1 塑胶材质: LCP+30%GF 94V-0 黑色
- 1.2 端子材质: C5191
- 1.3 卡钩材质: SUS 201
- 1.4 壳子材质: SUS 201
- 1.5 PCB FR4 2层板

### 2. 机械性能:

- 2.1 插入力: 6~20N, 插拔50000次后5~20N.
- 2.2 拔出力: 8~20N, 插拔50000次后6~20N.
- 2.3 耐久寿命5000 CYCLES.

### 3. 电气性能:

- 3.1 额定电流: 3A MAX.
- 3.2 额定电压: 20V MAX.
- 3.3 耐电压: 100V AC.
- 3.4 接触电阻: 40mΩ MAX(initial), 50mΩ MAX(10000次试验后).
- 3.5 绝缘电阻: 100MΩ MIN.

### 4. 电镀规格:

- 4.1 端子: 镍底40u"Min 接触点镀金1u"
- 4.2 外壳: 哑镍 表面镀镍40u"Min 盐雾24H
- 4.3 卡钩: 素材
- 4.4 焊接处镀锡20~40u"
- 5 环境温度: 温度范围: -30°C ~ +85°C.

6. 包装方式: PE袋 1000PCS/袋

7. 环保要求: ROHS REACH

## 产品图

PRODUCT CHART DWG

### 公差一览表

Pin No.	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
Signal Name	GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
Pin No.	GND	TX2+	TX2-	VBUS	Vccorn	B1	B2	B3	B4	B5	B6	B7
Signal Name	GND	TX2+	TX2-	VBUS	Vccorn	B1	B2	B3	B4	B5	B6	B7

PIN ASSIGNMENT:

## 深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	8001M-1600014-A
比例 SCALE	1:1	审核 CHKD	雷永健 Leiyoungjian	产品名称 PRODUCT NO.	(001)58K(电阻) A6 A7短路款 1#9, 5#两个焊点
日期 DATE	2009/10/20	核准 APRD	雷永健 Leiyoungjian	联系方式 Mailbox/ web	mailbox: sale1@xfl.com www. xfl.com. com