
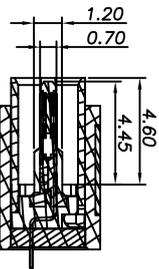
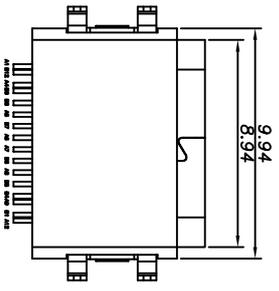
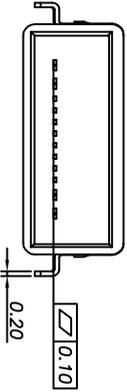
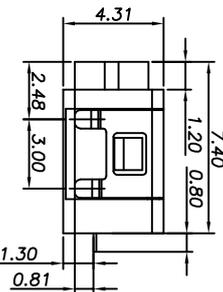
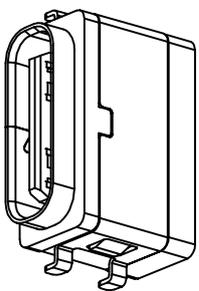
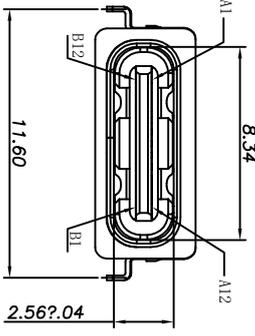


RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

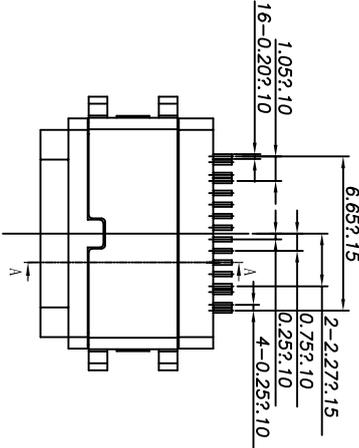

SECTION A-A

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UJ94 V-0.
 - 2.COVER: STAINLESS STEEL.
 - 3.CONTACTS: COPPER ALLOY
 - 4.MID PLATE: STAINLESS STEEL
 - 5.SHELL: STAINLESS STEEL
 - 6.0-RING: SILICONE RUBBER,BLACK
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - SEE TABLE 1 ON THE FUNCTIONAL AREA OF CONTACT.
 - SEE TABLE 1 ON THE SOLDER AREA OF CONTACT.
 - 2-2.SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3.COVER:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-4.MID PLATE:
 - CLEAR ONLY.

- 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 5~20N.
 - 3-2.REMOVAL FORCE: 8~20N.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1. CURRENT RATING:5.0A
 - VOLTAGE RATING:5.0V
 - 4-2. LCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
 - SHIELD: 50mΩ/MAX.
 - LCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1 MINUTE.
- 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25℃~+85℃.
 - 6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

7. WATER PROOFNESS:THISPRODUCTS BASED ON IPX7.

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

PRODUCT CHART DWG		公差一览表		单位		比例		日期	
TOLERANCE	UNLESS OTHERWISE	UNIT	SCALE	DATE	DATE	DATE	DATE	DATE	DATE
X	±0.30	X'	±5'						
X	±0.25	X'	±2'						
.XX	±0.30	.XX'	±1'						
.XXX	±0.15	.XXX'	±0.5'						

