

RoHS 客户图






目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



INTERFACE(FRONT VIEW)											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND							VBUS				GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SINGAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

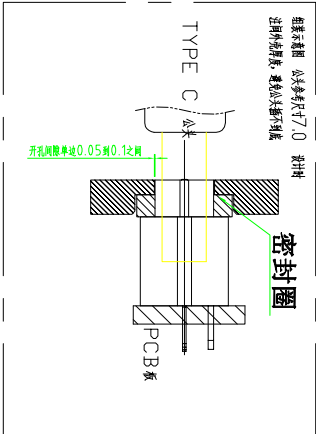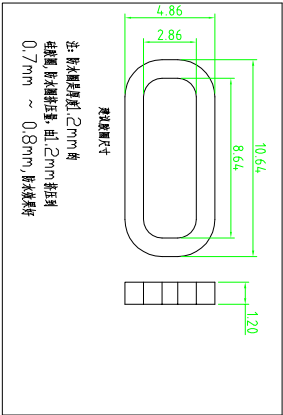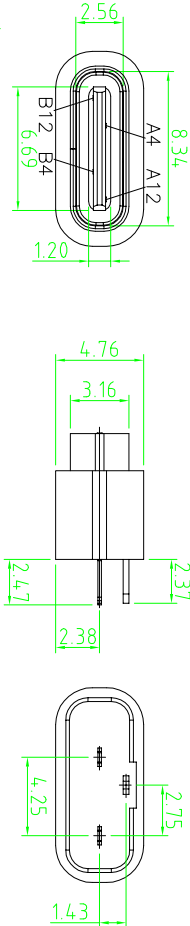

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES

5		1		
4	Shell	1	SUS304 Ni Plating T=0.30mm	Ni-40-120u ¹
3	Housing2	1	LCP(G.F.30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni-40-160u ¹ Au/Cu Plating T=0.20mm OTHER AREAG/F
1	Housing	1	PAGT (G.F.30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

產品圖 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				單位 UNITS	MM	制圖 DRAWING	王冠 Wangguan
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHD	雷永健 Leiyongjian
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健 Leiyongjian
.XXX	±0.15	.XXX'	±0.5°	角法 VIEW			