



1 2 3 4 5 6 7 8 9 10

RoHS 客户图





目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

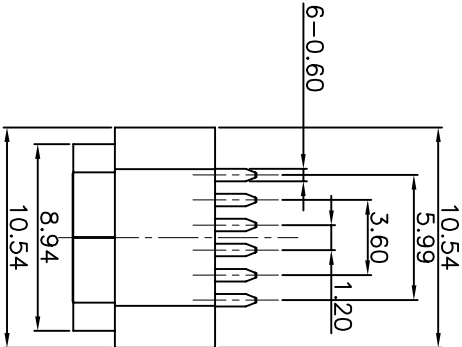

Recommended P.C.B. Layout
Unspecified Tolerance: ± 0.05
(Top view)

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS $T=1.0\text{mm}$
DEFAULT TOLERANCE ± 0.05

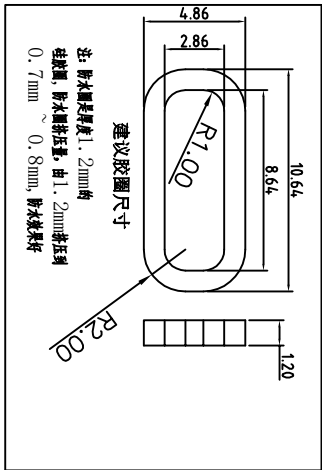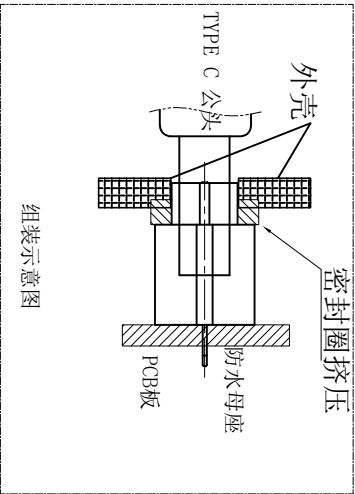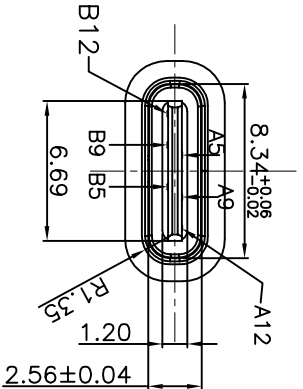

NOTES:
SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- CONTACT RESISTANCE: 40 MILLIOHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES

PART NO: 8001F-FS06019-X

SERISE: TYPE C
Receptacle
serial number

Variable



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS304 Ni Plating $T=0.25\text{mm}$	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating $T=0.20\text{mm}$	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO	8001F-FS06019-X
X	± 0.30	X'	$\pm 5^{\circ}$	MM	王冠 Wangguan	产品名称 PRODUCT NO	TYPE C 6P 180度插板防水型母座=6, 8
.XX	± 0.25	X"	$\pm 2^{\circ}$	SCALE	雷永健 Lei Yongjian	联系方式 CONTACT NO	mailto:sale@xfll.com, www.xfll.com
.XXX	± 0.15	.XXX'	$\pm 0.5^{\circ}$	DATE	2009/10/20	核准 APPRO	雷永健 Lei Yongjian