

1

2

3

4

5

6

7

8

9

10

目錄
MAPX

變更內容
MODIFICATION

日期
DATE




A0

NEW

09-10-20

Rohs

客戶圖

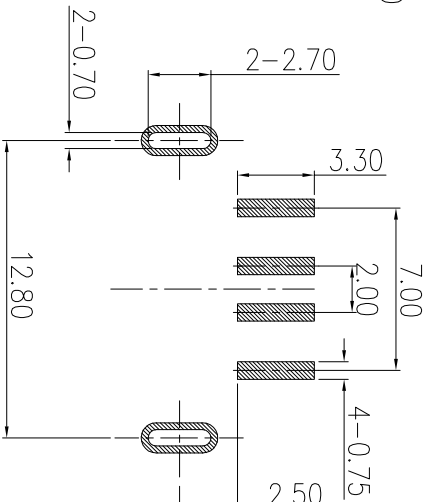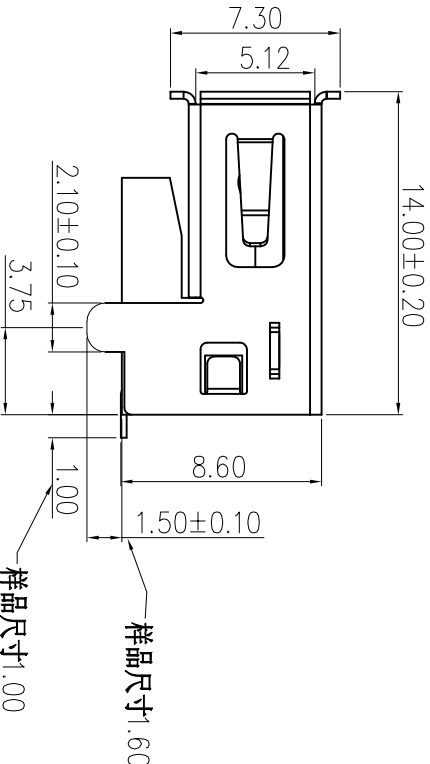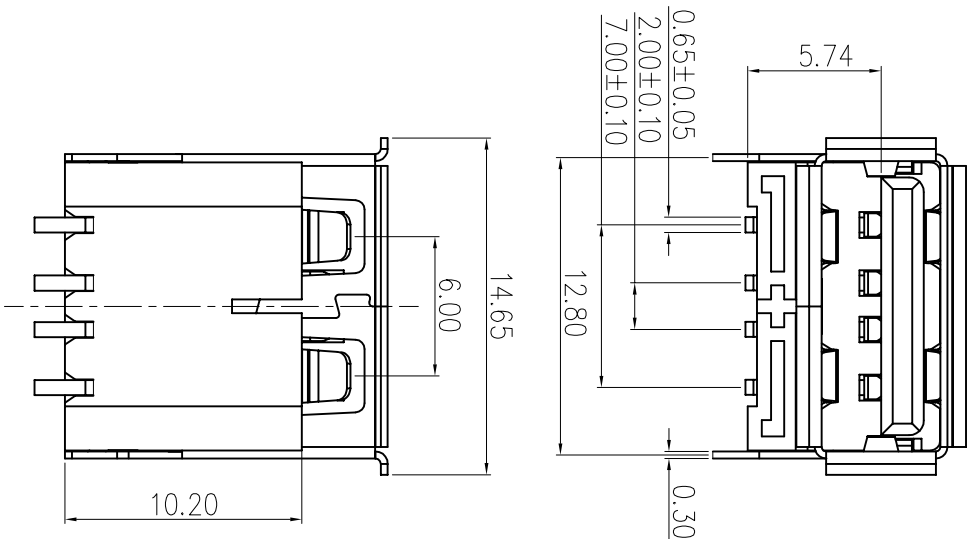

P.C.B LAYOUT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNITS	±0.30	±0.25	±0.30	±0.15
X	±0.30	±0.25	±0.30	±0.15
XX	±0.30	±0.25	±0.30	±0.15
XXX	±0.30	±0.25	±0.30	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

单位 UNITS	MM
比例 SCALE	1:1
日期 DATE	2009/10/20
制图 DRAWING	王冠
审核 CHKD	雷永健
批准 APRD	雷永健
产品料号 PRODUCT PART NO	26009-U2AF008-X
产品名称 PRODUCT NO	USB AF 90度有边SMT加高 H=8.6
角法 VIEW	⊕
版本 VER	A0

NOTES:

1.MATERIAL:

1.1 Housing:thermoplastic plastics

1.2 terminals:Copper Alloy

Gold plated in contact area:

Tin plated in termination

Nickel Plated overall

1.3 Shell:Steel

Nickel Plated overall

2.ELECTRICAL CHARACTERISTICS:

2.1 Rating Current :1.5 Ampere

2.2 Rating Voltage :30 V Max

2.3 Contact Resistance:30 Milli ohms

2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

3.1 Connector Mating force: 35N MAX(3.57kgf)

3.2 Connector Unmating force:10N min(1.02kgf)

3.3 Durability:1500Cycles.

4.ENVIRONMENT CHARACTERISTICS:

4.1 Operating temperature:-0℃ to +50℃

4.2 Storage temperature:-20℃ to +60℃

由Autodesk 教育版产品制作