

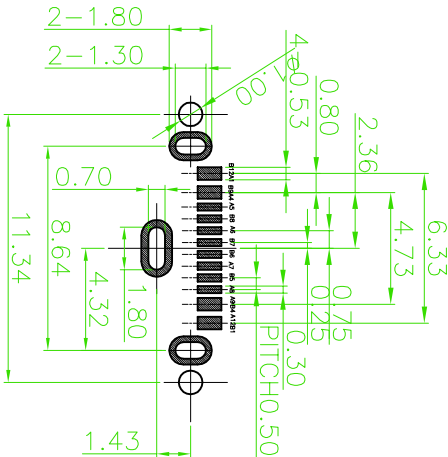






RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

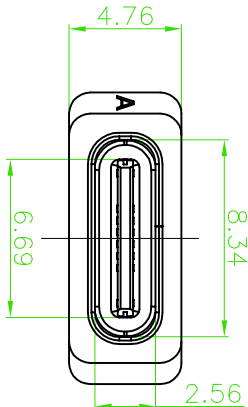

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:10,000 CYCLES

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE:±0.05)

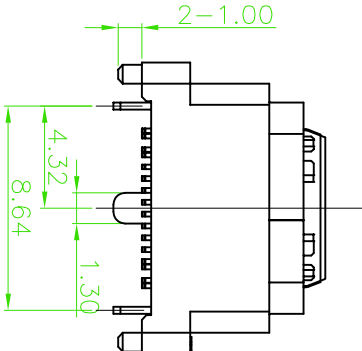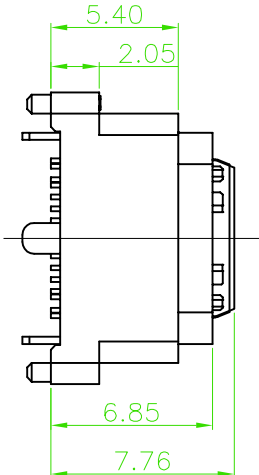

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

深圳市鑫风雷电子有限公司

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	MM	制图	王冠	产品料号	00208-UCAF006-A
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING		PRODUCT PART NO.	
X ±0.30	X'	±5'	比例	1:1	产品名称	TYPE C 16P母座立式SMT 防水 H=6.85
X ±0.25	X'	±2'	SCALE		PRODUCT NO.	
.XX ±0.30	.XX'	±1'	日期	2009/10/20	角法	☉ ☐
.XXX ±0.15	.XXX'	±0.5'	DATE	2009/10/20	APPD	雷永健
					VER	版本
						A0