

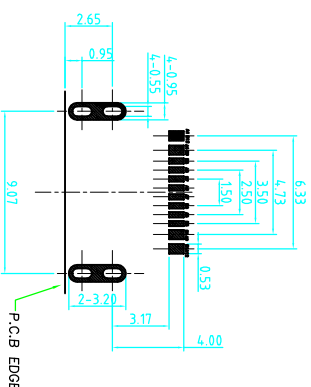


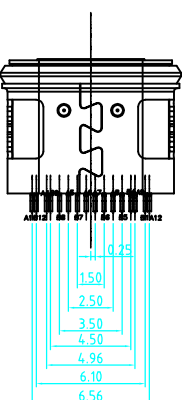

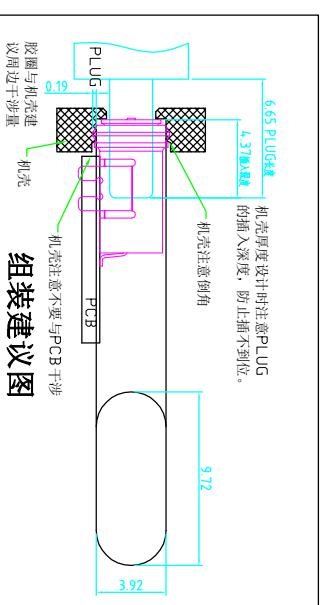



7	8	9	10
目錄 MAPX	設定內容 MODIFICATION	日期 DATE	
AO	NEW	03-10-20	



RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

1. MATERIAL SPECIFICATION:
 - 1.1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0
 - 1.2. CONTACTS: COPPER ALLOY
 - 1.3. MID PLATE: STAINLESS STEEL
 - 1.4. FRONT SHELL: STAINLESS STEEL
2. MECHANICAL PERFORMANCE:
 - 2.1. INSERTION FORCE: 5~20N.
 - 2.2. REMOVAL FORCE: 6~20N.
 - 2.3. DURABILITY: 10000 CYCLES.
3. ELECTRICAL PERFORMANCE:
 - 3.1. CURRENT RATING: 3.0A
 - 3.2. VOLTAGE RATING: 12V
- 3.2. I.D.R.:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
- 3.3. INSULATION RESISTANCE: 100MΩ MIN
- 3.4. DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
4. ENVIRONMENTAL PERFORMANCE:
 - 4.1. OPERATING TEMPERATURE: -25°C~+85°C.
 5. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

PART NO: 800IF-FS16004-X

SERISE: TYPE C

Receptacle

1000

产品图		深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG		Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	王冠 Wangguang	产品料号 PRODUCT PART NO.
X. ±0.30	X'. ±5°	MM	审核 CHECK	雷永健 Leiyongjian	8001F-FS16004-X
.X. ±0.25	.X'. ±2°	比例 SCALE		产品名称 PRODUCT NAME	
.XX. ±0.20	.XX'. ±1°	1:1		PRODUCT NO.	
.XXX. ±0.15	.XXX'. ±0.5°	日期 DATE			TYPE C 16P母座板上防水 H=3.52 L=7.46
		2009/10/20	核准 APPROVED	联系方式 莫小姐 Miss Mo	
				mailbox: sale1@xf.com	
				www.xf.com.com	