RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

	NAME	MATERIAL	PLATING	COLOR
5	COVER	PBT+30%G.F, UL94V-0		BLACK
4	HOUSING	PBT+30%G.F, UL94V-0		BLACK
3	MIDDLE BULLET	SK7	80u"Nickel Plated & 50u"Copper Plated	
2	SHELL	SPCC-SD	Bright Tin 100u" Plated & Nickel 50u" MinPlated	
1	CONTACTS (1,2,3,4PORT)	Copper Alloy	1u" PLATING ON CONTACT AREA. 100u" MATTE Tin PLATING ON SOLDER TAIL AREA. 50u" NICKEL UNDERPLATING OVERALL.	

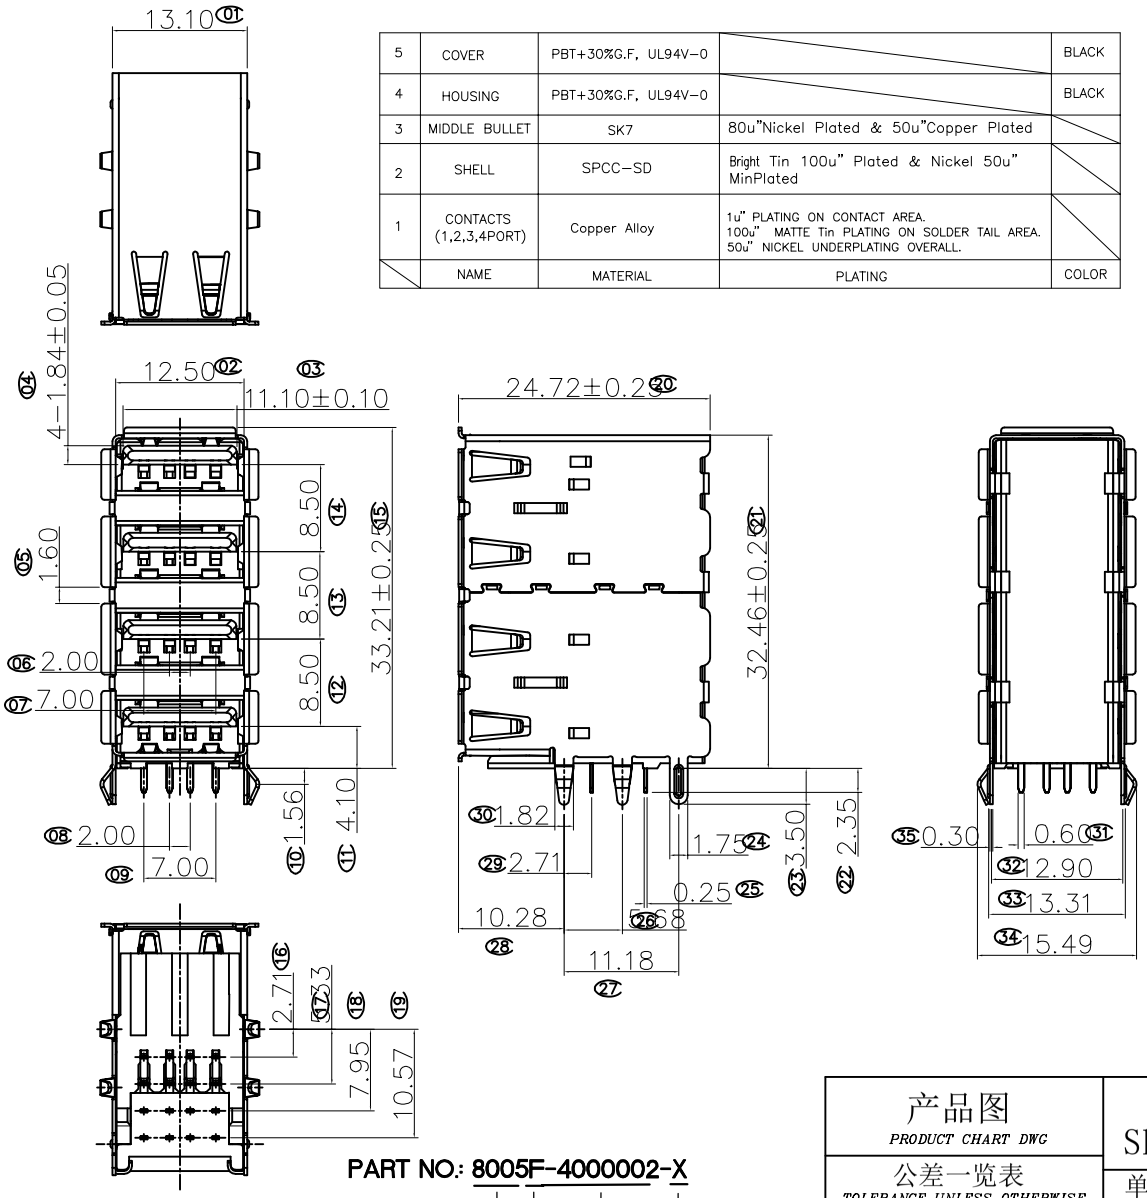

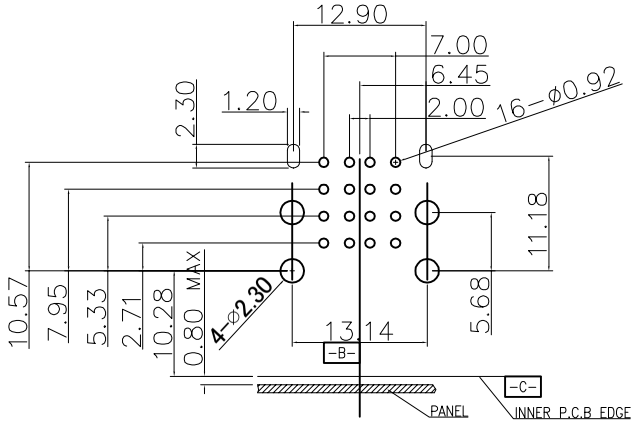

RECOMMENDED P.C.B. LAYOUT (1) (THICKNESS=1.6mm)

(GENERAL TOLERANCE: ?.05)

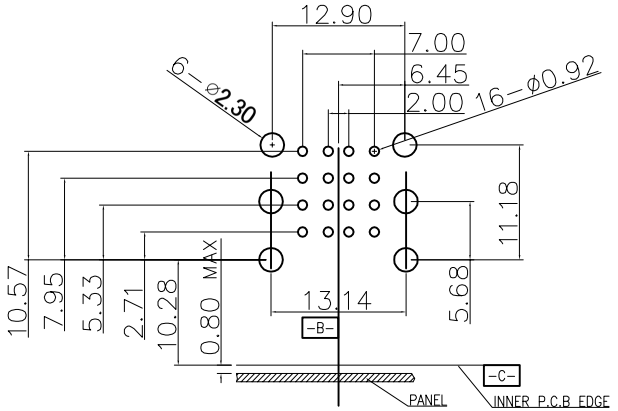

RECOMMENDED P.C.B. LAYOUT (2) (THICKNESS=1.6mm)

(GENERAL TOLERANCE: ?.05)

PART NO.: 8005F-4000002-X

SERISE: Multilayer

Receptacle

serial number

Variabler

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	8005F-4000002-X
X.	±0.30	X°.	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	四层 USB2.0 弯脚边
.X	±0.25	.X°	±2°						
.XX	±0.30	.XX°	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER A0
.XXX	±0.15	.XXX°	±0.5°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作