

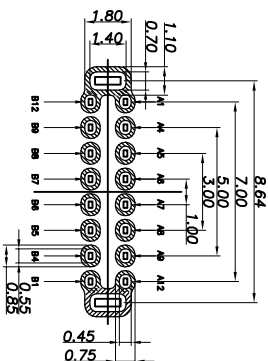





1 2 3 4 5 6 7 8 9 10

Rohs 客户图






RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



A1	QW	B12	QW
A2	QW	B11	QW
A3	QW	B10	QW
A4	QW	B9	QW
A5	QW	B8	QW
A6	QW	B7	QW
A7	QW	B6	QW
A8	QW	B5	QW
A9	QW	B4	QW
A10	QW	B3	QW
A11	QW	B2	QW
A12	QW	B1	QW

- NOTE:
1. MATERIAL SPECIFICATION:
 - 1-1. MATERIAL: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - 1-2. REPAIR: REPAIRABLE BY SOLDERING.
 - 1-3. FRONT SHELL: STAINLESS STEEL.
 - 1-4. MID PLATE: STAINLESS STEEL.
 - 1-5. BACK SHELL: STAINLESS STEEL.
 2. ELECTRICAL SPECIFICATION:
 - 2-1. INPUT VOLTAGE: 100V AC.
 - 2-2. INPUT CURRENT: 100mA.
 - 2-3. OUTPUT VOLTAGE: 5V DC.
 - 2-4. OUTPUT CURRENT: 100mA.
 - 2-5. POWER CONSUMPTION: 10W.
 3. MECHANICAL SPECIFICATION:
 - 3-1. DIMENSIONS: SEE DRAWING.
 - 3-2. WEIGHT: 10g.
 - 3-3. TOLERANCE: ±0.1mm.
 - 3-4. SURFACE FINISH: POLISHED.
 - 3-5. COATING: GOLD PLATING.
 4. ENVIRONMENTAL SPECIFICATION:
 - 4-1. TEMPERATURE RANGE: -25°C to +85°C.
 - 4-2. HUMIDITY RANGE: 5% to 95% RH.
 - 4-3. VIBRATION: 10g.
 - 4-4. SHOCK: 10g.
 - 4-5. CORROSION: 1000HRS.



PART NO: 8001F-1600081-D

SERISE: TYPE C

Receptacle

serial number

Variable

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	制图	审核	核准	产品料号	产品名称	角法	版本
TOLERANCE UNLESS OTHERWISE SPECIFIED	MM	王冠	雷永健	雷永健	8001F-1600081-D	TYPE C 16P母座180度插板 H=7.4 两脚有弹	ASPD	A0
X ±0.30	X' ±5'	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1
XX ±0.25	X' ±2'	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1
XXX ±0.15	XXX' ±0.5'	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1	比例 1:1