




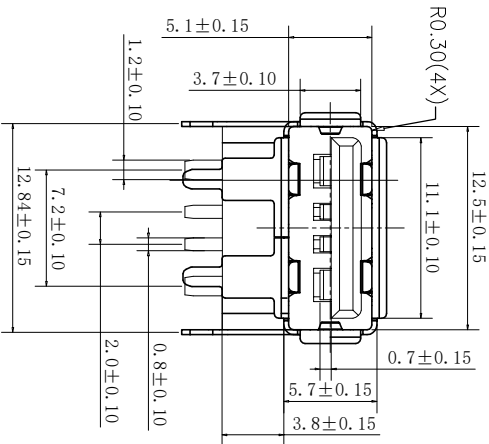
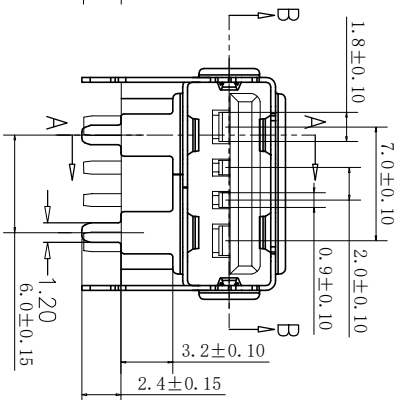
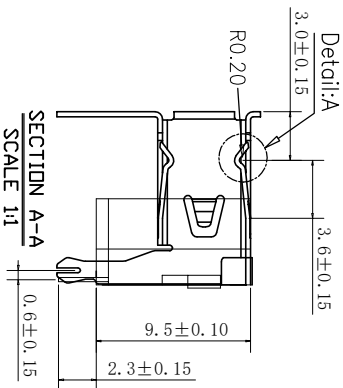


RoHS 客户图



1. 端子: Contact:Plated Gold in Mating Area:
Tin/Lead On Solder Talls.接触点镀金1唛, 脚镀锡100唛
2. 外壳: Shell:
Nickel Plating . 镀镍80唛
额定电流3A/宽PIN, 1. 5A/窄PIN, 盐雾48H, 镀锡部分盐雾12H.

特性: Specifications:
电气: Electrical:
1. 接触阻抗: Contact Resistance:
30 milliohms MAX
2. 耐电压:Dielectric With Standing Voitage:
250 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN
机构: Mechanical:
1. 结合力: Mating Force:
35 N MAX 最大 35 N
2. 拔出力: Unmating Force:
8 N MIN 最小 8 N

材料: Matorial:
1. 塑胶: PBT.
2. 端子: Contact: C2680, T=0. 25±0. 01
3. 外壳: Shell: C2680, T=0. 3±0. 01

电镀: Finish:

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠 CHAO	产品料号 PRODUCT PART NO
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 雷永健	产品名称 大电流USB 10. 6后两脚有边加高H=9. 5
XX	±0.30	XX'	±1°	日期 DATE	2009/10/20	核准 雷永健	角法 V/PW
XXX	±0.15	XXX'	±0.5°				版本 A0