
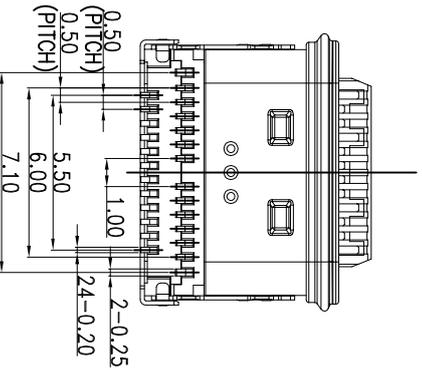

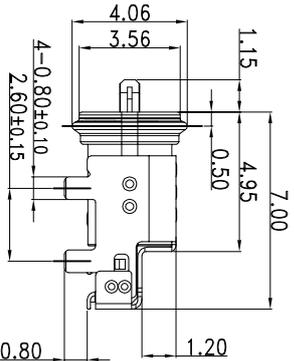
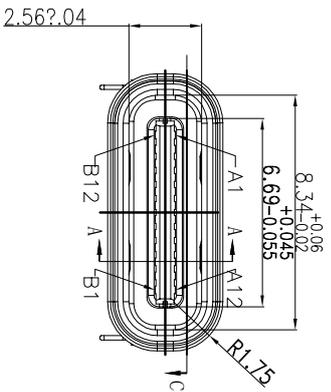
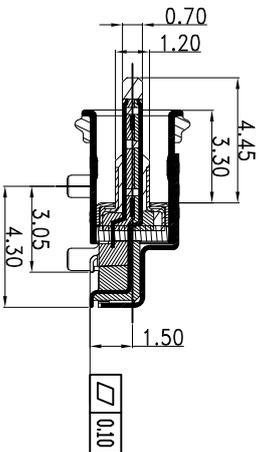


RoHS 客户图

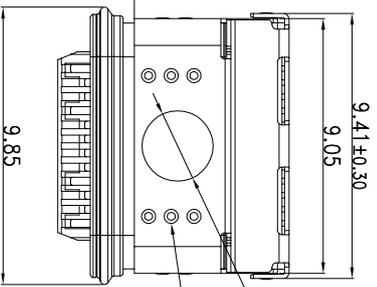

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	20-01-20

NOTE:

1. MATERIAL SEE TABLE 1.
2. PLATING SPECIFICATION: SEE TABLE 1
3. MECHANICAL PERFORMANCE:
 - 3-1. INSERTION FORCE: 0.5~2.0kgf.
 - 3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3. DURABILITY: 10000 CYCLES.
4. ELECTRICAL PERFORMANCE:
 - 4-1. CURRENT RATING: 5.0A VOLTAGE RATING: 5V
 - 4-2. LCCR: LCCR & GND PINS AND OTHER PINS: 30mΩ/PIN MAX. LCCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3. INSULATION RESISTANCE: 100MΩ MIN
 - 4-4. DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - 6. I.R. REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

Pin Assignment:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	A4	B5	B2	B1

PART NO: 8001F-FS24004-X

SERISE: TYPE C

Receptacle

serial number

Variable

产品图

PRODUCT CHART DWG






公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT
X	±0.30	mm
X	±0.25	mm
XX	±0.20	mm
XXX	±0.15	mm

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	mm	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	8001F-FS24004-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 24P母座板上双贴片电话片外编1.18
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	
				版本 VER	A0

RoHS 客户图

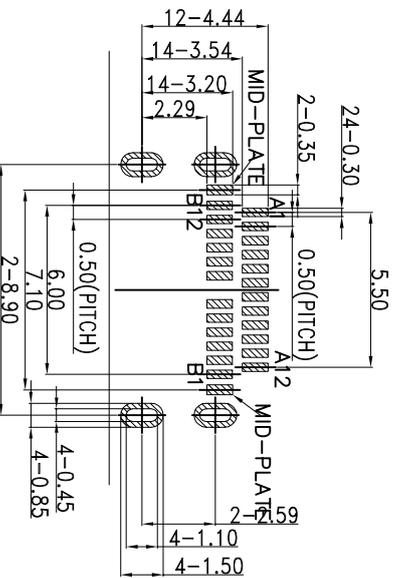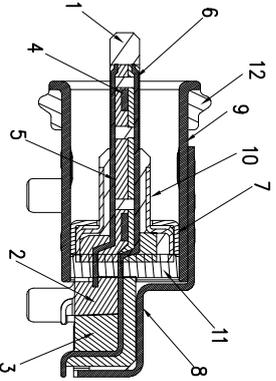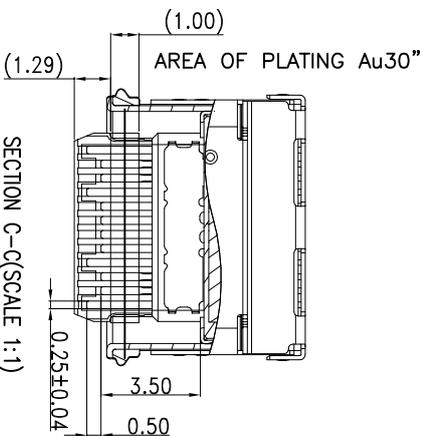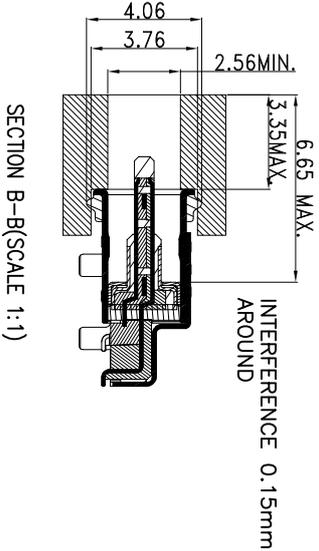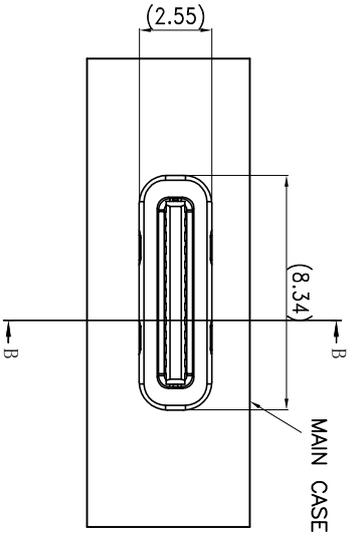

THICKNESS: 0.60MM; DEFAULT TOLERANCE: ±0.05





RECOMMENDED PCB LAYOUT (TOP VIEW)

ITEM	DESCRIPTION	QTY	MATERIAL
12	GLUE	1	GLUE
11	ROBOT	1	ROBOT
10	EM1	1	STAINLESS STEEL
9	MAIN SHELL	1	STAINLESS STEEL
8	OUT SHELL	1	STAINLESS STEEL
7	INNER SHELL	1	STAINLESS STEEL
6	TOP TERMINAL	1	COPPER ALLOY
5	BOTTOM TERMINAL	1	COPPER ALLOY
4	MID PLATE	1	STAINLESS STEEL
3	TOP HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC UL94 V-0
2	BOTTOM HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC UL94 V-0
1	MAIN HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC UL94 V-0

公差一览表		单位		比例		日期		核准		产品料号		产品名称		图法		版本	
TOLERANCE UNLESS OTHERWISE	UNITS	SCALE	DATE	APPROVED	DATE	PRODUCT NO.	TYPE	VIEW	VER	8001F-FS24004-X	TYPE C 24P 母座板上双贴防水贴片外端1.15	3D	2D	3D	2D	VER	
X	±0.30	X'	±5'	1:1	2009/10/20	8001F-FS24004-X	TYPE C 24P 母座板上双贴防水贴片外端1.15	3D	2D	3D	2D	3D	2D	3D	2D	VER	
.XX	±0.20	.XX'	±2'														
.XXX	±0.15	.XXX'	±1.5'														

RoHS 客户图

目錄 MAPX	修改內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

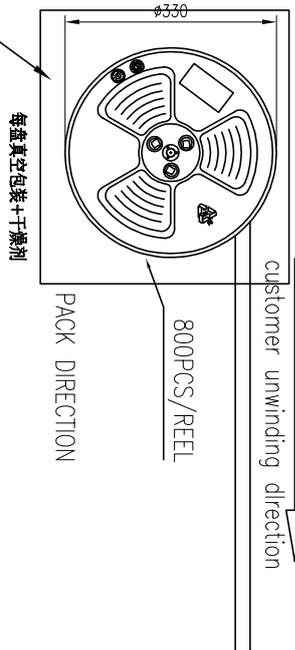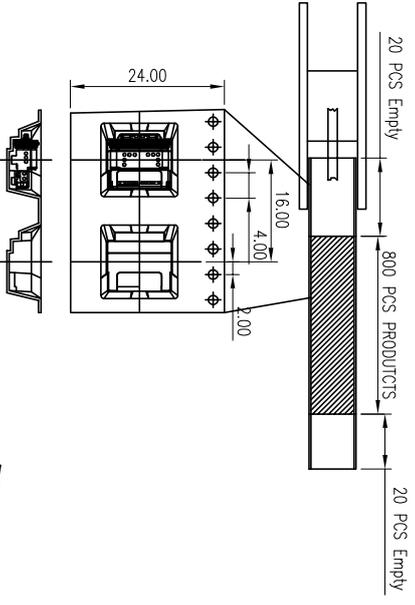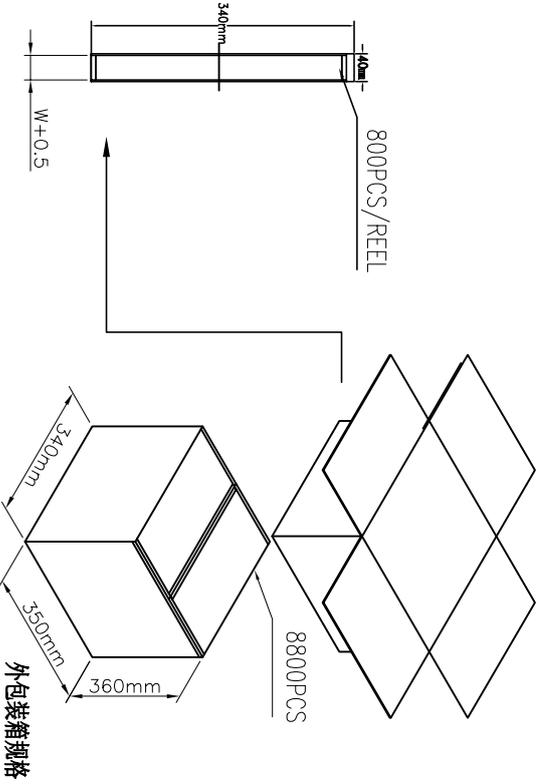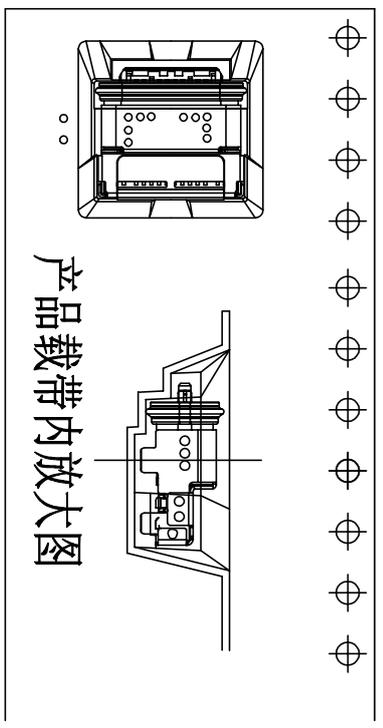

- 注意：
1. 纸箱：纤维板，双层壁，材质K636K，规格350*340*360mm，抗压10KG. 纸箱正唛无印字，侧唛印规格字样.
 2. 包装真空袋：真空/热封/350*380mm/厚度0.4mm/
 3. 包装载带：透明载带，厚度0.35+/-0.05mm，包装盘厚度27.8mm，直径330mm
 4. 每个袋子都应包括干燥剂*2。
 5. 包装盘竖向摆放在纸箱内，每箱11盘：800*11=8800PCS/箱
 6. 外箱上贴物料标签及RHOS标签

CONNECTOR (PCS)	REEL	CARTON
	800	8800

产品图 PRODUCT CHART DWG		公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS		比例 SCALE		日期 DATE		制图 DRAWING		产品料号 PRODUCT PART NO.		产品名称 PRODUCT NO.		角法 VIEW		版本 VER	
X	±0.30	X'	±5'	MM	1:1	2009/10/20	王冠	8001F-FS24004-X	TYPE C 24P母板板上双端SMT 舌片外插1.18 脚本型	雷永健	雷永健	8001F-FS24004-X	8001F-FS24004-X	雷永健	雷永健	A0	A0	A0	
.XX	±0.30	.XX'	±2'																
.XXX	±0.15	.XXX'	±0.5'																