


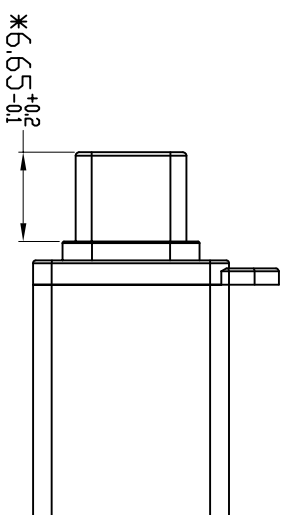



7	8	9	10
目録 MAPX	設定内容 MODIFICATION		日期 DATE
A0	NEW		09-10-20

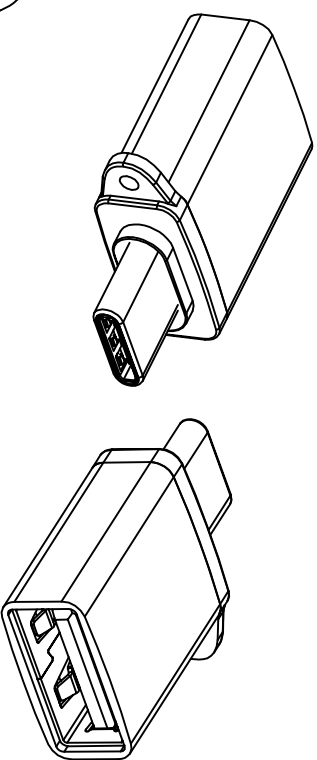

备注:

1. 符合RoHS2.0环保标准。
2. 需过3kg吊重, 10s
3. 标记有“*”为品质管控重点。

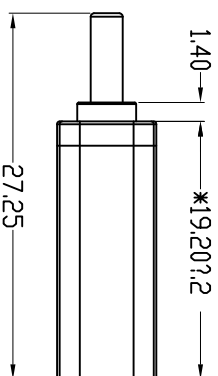

3	PCBA		Type-CF to USB 3.1 AM (PCBA)	1 Set
2	外模		PVC-35P 黑色	1 Set
1	铝壳		喷砂 (150#) 阳极氧化 苹果灰色 L14. 7*W6. 9*H6. 7mm	1 PCS
序号	物料名称	物料编号	规格描述	数量

产品图		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd					
PRODUCT CHART DWG							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	王冠 Wangguan	产品料号 Product Part No.	801 4X-0000002-B	
X.	±0.30	X.	±5°	审核 CHECK	雷永健 Leyongjian	产品名称 Product NO.	TYPE CM TO USB3.1 A型外壳材料头带吊钩款 L=27.2
.X.	±0.25	X"	±2°				
.XX	±0.20	.XX"	±1°				
.XXX	±0.15	.XXX"	±0.5°	日期 DATE	核准 APPD	雷永健 Leyongjian	联系方式 Mailbox/web
				2009/10/20			mailbox: salel@xficom.com www.xficom.com

PART NO: 8014 X-00000002-B

SERISE: Conversion plug

Variable	Definition	Source
Age	Age in years	Survey data
Gender	Male/Female	Survey data
Income	Annual income in USD	Survey data
Education	Years of schooling	Survey data
Health	Self-reported health status	Survey data
Marital Status	Married/Single/Divorced	Survey data
Religion	Religious affiliation	Survey data
Occupation	Current occupation	Survey data
Urban/Rural	Living in urban or rural area	Survey data
Time	Time taken to complete survey	Survey data

serial number

Variable	Erwartungswert	Standardabweichung	Korrelationskoeffizient
...	...	...	...