
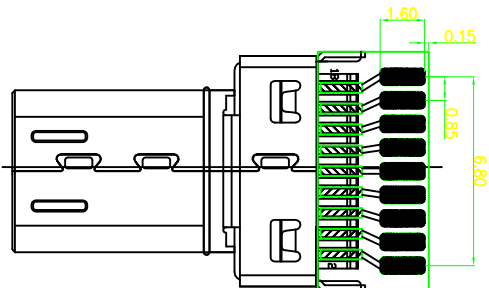
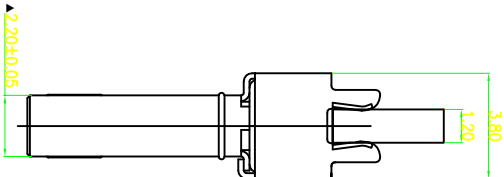
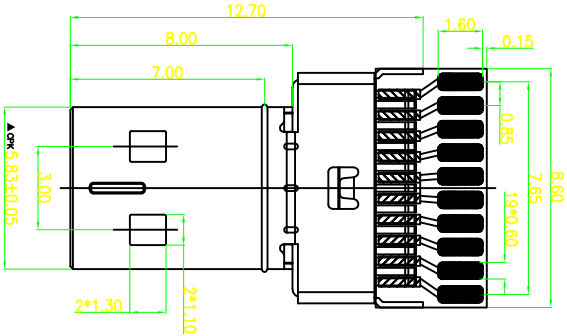


12345678910

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

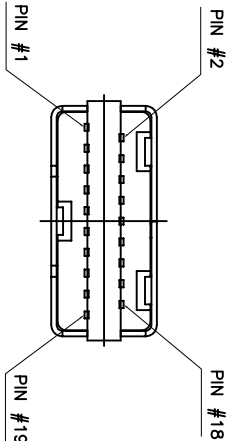


- NOTE:
- Electrical
 - Rated Voltage:40V AC/DC maximum
 - Rated Current:0.3A max.
 - Dielectric strength:150V AC/1 minute
 - Insulation Resistance:150V DC 10MΩ min.
 - Contact Resistance:40 mΩ Max.
 - Mechanical
 - Insertion Force Max:4.5kgf max.
 - Removal Force Min:0.5kgf min. , 2.5kgf max.
 - Durability: 5,000 cycles at 100±50 cycles per hour
 - Plating
 - Terminal:Contact area: gold plated over 50u" NI min. Soldered area:100u" mist TIN plated over 50u" NI min.
 - Shell: G/F plated over 50u" NI min.
 - Ambient Temperature:-25° C To +85° C

LATCH	PBT	1	BLACK, UL 94V-0
SHELL	C2680	1	PLATED OVER 100u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT (SHORT)	C5191	10	SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HOUSING	LCP	2	BLACK, UL 94V-0
HOUSING	LCP	1	BLACK, UL 94V-0
PART NAME	Mechanical	QT'Y	NOTE






产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	审核 CHKD	产品名称 PRODUCT NO.	角法 VIEW
X	±0.30	X'	±5'	王冠	雷永健	HDMI D TYPE 19P公头夹板1.2带板	00612-HDMI1DM3-X
.X	±0.25	.X'	±2'	比例 SCALE	1:1		
.XX	±0.30	.XX'	±1'	日期 DATE	2009/10/20	核准 APPD	雷永健
.XXX	±0.15	.XXX'	±0.5"			版本 VER	A0

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

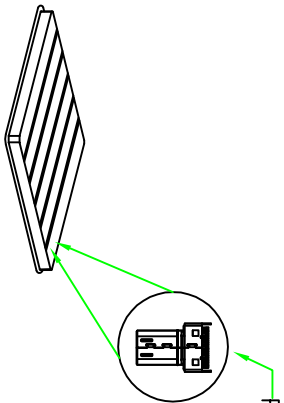

① TRAY(1PCS).200PCD/TRAY

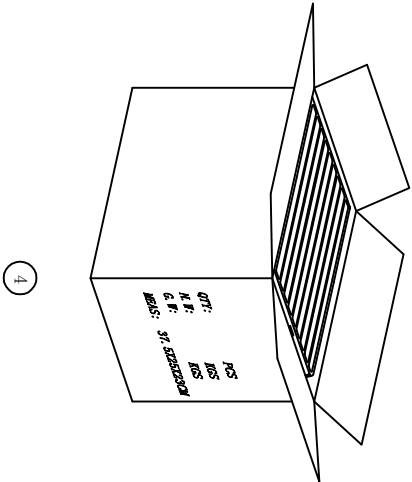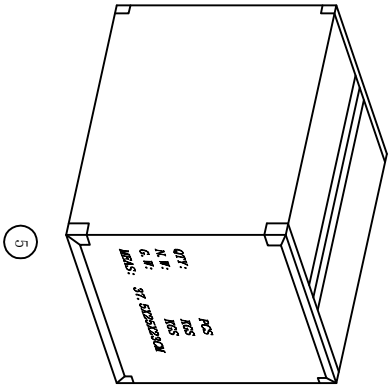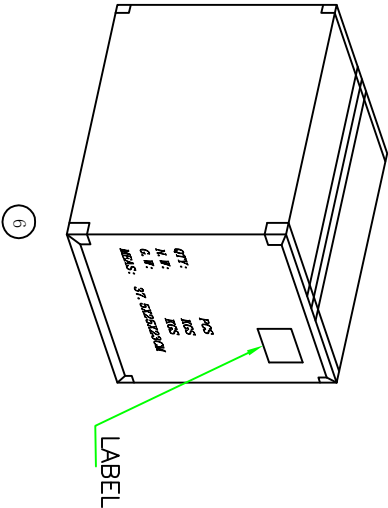

CONNECTOR (PCS)	REEL/TRAY	CARTON
	200PCS	15000PCS

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	批准 APPD	雷永健
.XXX	±0.15	.XXX'	±0.5°	角法 VIEW		版本 VER	A0