

1

2

3

4

5

6

7


8

9

10




RoHS

客户图

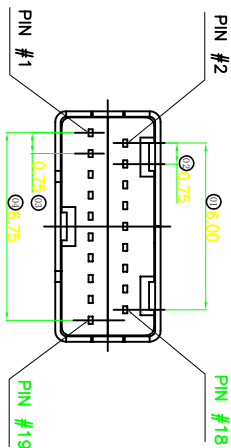

NOTE:

1. Electrical
 - 1.1. Rated Voltage: 40V AC/DC maximum
 - 1.2. Rated Current: 0.3A max.
 - 1.3. Dielectric strength: 150V AC/1 minute
 - 1.4. Insulation Resistance: 150V DC 10MΩ min.
 - 1.5. Contact Resistance: 30M Max.
2. Mechanical
 - 2.1. Insertion Force Max: 4.5kgf max.
 - 2.2. Removal Force Min: 0.5kgf min., 2.5kgf max.
 - 2.3. Durability: 5,000 cycles at 100+150 cycles per hour
3. Plating
 - 3.1. Terminal: Contact area: gold plated over 50u" NI min. Soldered area: 100u" mist TIN plated over 50u" NI min.
 - 3.2. Shell: G/F plated over 50u" NI min.
 - 3.3. Shell: G/F plated over 50u" NI min.
4. Ambient Temperature: -25. C To +85. C

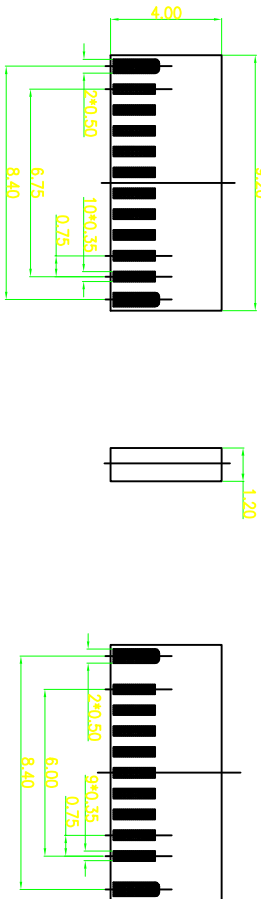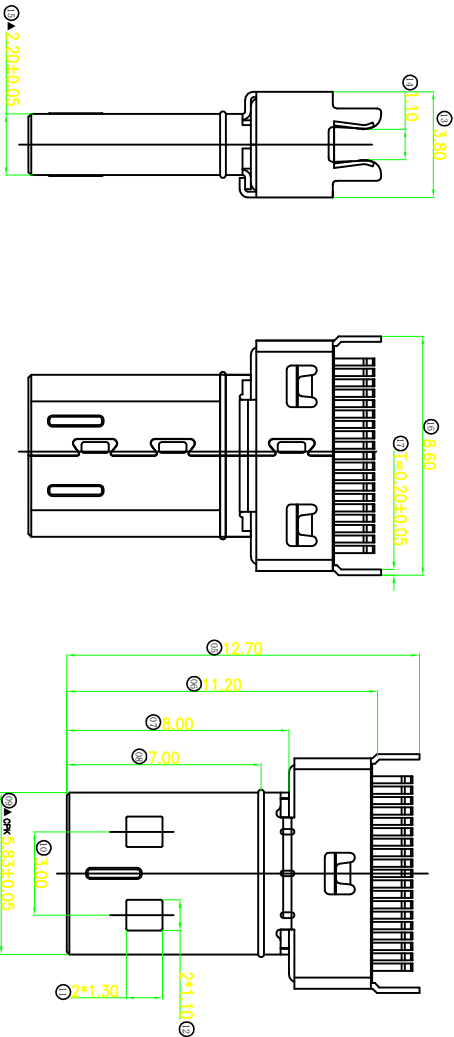

RECOMMENDED PCB LAYOUT
(THICKNESS=1.20±0.05mm)

产品图







深圳市鑫风雷电子有限公司

公差一览表				单位			
TOLERANCE UNLESS OTHERWISE SPECIFIED				UNITS			
X	±0.30	X'	±5°	比例	1:1	审核	雷永健
X	±0.25	X'	±2°	SCALE		核准	雷永健
.XX	±0.30	.XX'	±1°	日期	2009/10/20	核准	雷永健
.XXX	±0.15	.XXX'	±0.5°	DATE		核准	雷永健

LATCH	PBT	1	BLACK, UL 94V-0
SHELL	C2680	1	PLATED OVER 100u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT (SHORT)	C5191	10	SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HOUSING	LCP	2	BLACK, UL 94V-0
HOUSING	LCP	1	BLACK, UL 94V-0
PART NAME	Mechanical	QT'Y	NOTE

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

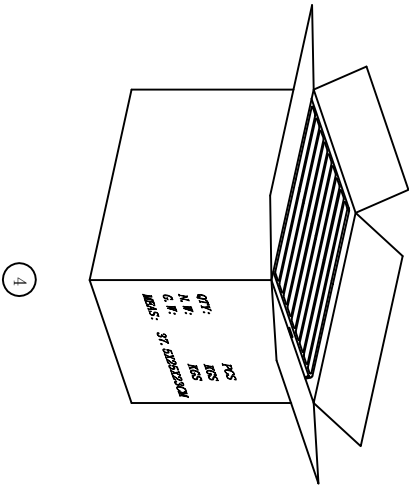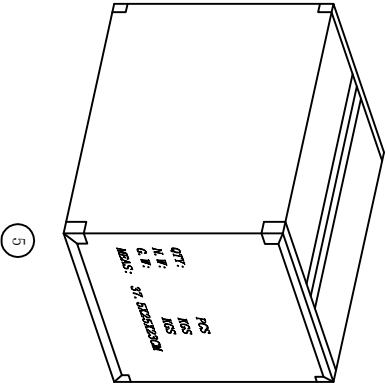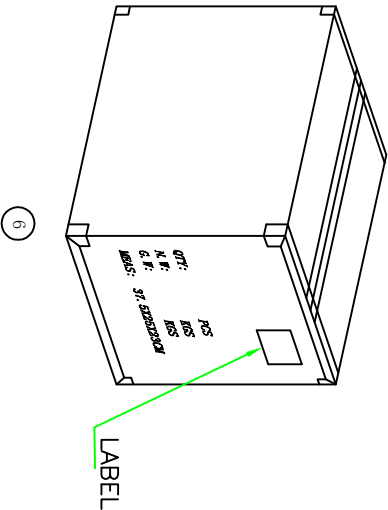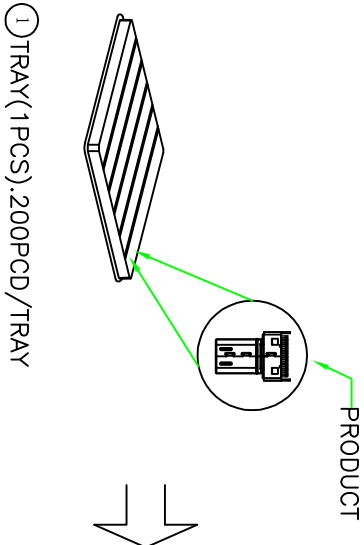

CONNECTOR (PCS)	REEL/TRAY	CARTON
	200PCS	15000PCS

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHECK	雷永健 CHND	产品名称 PRODUCT NO.	HDMI D TYPE 19P公头夹板1.2
.X	±0.25	.X'	±2°						
.XX	±0.30	.XX'	±1°						
.XXX	±0.15	.XXX'	±0.5°	日期 DATE	2009/10/20	核准 APPRO	雷永健	角法 VIEW	版本 VER
									AO