

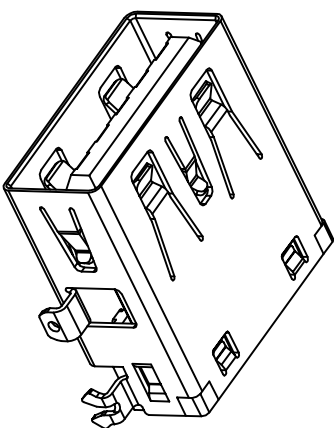
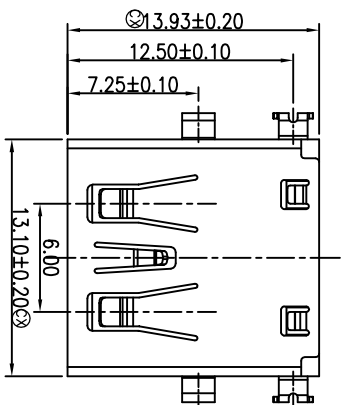


1 2 3 4 5 6 7 8 9 10


RoHS 客户图

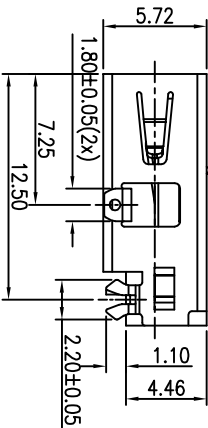


- SPECIFICATIONS:
- 1.ELECTRICAL CHARACTERISTICS:
 - 1-1.CURRENT RATING: 1.8AMP AC MAX.
 - 1-2.CONTACT RESISTANCE: 30mΩ MAX.
 - 1-3.INSULATION RESISTANCE:100MΩ MIN.
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE:100V ACFOR MINUTE.
 - 2.MECHANICAL CHARACTERISTICS:
 - 2-1.INSERTION FORCE: 3.5Kgf MAX.
 - 2-1.WITHDRAWAL FORCE:1.02Kgf MIN.
 - 3.LIFE TEST: 1,500 CYCLES.
 - 4.TEMPERA RANGE:-25 °C TO +85 °C.
 - 5.OTHER GENERAL SPEC. TO REFER 2UB4033 SERIES SPEX.
 - 6.TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE.
 - 7.HALOGEN FERR PRODUCT IDENTIFICATION LABLE ON PACKAGING.
 - 8.PACKAGE:SEE"2UB4032 SERIES" PACKAG.
 - 9.FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - 10.⊗ PRESENT CRITICAL DIMENSIONS.

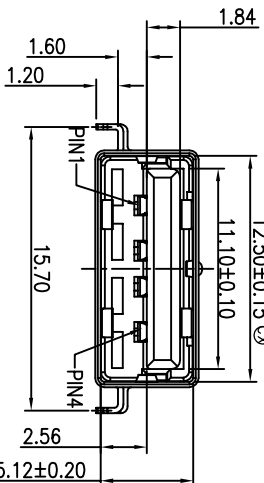

NO	DESCRIPTION	QTY	MATERIAL	PLATING
E	INK			
C	CONTACT(2.0)	4	C2680	SEE PART NO.
B	SHELL	1	SUS304	NICKEL PLATING
A	HOUSING	1	LCP,U194V-0	BLACK

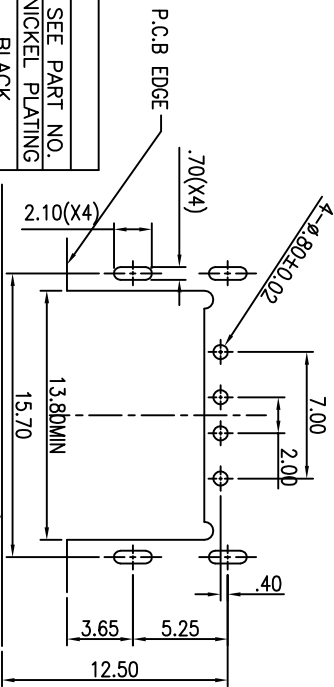

CONNECTOR EDGE——
RECOMMENDED P. C. B LAYOUT
TOLERANCE±0.05mm T=1.20±0.05

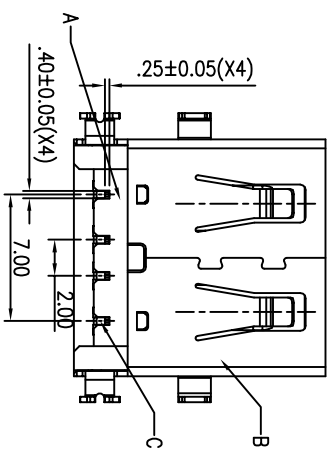

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位	MM	制图	王冠	产品料号	01007-U2AF011-X
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	USB2.0 四脚无源板1.2 CH=1.66 L=13.93
.XX	±0.25	.X'	±2°	SCALE		CHD		PRODUCT NO.	
.XX	±0.30	.XX'	±1°	日期	2009/10/20	核准	雷永健	角法	⊕ ⊖
.XXX	±0.15	.XXX'	±0.5°	DATE		APPD		版本	VER
									A0