









RoHS 客户图



A1	GN	B12	GN
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SD12
A6	DP1	B7	DP2
A7	DM1	B6	DP2
A8	SD11	B5	CC5
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GN	B1	GN



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

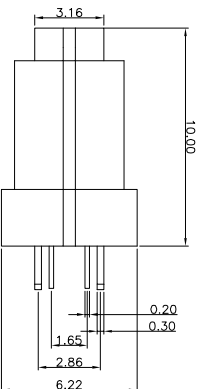

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTE:
备注:

1. MATERIAL SPECIFICATION:
1.1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
1.2. TERMINAL: COPPER ALLOY
1.3. FRONT SHELL: STAINLESS STEEL
1.4. MID PLATE: STAINLESS STEEL
2. PLATING SPECIFICATION:
2.1. TERMINAL:
2.1.1. 鍍金:
NI 30U MIN. UNDER PLATED OVER ALL.
鍍鍍底 30U MIN.
Au PLATED Golden Flash OVER NI
Au 表面鍍金 Golden Flash
2.2. FRONT SHELL:
2.2.1. 鍍金:
NI 30U MIN. PLATED OVER ALL.
鍍鍍底 30U MIN.
3. MECHANICAL PERFORMANCE,
3-1. INSERTION FORCE: 0.5~2.0kgf.
3-1.1. 插入力: 0.5~2.0kgf.
3-2. REMOVAL FORCE: 0.6kgf~2.0kgf.
3-2.1. 拔出力: 0.6kgf~2.0kgf.
3-3. DURABILITY: 10000 CYCLES.
3-3.1. 插拔壽命: 10000 次.
4. ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING: 48V DC/AC
4-1.1. 額定電壓: 48V DC/AC
4-2. CURRENT RATING: 5A
4-2.1. 額定電流: 5.0A
4-3. ILCR: 50mΩ/PIN MAX.
4-3.1. 接觸阻抗: 50mΩ/PIN MAX
4-4. INSULATION RESISTANCE: 100MΩ MIN
4-4.1. 絕緣阻值: 100MΩ MIN
4-5. DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
4-5.1. 耐電壓: AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
5.1. 環境特性:
5.1.1. OPERATING TEMPERATURE: -25°C~+85°C.
5.1.2. 工作溫度: -25°C~+85°C.

PART NO.: 8001F-FS16017-E

SERIE: TYPE C

Receptacle

Variable

serial number

产品图

PRODUCT CHART DWG

公差一览表

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED	单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X. ±0.30	X'. ±5°	MM	8001F-FS16017-E
.XX ±0.25	.X'. ±2°	比例 SCALE	产品名称 PRODUCT NO.
.XXX ±0.15	.XXX'. ±0.5°	日期 DATE	角法 VIEW
		2009/10/20	审核 CHKD
		核准 APPD	版本 VER
			A0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd