
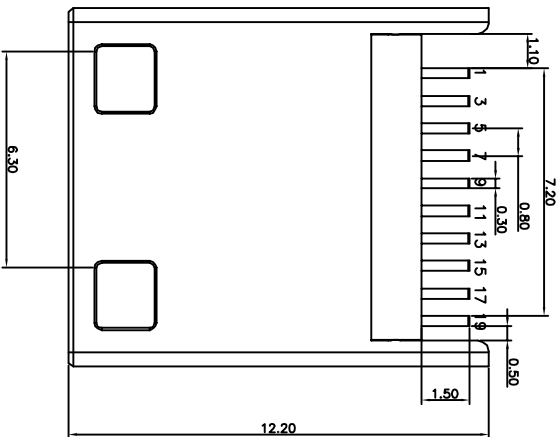
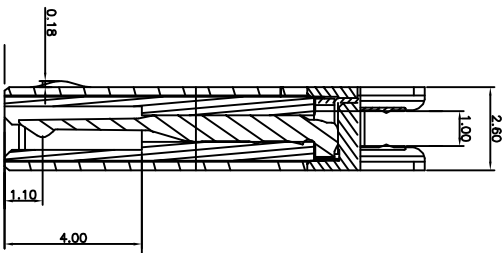



Rohs 客户图

目錄 MAPX	40	变更内容 MODIFICATION	19-02-20	日期 DATE
		NEW		

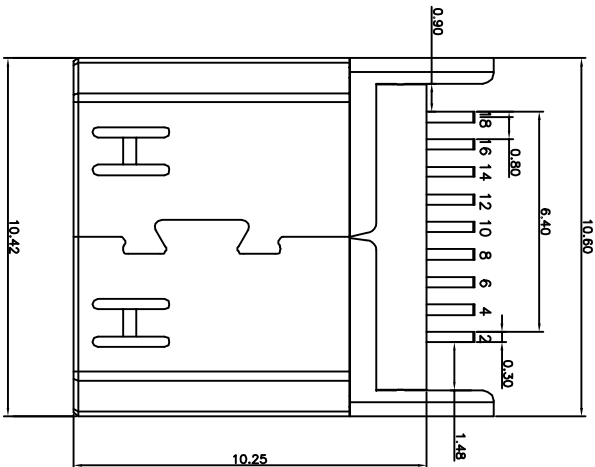

NOTE:

1. Electrical
 - 1.1 Rated Voltage:40V AC/DC maximum
 - 1.2 Rated Current:0.5A maximum
 - 1.3 Dielectric strength:500V AC/1 minute leakage current 10mA Max.
 - 1.4 Insulation Resistance:≥150V DC 10MΩ MIN.
 - 1.5 Contact Resistance:30mΩ Maximum
2. Mechanical
 - 2.1 Insertion Force Max:44.1N maximum
 - 2.2 Withdrawing Force:7N minimum, 25N maximum
 - 2.3 Durability: 5000 cycles at 100±50 cycles per hour.
3. Ambient Temperature:-25° C to +85° C
4. MATERIAL:
 - 4.1 HOUSING:LCP, UL 94V-0, COLOR:BLACK;
 - 4.2 CONTACT:G5191R-EH,T=0.12mm;
 - 4.3 SHELL:C2680-H OR SPCC T=0.25mm;
5. FINISH:
 - 5.1 CONTACT: THE BOTTOM OF THE NICKEL 50~1000", GOLD PLATING ON SURFACE 1U" AND Sn80~2000", GOLD PLATING ON SURFACE 0.3-0.5U"
 - 5.2 SHELL: THE BOTTOM OF THE COPPER AND NI GOLD PLATING ON SURFACE 0.3-0.5U"

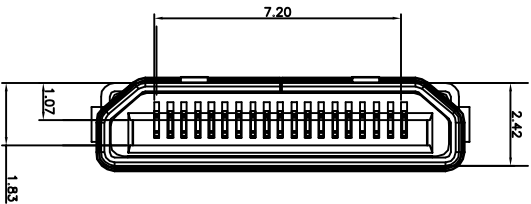

PART NO.: 8006M-C000001-X

SERISE: HDMI

Plug

C TYPE

Variable

serial number

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	MM	制图	王冠	产品料号	8006M-C000001-X
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING	Wangguian	产品名称	
X ±0.30	X' ±5°	比例	1:1	审核	雷永健	雷永健
X ±0.25	X' ±2°	SCALE		CHKD	Leiyongjian	PRODUCT NO.
.XX ±0.20	.XX' ±1°	日期	2009/10/20	核准	雷永健	联系方式
.XXX ±0.15	.XXX' ±0.5°	DATE		Appd	Leiyongjian	Mailbox/web
						mailbox: sale1@xfelcom.com
						www.xfelcom.com

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd