
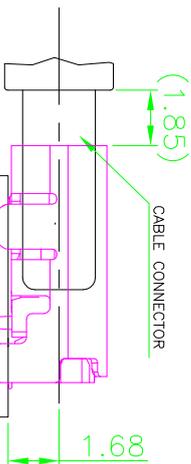
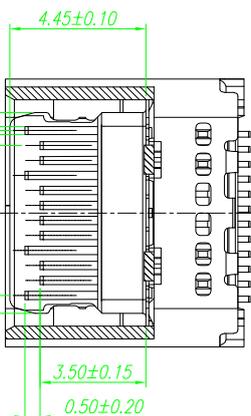
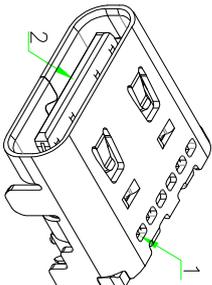
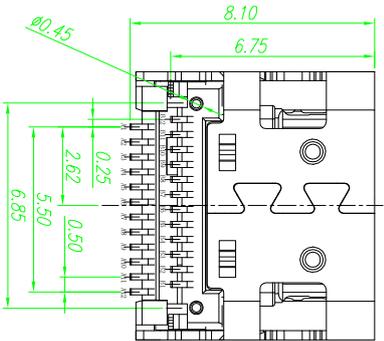
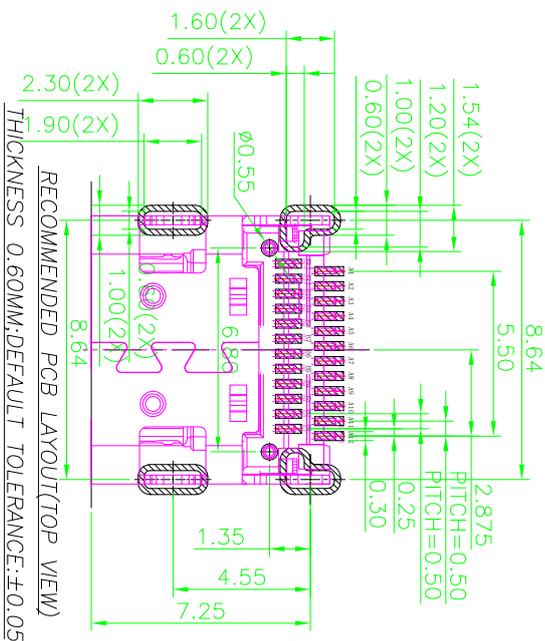
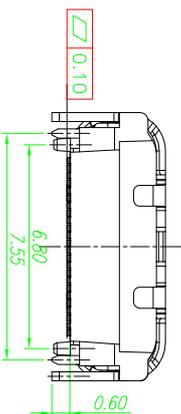
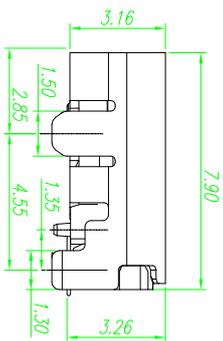
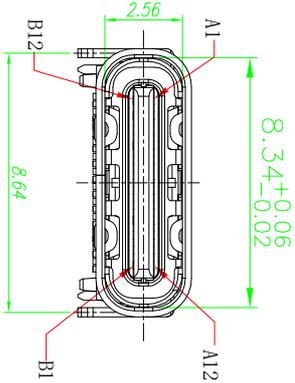


ROHS 客户图

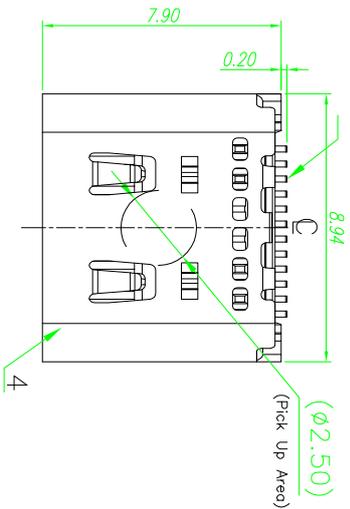

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
40	NEW	24-07-17

- SPECIFICATION:
- 1.ELECTRICAL CHARACTERISTICS:
- 1.1 CURRENT RATING: 5 A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC rms
 - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
- 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N,AFTER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
- 3.THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

PIN ASSIGNMENT			
Pin. No.	Signal Name	Pin. No.	Signal Name
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D-	B7	D-
A7	D+	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

PART NO: 8001F-2400058 -B

SERISE: TYPE C
Receptacle
serial number
Variable

Item	Description	QTY.	Material	Finish
4	Shielding plate	1	SUS 301	Ni underplating, overall, Gold Flash plating on the solder tail.
3	Contact	24	C18400	Ni underplating overall, Au plating on the contact area, Gold Flash plating on the solder tail.
2	IM	1	UL94V-0, Black/White	
1	Shell	1	SUS 304	Ni plating overall

产品图

PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE







公差	单位	比例
±0.30	X'	±5'
±0.25	X'	±2'
±0.20	XX'	±1'
±0.15	XXX'	±0.5'

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	比例	日期	制图	审核	批准	产品料号	产品名称	联系方式	联系邮箱
MM	1:1	2009/10/20	王冠	雷永健	雷永健	8001F-2400058-B	TYPE C 24P母座板上双插 1~7, 9 无阻片 带弹片	联系邮箱: sale@xfli.com	mailbox: sale@xfli.com
UNITS	SCALE	DATE	DRAWING	CHKD	APPRD	PRODUCT PART NO.	PRODUCT NAME	CONTACT NO.	MAILBOX
XXX	±0.15	XXX'	XXX'	±0.5'	XXX'	XXX'	XXX'	XXX'	XXX'

ROHS 客户图

目録 MAPX A0	设计内容 MODIFICATION NEW	日期 DATE 24-07-17
------------------	-----------------------------	------------------------

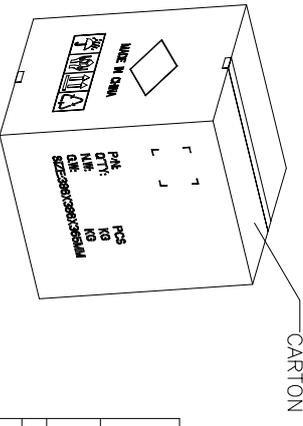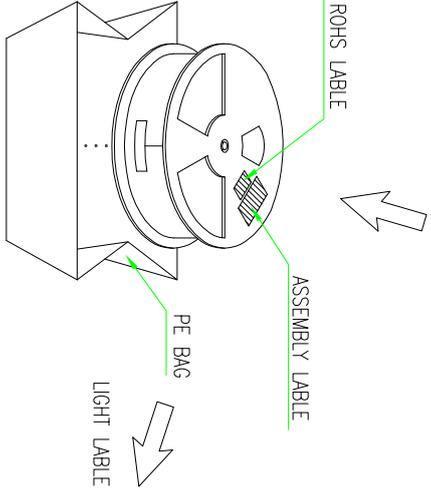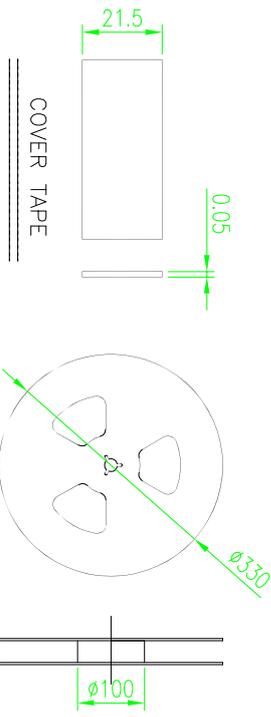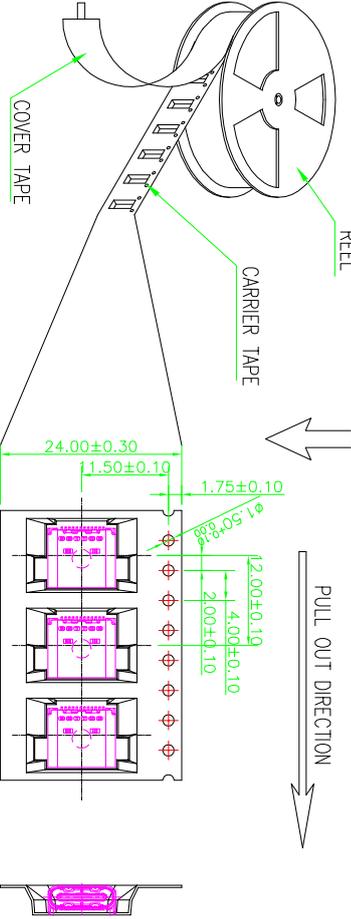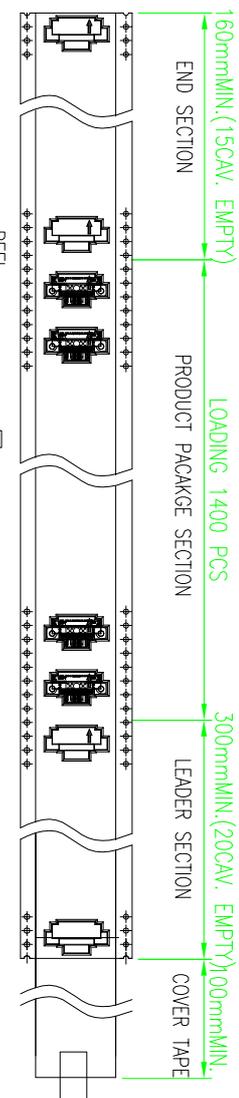

- NOTES: 2:
1. MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 2. DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
 3. QUANTITY:
 - 3.1 PRIMARY PACKING: 1400 PCS/REEL
 - 3.2 SECONDARY PACKING: 12 REELS/CARTON(16800 PCS/CARTON)
 4. PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165°~180°

产品图

PRODUCT CHAIR DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X	±0.30
XX	±0.20
XXX	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHD	批准 APD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	联系方式 MAILBOX/WEB
X	±0.30	1:1	2009/10/20	王冠 Wangguan	雷永健 Lei Yongjian	雷永健 Lei Yongjian	8001F-2400058-B	TYPE C 24P母座板上双贴 L=7.9 无阻片 带测试片	mailto:sale@xfll.com www.xfll.com.com