

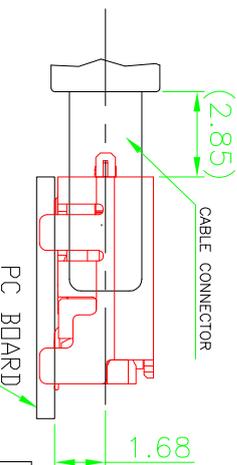
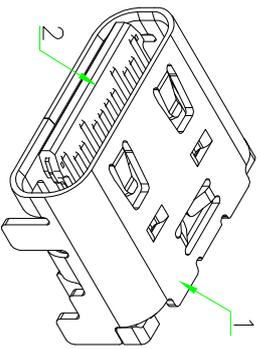
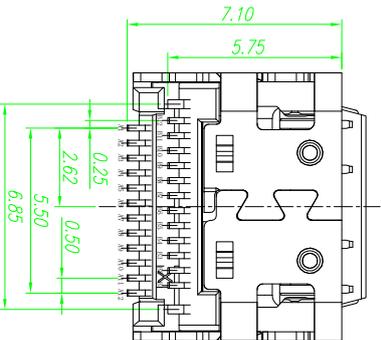
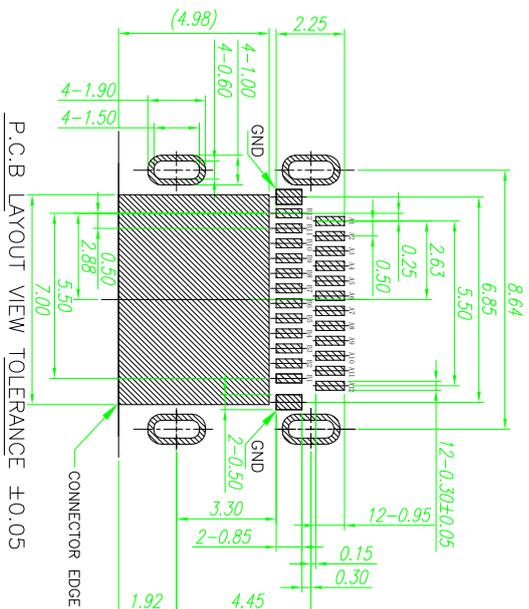
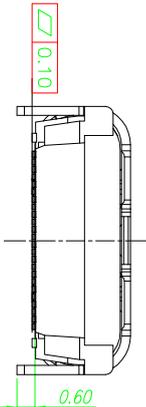
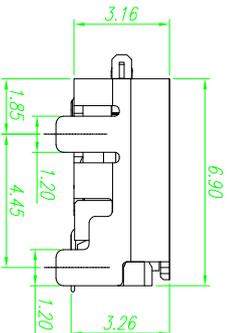
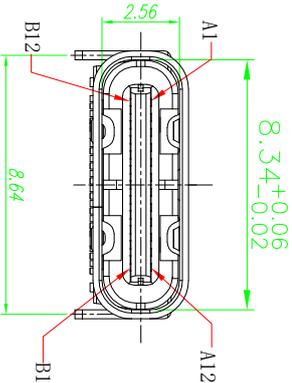


# ROHS 客户图

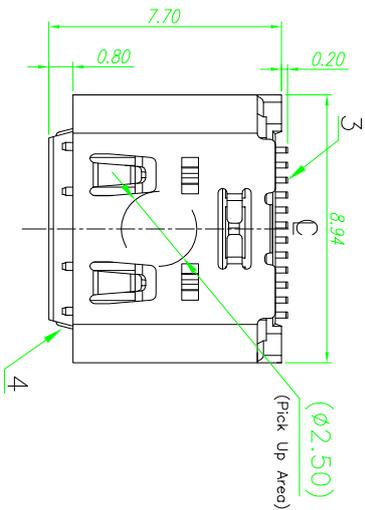

RECESSED MOUNTING CONFIGURATION

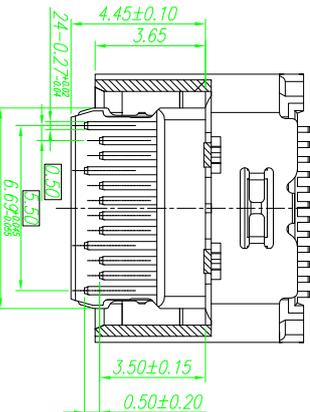

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 24-07-17
------------------	-----------------------------	------------------------

- SPECIFICATION:
1. ELECTRICAL CHARACTERISTICS:
- 1.1 CURRENT RATING: 5 A
  - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
  - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
  - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
2. MECHANICAL CHARACTERISTICS
- 2.1 INSERTION FORCE: 5~20N
  - 2.2 EXTRACTION FORCE: Initial:8~20N, AFTER TEST 6~20N
  - 2.3 DURABILITY: 10,000CYCLES
3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD, AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

PIN ASSIGNMENT			
Pin. No.	Signal Name	Pin. No.	Signal Name
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	D-	B7	D-
A7	D+	B6	D+
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

PART NO: 8001F-2400058 -C

SERISE: TYPE C  
Receptacle  
serial number  
Variabler

Item	Description	QTY.	Material	Finish
4	Shielding plate	1	SUS 301	Ni underplating, overall, Gold Flash plating on the solder tail.
3	Contact	24	C18400	Ni underplating overall, Au plating on the contact area, Gold Flash plating on the solder tail.
2	IM	1	LCP	UL94V-0, Black/White
1	Shell	1	SUS 304	Ni plating overall

## 产品图

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表		公差一览表	
TOLERANCE UNLESS OTHERWISE	UNIT	TOLERANCE UNLESS OTHERWISE	UNIT
X	±0.30	X'	±5'
X	±0.25	X'	±2'
XX	±0.20	XX'	±1'
XXX	±0.15	XXX'	±0.5'

制图	王冠	产品料号	8001F-2400058-C
审核	雷永健	产品名称	
日期	2009/10/20	联系方式	mailto:salel@xfll.com
DATE	2009/10/20	联系方	www.xfll.com

