

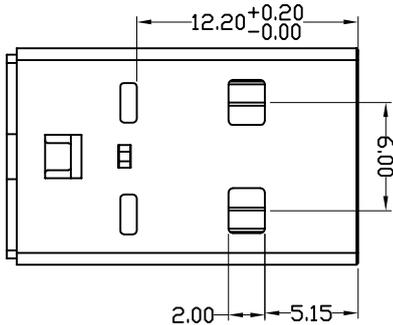

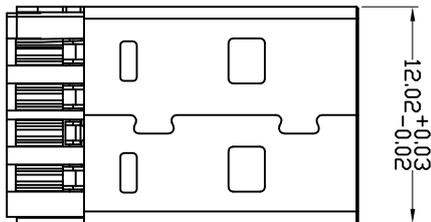
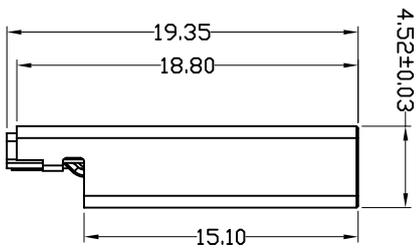



1
2
3
4
5
6
7
8
9
10

ROHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



NOTE:

- 1. MATERIAL
- 1.1. HOUSING: PBT:UL94V-0
- 1.2. CONTACT: H65
- 1.3. FRONT SHELL: SPCC T=0.30
- 2. FINISH:
- 2.1 CONTACT:
GOLD PLATING(1u") ON CONTACT AREA.
80u" MIN TIN PLATING ON SOLDER TAIL AREA,
50u" MIN. NICKEL UNDERPLATING OVERALL,
- 2.2 The shell electroplating requirements:
 - 1: the underlying copper bottom at least 80 u"
 - 2: the shell is gilded
 - 3: 48 hours salt spray
- 3. MARKED DIMENSIONS NEED BE MEASURED IN FAL.
- 4.1 ELECTRICAL:
VOLTAGE RATING:30VAC RMS;
CURRENT RATING: 1 AMP MIN(Can be resistant to current 2A,
maximum resistance to current value is 3A)
- 4.2 MECHANICAL:
CONTACT RETENTION FORCE:5N MIN
MATING FORCE:8-25N
UNMATING FORCE:10-25N
OPERATING LIFE:10000CYCKES

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS		比例 SCALE		日期 DATE	
X	±0.30	X'	±5'	X	1:1	2009/10/20	核准
XX	±0.25	X''	±2'	CHD	审核		雷永健
.XXX	±0.15	XXX'	±0.5'	APPD	核准		雷永健

产品料号 PRODUCT PART NO.	00302-U2AM004-A
产品名称 PRODUCT NO.	USB A公短体一体式 I=19.35无接地
角法 VIEW	
版本 VER	A0