
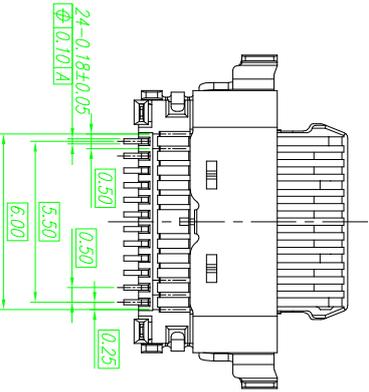
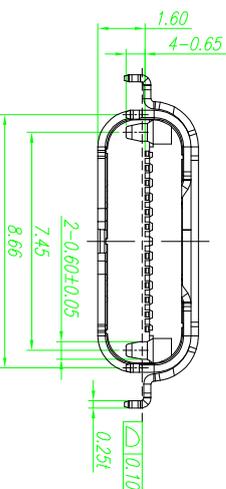

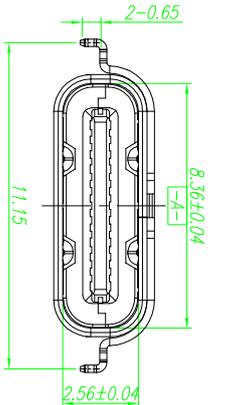



# ROHS 客户图

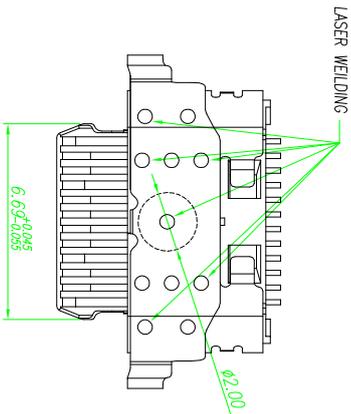

PIN ASSIGNMENT	
A1	A2
A3	A4
A5	A6
A7	A8
A9	A10
A11	A12
GN0	GN0
B12	B11
B10	B9
B8	B7
B6	B5
B4	B3
B2	B1

## 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	公差
X	±0.30
.X	±0.25
.XX	±0.30
.XXX	±0.15

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED
5	OUT_SHELL	1 PCS	STAINLESS STEEL	Ni Plated
4	MID PLATED	1 SET	STAINLESS STEEL	Ni Plated
3	CONTACT 1&2	1 SET	COPPER ALLOY	Au & Ni Plated
2	IM HOUSING	1 PCS	H.T.PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated

3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

2.2 EXTRACTION FORCE: Initial:8~20N, AFTER TEST 6~20N

2.3 DURABILITY:10,000CYCLES

### 2.MECHANICAL CHARACTERISTICS

2.1 INSERTION FORCE: 5~20N

1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s

1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.


1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C

1.1 CURRENT RATING: 5 A

### 1.ELECTRICAL CHARACTERISTICS:

SPECIFICATION:

P.C.B LAYOUT VIEW TOLERANCE ±0.05

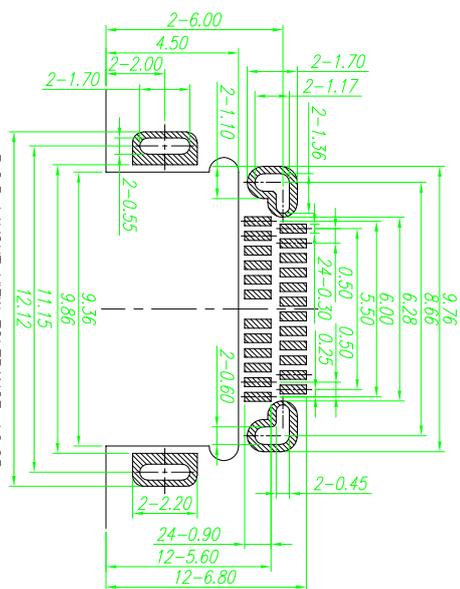

目錄  
MAPX

A0

變更內容  
MODIFICATION



NEW

日期  
DATE

09-10-20


# RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

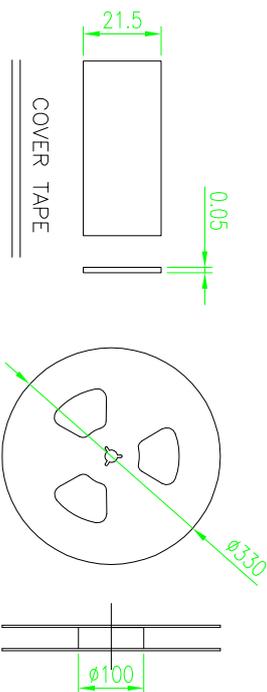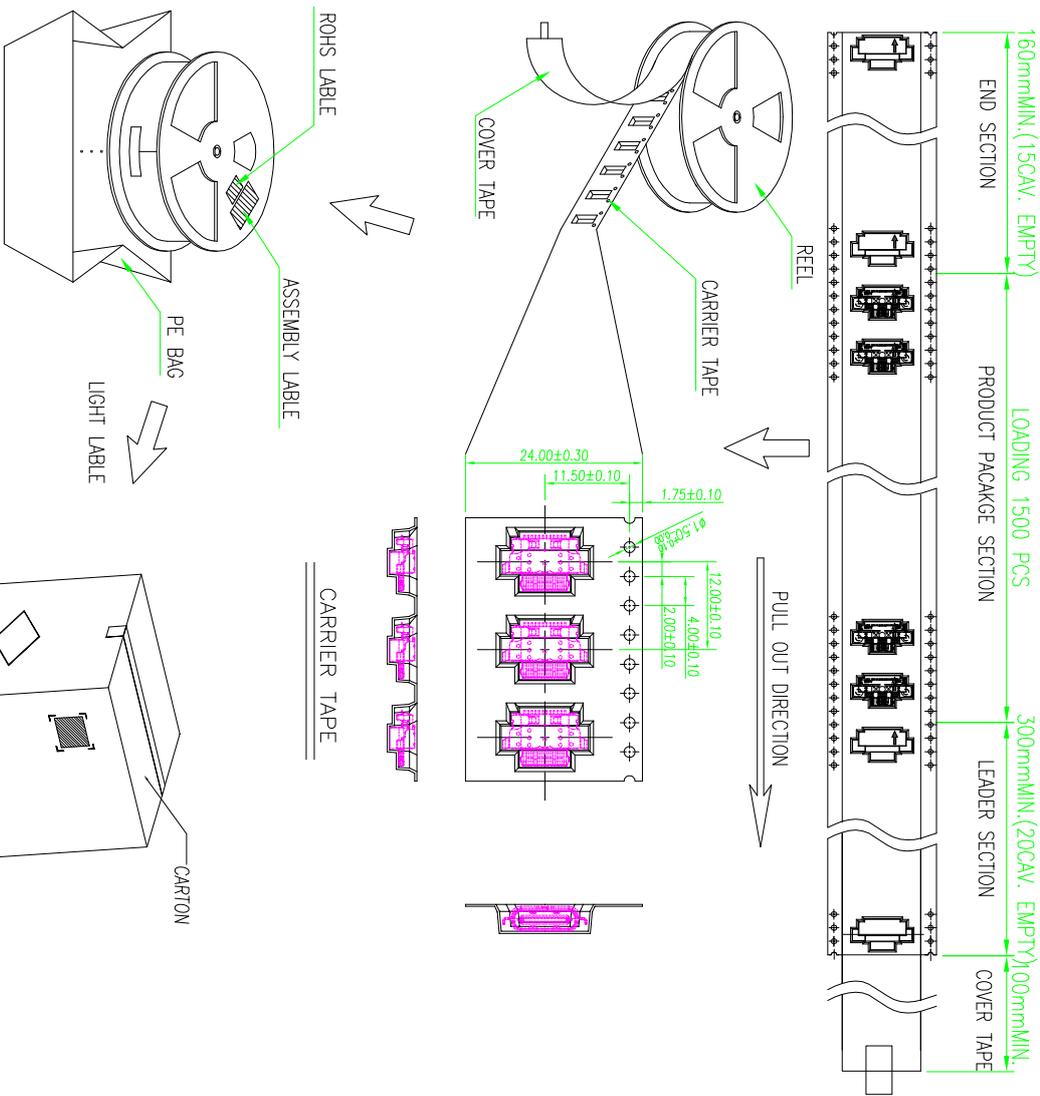

- NOTES 2:
- MATERIAL:
    - REEL AND AXLE: PS,BLUE
    - CARRIER TAPE: PET, LUCID
    - COVER TAPE: PS,TRANSPARENT
    - SHIPPING CARTON: CORRUGATED FIBER

- DIMENSION:
  - REEL: W=24.5,  $\phi$ A=330
  - CARRIER TAPE: T=0.30 W=24.0
  - COVER TAPE: T=0.05 W=21.5
  - SHIPPING CARTON: L=335mm, W=335mm, H=365mm
- QUANTITY :
  - PRIMARY PACKING: 1500 PCS/REEL
  - SECONDARY PACKING: 12 REELS/CARTON(18000 PCS/CARTON)
- PEELING RESISTANCE: 0.1~1.3N
- PEELING SPEED: 300mm/minutes
- PEELING ANGLE: 165°~180°

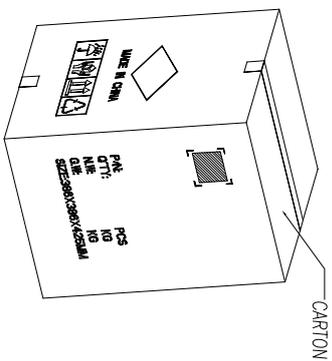

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM
X	±0.30	X	±5°
X	±0.25	X	±2°
XX	±0.30	XX	±1°
XXX	±0.15	XXX	±0.5°
比例 SCALE	1:1	制图 DRAWING	王冠 Wangguan
日期 DATE	2009/10/20	审核 CHECK	雷永健 Lei Yongjian
核准 APPR		核准 APPR	雷永健 Lei Yongjian
产品料号 PRODUCT PART NO.	80011F-2400065-X	产品名称 PRODUCT NO.	Type C 2400系列双壳贴片 封装:0.175 贴片封装:4
角法 VIEW		版本 VER	A0