
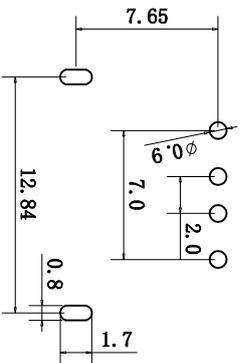
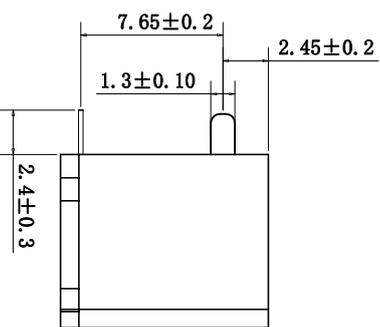
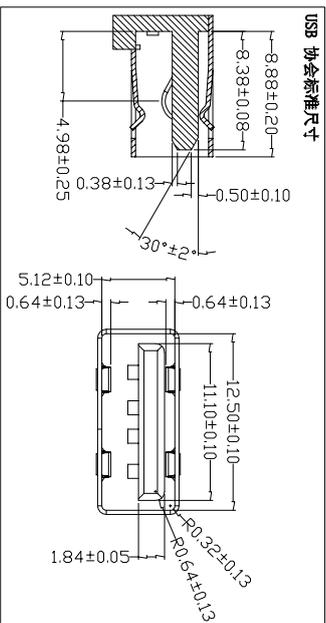
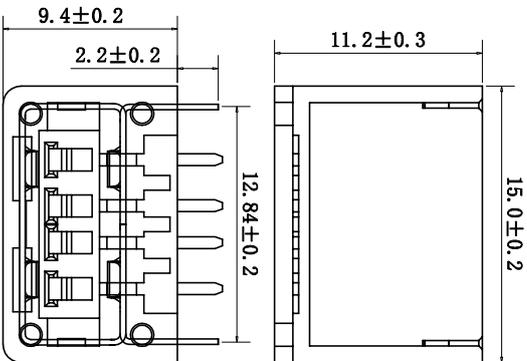


RoHS 客户图

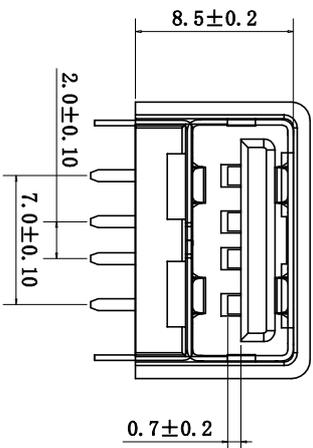

PCB LAYOUT

额定电流3A, 盐雾48H, 镀锡部分12H, 镀金部分24H

特性: Specifications:
电气: Electrical:

1. 接触阻抗: Contact Resistance: 30 milliohms MAX
2. 耐电压: Dielectric With Standing Voltage: 500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance: 1000 MEGA ohms MIN

机构: Mechanical:

1. 结合力: Mating Force: 35 N MAX 最大 35 N
2. 拔出力: Unmating Force: 8 N MIN 最小 8 N(6000次插拔后大于8N)

材料: Material:

1. 塑胶: PBT, 无卤.
2. 端子: Contact: C7025, T=0.25±0.03
3. 外壳: Shell: C5191, T=0.3±0.03

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area: Tin/Lead On Solder Talls. 接触点镀金30微米, 脚镀锡100微米
2. 外壳: Shell: Nickel Plating . 镀镍60微米

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差一览表	单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWTING	审核 CHECK	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 ANGLE	版本 VER
X	±0.30	X'	±5'		王冠	雷永健	20003-U2AF014-X	USB A前置脚 防水L=11.2 H=9.4		A0
X	±0.25	X'	±2'		雷永健	雷永健				
XX	±0.30	XX'	±1'		核准					
XXX	±0.15	XXX'	±0.5'		批准					

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

目録 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20