

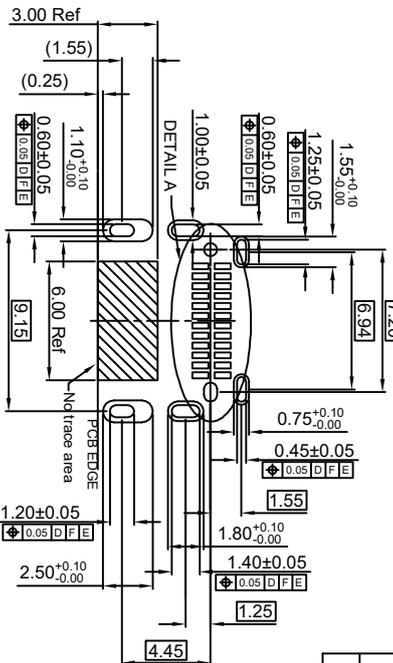


ROHS 客户图



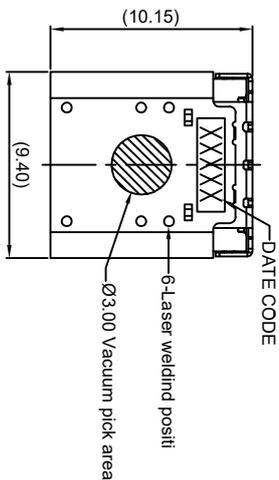


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

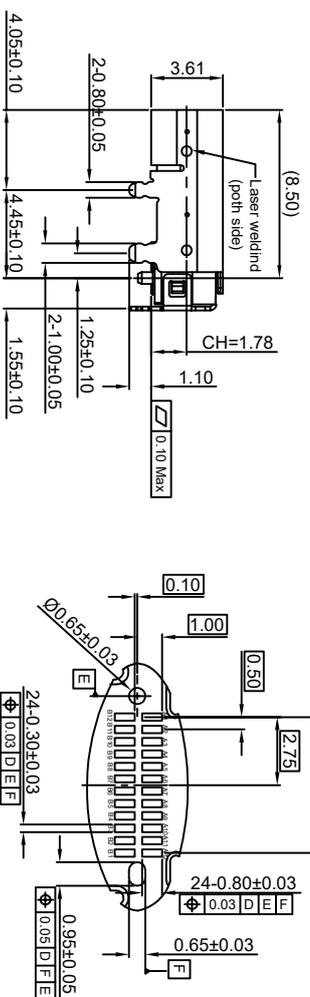

DETAIL A

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
First	Second	Second	First	Second	First						
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
First	Second	Second	First	Second	First						

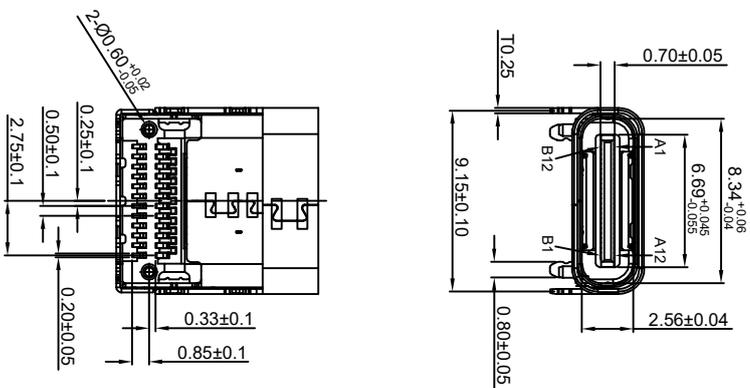

PART NO: 8001F-2400075 -X

SERISE: TYPE C
Receptacle
serial number
Variable

1	COVER SHELL	STAINLESS STEEL304	NI PLATED
2	SHELL	STAINLESS STEEL304	NI PLATED
3	EMI RING	STAINLESS STEEL304	...
4	GROUND PLATE	STAINLESS STEEL301	NI PLATED
5	HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK UL 94 V-0
6	TERMINALS	COPPER ALLOYC19400	AU PLATING ON CONTACT AREA
NO.	PARTS	MATERIAL	REMARKS

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	TOLERANCE UNLESS OTHERWISE
X	±0.30
X	±0.25
.XX	±0.20
.XXX	±0.15
X.	±5°
X'	±2°
XX'	±1°
XXX'	±0.5°

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位	MM
比例	1:1
日期	2009/10/20
制图	王冠
审核	雷永健
核准	雷永健
Appd	雷永健
产品料号	8001F-2400075-X
产品名称	TYPE C 24P母座板上双脚六脚
PRODUCT NO.	L=10.15 两排端子平齐
联系方式	mailto:sale@xf.com
网址	www.xf.com

目錄	修改內容	日期
MAPX	MODIFICATION	DATE
A0	NEW	19-10-20

USB-C Specification:

1. Current rated: 5A on vbus/1.25A on vconn/0.25A on other
2. Withstanding voltage: 100V AC/minute
3. Contact resistance: 40mΩ Max
4. Insulation resistance: 100MΩ Min
5. Operating temperature: -40°C ~ +85°C
6. Mating force: 5N~20N
7. Umating force: 8N~20N
8. Durability cycle: 10,000 cycles
9. Data transmission rate up to 5Gbps