
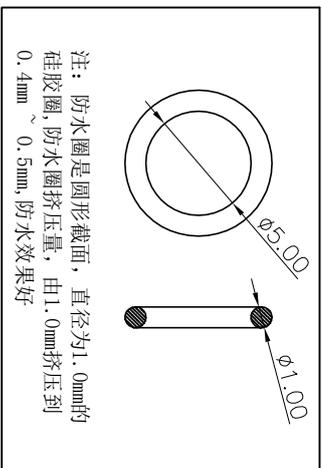
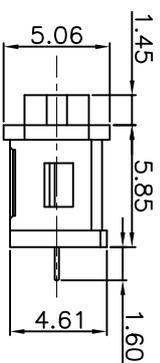
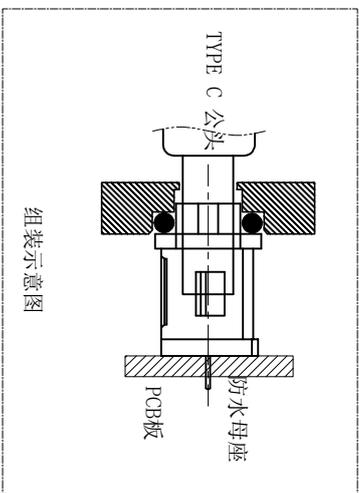
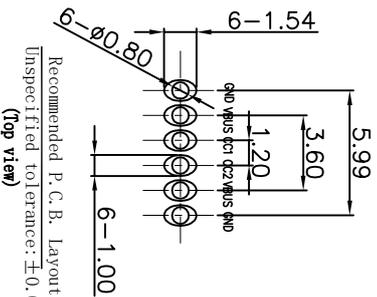
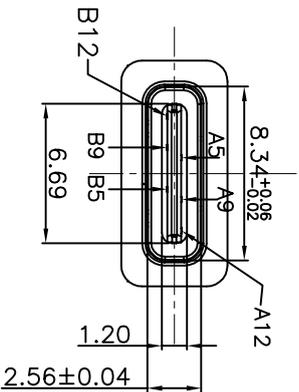


ROHS 客户图

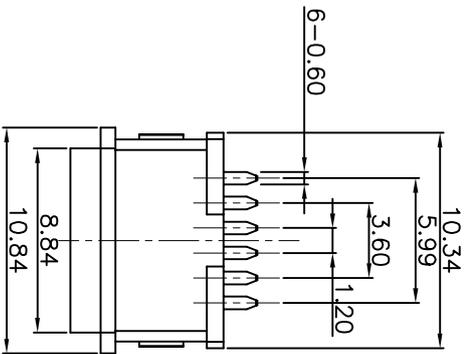

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTES:
SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIOHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY:5000 CYCLES

PART NO: **8001F-FS06030-X**

SERISE: TYPE C
Receptacle
serial number

Variable



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS304 Ni Plating T=0.25mm NI:40~120u";	
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	NI:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		制图 DRAWING		产品料号 PRODUCT PART NO.	
X	±0.30	X	±5°	王冠 Wangguan	8001F-FS06030-X
X	±0.25	X	±2°	雷永健 Lei Yongjian	产品名称 PRODUCT NO.
XX	±0.20	XX	±1°	雷永健 Lei Yongjian	联系方式 Contact/Info
XXX	±0.15	XXX	±0.5°	日期 DATE	2009/10/20