
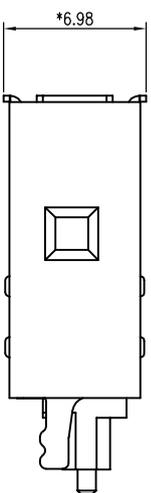


# RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

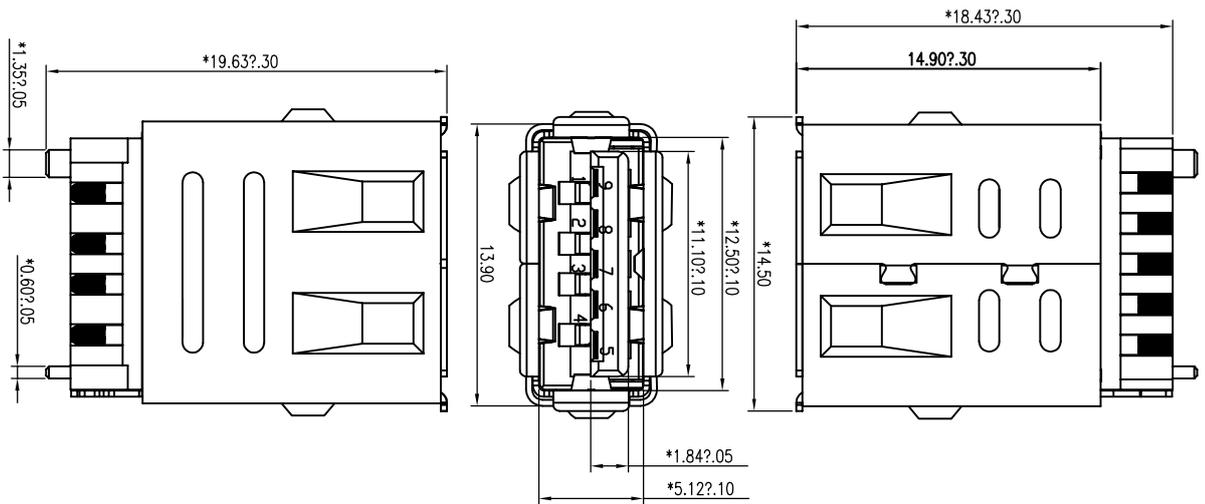

**NOTES:**  
**1.MECHANICAL:**  
 MATING:35NMAX.  
 WITHDRAWAL:10n MIN.  
 DURABILITY:1500 CYCLES MIN.  
**2.ELECTRICAL:**  
 CURRENT:100mA MAX  
 VOLTAGE: 20mV MAX  
 WITHSTANDING VOLTAGE:100V AC  
 CONTACT RESISTANCE:30 mMAX/50m MAX  
 INSULATION RESISTANCE:100M MIN

**PART NO: 8003F-0000062-B**

SERIE: USB3.0  
 Receptacle  
 serial number  
 Variables

USB 2.0 CONTACT PINS		USB 3.1 CONTACT PINS	
Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	VBUS	5	Stda_SSRX-
2	D-	6	Stda_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	Stda_SSTX-
	Shield	9	Stda_SSTX+

<b>产品图</b> PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		<b>深圳市鑫风雷电子有限公司</b> Shenzhen xinfenglei Electronic Co., Ltd	
X	±0.30	X'	±5°
X	±0.25	X''	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°
单位 UNITS	MM	制图 DRAWING	王冠
比例 SCALE	1:1	审核 CHKD	雷永健
日期 DATE	2009/10/20	核准 APPD	雷永健
产品料号 PRODUCT PART NO.	8003F-0000062-B	产品名称 PRODUCT NO.	USB3.0 AF 180度焊线+护套 加锡自动焊
角法 VIEW		版本 VER	A0