


1
2
3
4
5
6
7
8
9
10

RoHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

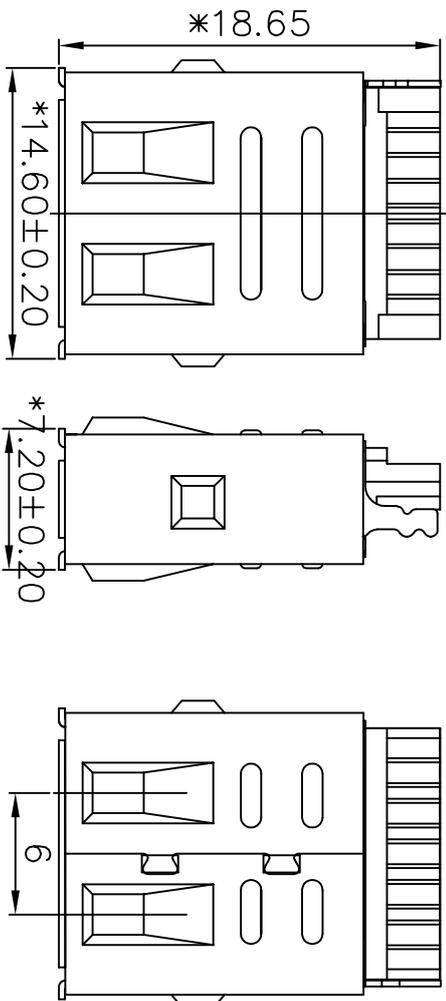


- NOTES:
1. MECHANICAL:
MATING: 35NMAX.
WITHDRAWAL: 10n MIN.
DURABILITY: 1500 CYCLES MIN.
2. ELECTRICAL:
CURRENT: 100mA MAX
VOLTAGE: 20mV MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 30 mMAX/50m MAX
INSULATION RESISTANCE: 100M MIN

PART NO: 8003F-0000062-A

SERISE: USB3.0

Receptacle serial number
Variable

USB 2.0 CONTACT PINS		USB 3.1 CONTACT PINS	
Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	VBUS	5	StDA_SSRX-
2	D-	6	StDA_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	StDA_SSTX-
	Shield	9	StDA_SSTX+

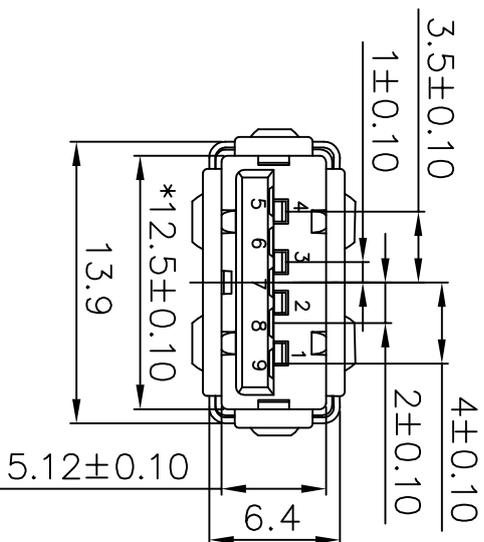

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

TOLERANCE	UNITS	SCALE
X	±0.30	X'
X	±0.25	X'
XX	±0.30	XX'
XXX	±0.15	XXX'

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	8003F-0000062-A
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	USB3.0 AF 180度焊线护套 手工焊
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	
				版本 VER	A0