
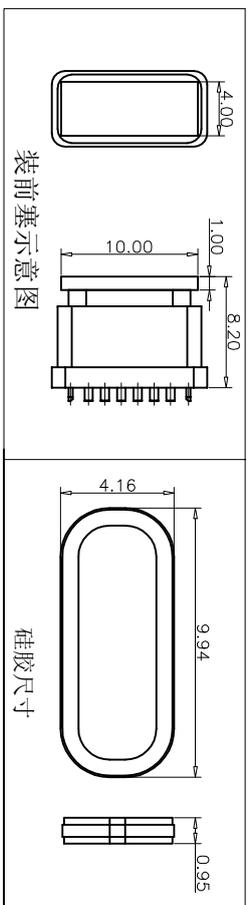
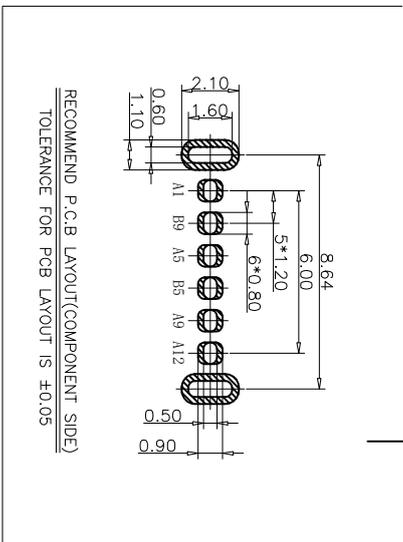
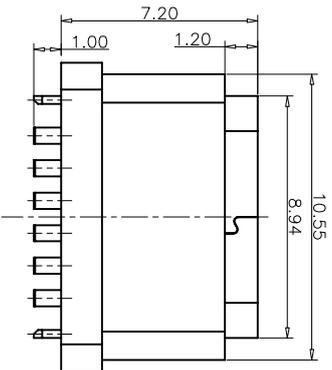
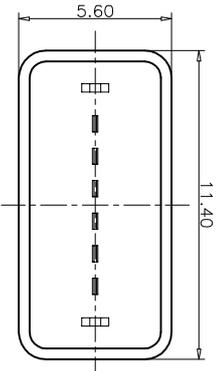

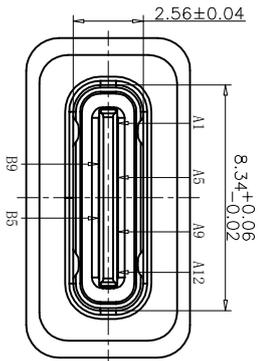


RoHS 客户图

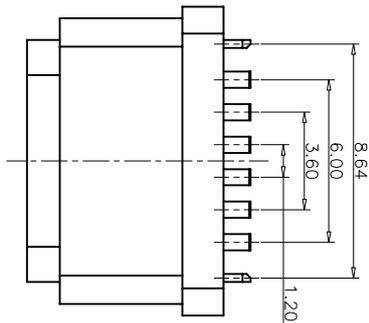

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A5	CC1	B5	CC2
A9	VBUS		
A12	GND		

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0 A
 - VOLTAGE RATING: 3.0 V
 - VBUS & GND PINS AND OTHER PINS: 40mQ/PIN MAX SHIELD: 50mQ/MAX
 - LCR MAX. CHANGE OF ALL PINS: 100m
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1MINUTE
 - INSERTION FORCE: 0.5-2.0kgf
 - UNMATING FORCE: 0.8-2.0kgf
 - DURABILITY: 10000 CYCLES
 - OPERATING TEMPERATURE: -35°C~+85°C
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 2 10-230°C
 - WATERPROOF: IP-X7.

PART NO: 8001F-FS06033-X

SERISE: TYPE C
Receptacle
serial number
Variable

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	6	COPPER STEEL,TIN/AU/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	IMD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	ZMD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

产品图

PRODUCT CHART.DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	公差
X	±0.30
X	±0.25
.XX	±0.20
.XXX	±0.15
X	±5°
X	±2°
.XX	±1°
.XXX	±0.5°

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	比例	日期
UNITS	MM	1:1	2009/10/20

制图	审核	核准
王冠	雷永健	雷永健
DRWING	CHKD	APPD

产品料号	产品名称	联系方式
8001F-FS06033-X	TYPE C 6P 防水母座180度立插 H=7.2 五金外覆1.20	mail:box:sale1@xf.com.com www_xf.com.com

目錄	修改內容	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20