

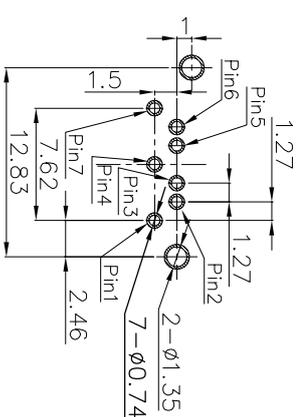

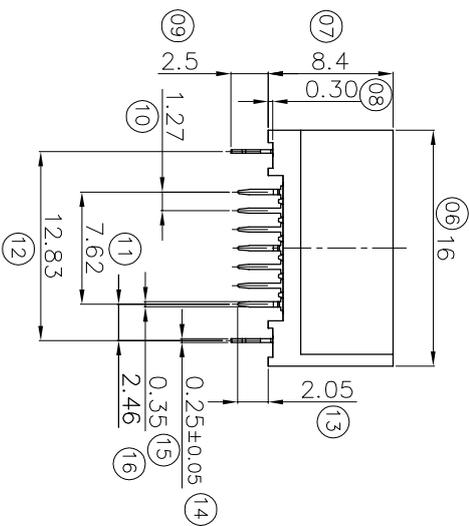
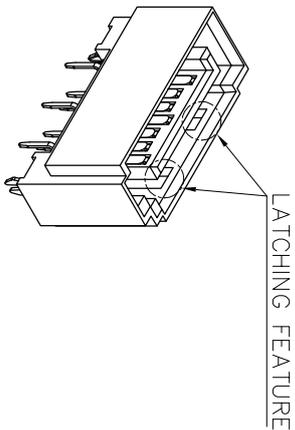


# RoHS 客户图

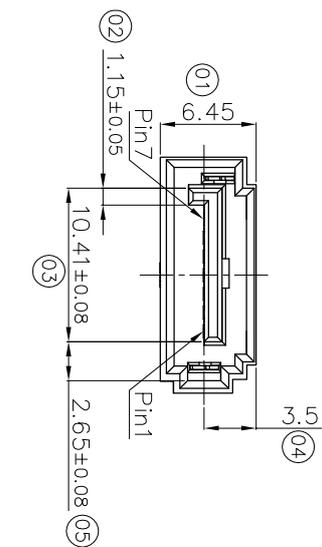

RECOMMENDED P.C.B. LAYOUT(TOP VIEW)  
THICKNESS:1.6mm; TOLERANCE ±0.05mm



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- MATERIAL SPECIFICATION,
  - HOUSING:PTI;
  - CONTACT:BRASS C2680;
  - HOOK:SPCC T=0.25;
- PLATING SPECIFICATION,
  - CONTACT:
    - UNDER PLATING:NI 50u" Min PLATED OVER ALL;
    - CONTACT AREA: SEE TABLE;
    - SOLDER TAIL: MATTE TIN 100u" Min PLATED,
  - HOOK: MATTE TIN 100u" Min PLATED OVER NI 50u" Min.
- MECHANICAL PERFORMANCE,
  - INSERTION FORCE:45N Max
  - REMOVAL FORCE:10N Min
  - DURABILITY:50 CYCLES
- ELECTRICAL PERFORMANCE,
  - CURRENT RATING:1.5A Max
  - INSULATION RESISTANCE:1000 MEGOHMS Min.
  - DIELECTRIC WITHSTAND VOLTAGE:500VRMS AT SEA LEVEL
- RoHS OR HF COMPLIANT

## 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	X	XX	XXX
±0.30	X	XX	XXX
±0.25	X	XX	XXX
±0.30	X	XX	XXX
±0.15	X	XX	XXX

## 深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	01018-SATAF01-X
比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NO.	SATA 7P 全包头 180度双排针扣脚 PH=1.5
日期 DATE	2009/10/20	核准 APPRO	雷永健	角法 VIEW	版本 VER
					A0