
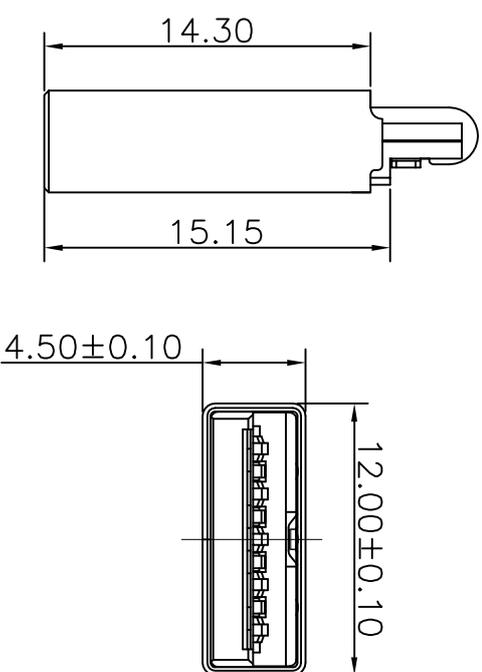
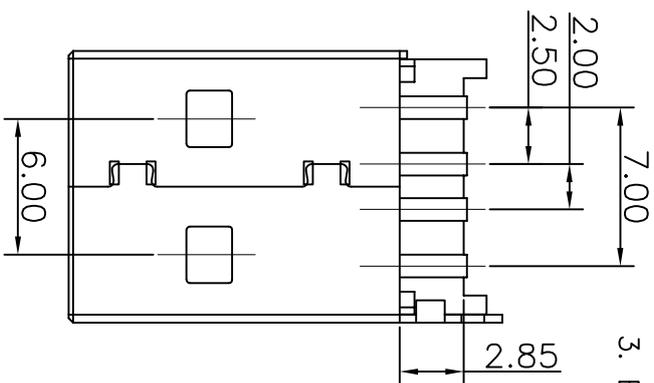
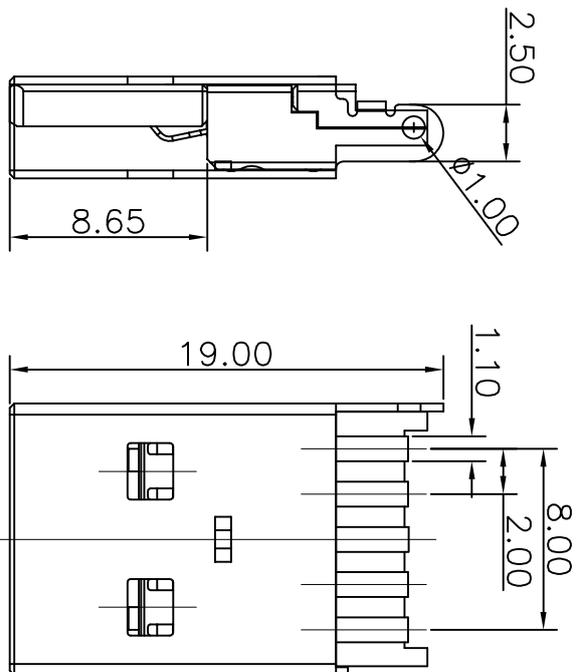


# RoHS 客户图

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	19-10-20



- NOTE:
1. ELECTRICAL:
- 1.1 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE : 100 VAC FOR 1 MINUTE.
  - 1.3 INSULATION RESISTANCE : 100 MEGAOHMS MIN.
2. MECHANICAL:
- 2.1 MATING FORCE: 3.57kg MAX.
  - UNMATING FORCE: 1.02kg MIN.
  - 2.2 DURABILITY : 1500 CYCLES
3. ENVIRONMENTAL:
- OPERARION TEMPERATURE : -55°C~+85°C

PART NO: 8003M-0000013-X

SERISE: USB3.0

PLUG

serial number

Variable

PRODUCT CHART DWG		单位		MM	
公差一览表		制图		王冠	
TOLERANCE UNLESS OTHERWISE		DRAWING		雷永健	
X	±0.30	X'	±5'	产品料号	8003M-0000013-X
X	±0.25	X''	±2'	产品名称	USB3.0 A公短体一体式线缆 L=19.0
XX	±0.20	XX'	±1'	联系方式	mailbox: sale1@xficom.com
XXX	±0.15	XXX'	±0.5'	日期	2009/10/20
		比例		1:1	
		日期		2009/10/20	
		核准		雷永健	
		APD		Lei Yong Jian	

## 产品图

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd