
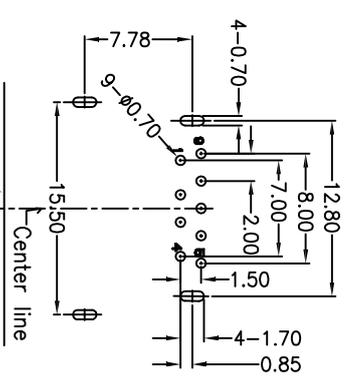
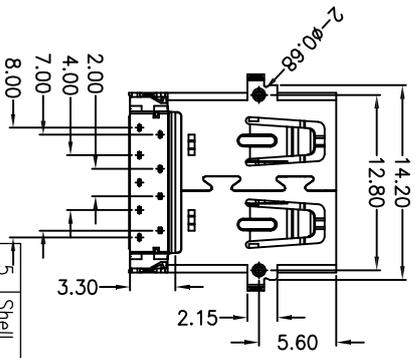

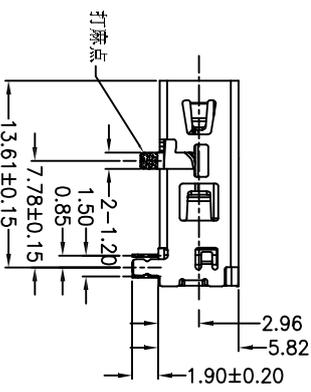

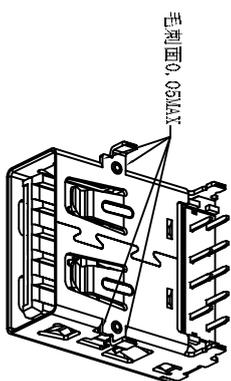



ROHS 客户图



目錄 MAPX	变更内容 MODIFICATION	日期 DATE
40	NEW	25-01-26

- MATERIALS (树脂) AND PLATING (电镀)
- SHELL MATERIAL: SUS304, T=0.30±0.02MM
 - PLATING: 50U" MIN. NICKEL PLATED OVERALL
 - TERMINALS MATERIAL: COPPER ALLOY, T=0.20MM, PLATING: 80U" MIN. MATTE TIN PLATED ON SOLDER TAIL; 50U" MIN. NICKEL UNDERPLATED OVERALL; FU GOLD PLATED ON CONTACT AREA
 - HOUSING MATERIAL: THERMOPLASTIC UL94V-0
- ELECTRICAL PERFORMANCE (电气性能)
- RATED VOLTAGE: 30V rms MAX.
 - RATED CURRENT: 1.8A FOR 1~4 PIN, 0.25A FOR 5~9 PIN
 - INSULATION RESISTANCE: 100 MΩ MIN., 100V DC, TEST TIME: 1 SEC., MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC, TEST TIME: 1 SEC., MIN.
 - CONTACT RESISTANCE: 30mΩ MAX. FOR 1~4 PIN, 50mΩ MAX. FOR 5~9 PIN
- ENVIRONMENTAL PERFORMANCE (环境性能)
- OPERATING TEMPERATURE: -25°C TO +85°C
 - STORAGE TEMPERATURE: -25°C TO +80°C
 - RELATIVE HUMIDITY (%): 20%~70%
 - STORAGE LIFE: 12 MONTHS MAX.
 - SALT SPRAY TEST: 24H
 - MECHANICAL PERFORMANCE (机械性能)
 - DURABILITY: 10000 CYCLE
 - MATING FORCE: 3.5N MAX.
 - AFTER DURABILITY TEST: 35N MAX.
 - UNMATING FORCE: 10N MIN.
 - AFTER DURABILITY TEST: 8N MIN.
 - THE PEAK OF TEMPERATURE ON SOLDERING: TH: 255±5°C, 5~10S

PART NO: 8003F-0000060-B

SERIE: USB3.0

Receptacle serial number Variabler

Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	VBUS	5	SIDA_SSRX-
2	D-	6	SIDA_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	SIDA_SSTX-
	Shield	9	SIDA_SSTX+

产品图

5	Shell	SUS 304	1	T=0.30, Nickel plated.
4	Cover	LCP	1	UL94V-0, Color: Blue
3	Housing		1	UL94V-0, Color: Blue
2	5pin Contact	C2680	5	Gold/Matte-tin
1	4pin Contact	C5191	4	Gold/Matte-tin

公差一览表

公差一览表	公差	公差	公差
TOLERANCE UNLESS OTHERWISE	±0.30	±0.25	±0.20
	X	XX	XXX
比例	1:1		
日期	2009/10/20		

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

制图 DRAWING	王冠 Wangguang	产品料号 PRODUCT PART NO.	8003F-0000060-B
审核 CHECK	雷永健 Leiyongjian	产品名称 PRODUCT NAME	USB3.0 AF 90度板上型四脚无壳 H=6.82 L=15.0
核准 APPROVE	雷永健 Leiyongjian	联系方式 CONTACT INFO	mailto:sale@xfll.com, www.xfll.com, com