
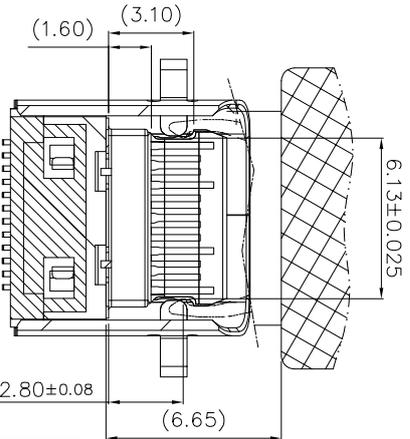
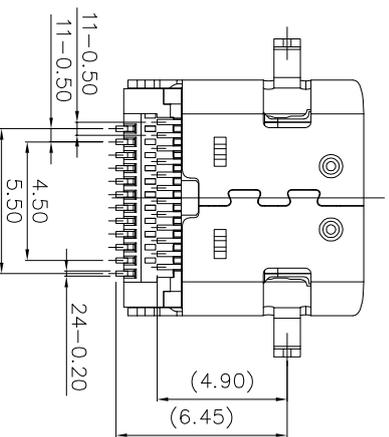
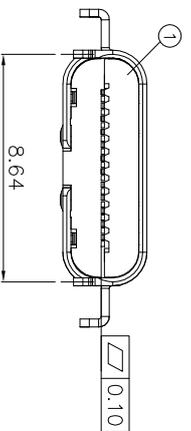
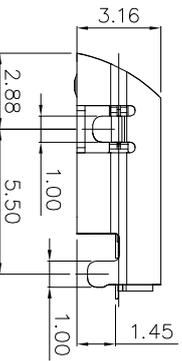
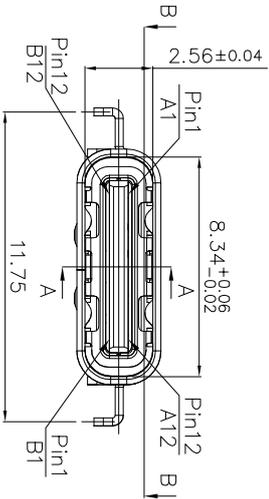
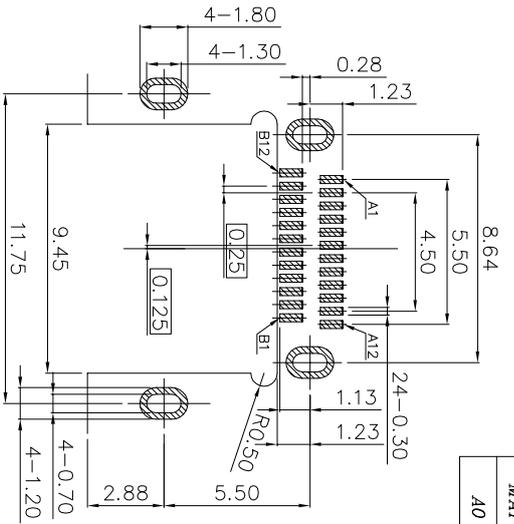



ROHS 客户图

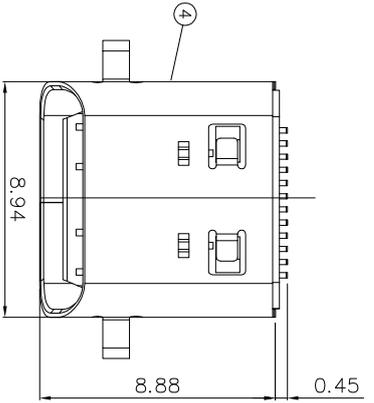

| | | |
|------------|----------------------|------------|
| 目錄 MAPX | 變更內容 MODIFICATION | 日期 DATE |
| A0 | NEW | 09-10-20 |

- NOTES:
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5N~20N.
 - REMOVAL FORCE: 5N~20N.
 - DURABILITY: 10000 CYCLES.
 - ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5.0A
 - LCR: VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX. SHIELD: 50mΩ/MAX.
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
 - ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -25°C~+85°C.

PART NO: 8001F-2400098-C

SERIE: TYPE C
 Receptacle
 serial number
 Variabler

PIN ASSIGNMENTS:

| PIN No. | A1 | A2 | A3 | A4 | A5 | A6 | A7 | A8 | A9 | A10 | A11 | A12 |
|-------------|-----|--------------|------|----|----|------|------|------|------|-----|-----|-----|
| SIGNAL NAME | GND | TX1+TX1+Vbus | CC1 | D+ | D- | SBU1 | Vbus | RX2- | RX2+ | GND | GND | GND |
| PIN No. | B12 | B11 | B10 | B9 | B8 | B7 | B6 | B5 | B4 | B3 | B2 | B1 |
| SIGNAL NAME | GND | RX1+RX1+Vbus | SUB2 | D- | D+ | CC2 | Vbus | TX2- | TX2+ | GND | GND | GND |

| | | | | |
|---|-------------------|-------|----------------------------------|-----------------------------|
| ③ | EMI PLATE | 1 PCS | SUS304 1/4H T=0.10 | |
| ⑤ | MID PLATE | 1 PCS | SUS 301 3/4H T=0.12 | |
| ④ | SHELL | 1 PCS | SUS 304-1/2H T=0.3 | 300" Min. NI OVER ALL |
| ③ | TERMINAL 2(12Pin) | 1SET | C7025 TM03 T=0.12 | Under Plating: Ni 30u" |
| ② | TERMINAL 1(12Pin) | 1SET | C7025 TM03 T=0.12 | Contact Plating: Au(See No) |
| ① | HOUSING | 1 PCS | HIGH TEMP. THERMOPLASTIC UL94V-0 | Soldering Plating: Au(C/F) |
| | PART NAME | QTY. | MATERIAL | REMARK |

产品图

深圳市鑫风雷电子有限公司
 Shenzhen xinfenglei Electronics Co., Ltd

| | | | | | | | |
|----------------------------|------|-------|------------|---------|-----------------|-----------------|----|
| 公差一览表 | | 单位 | | 比例 | | 日期 | |
| TOLERANCE UNLESS OTHERWISE | UNIT | SCALE | DATE | DRAWING | PRODUCT NO. | 角法 | 版本 |
| X ±0.30 | X' | 1:1 | 2009/10/20 | 王冠 | 8001F-2400098-C | ASME TYPE C 29P | A0 |
| X ±0.25 | X' | | | 雷永健 | | | |
| XX ±0.30 | XX' | | | 雷永健 | | | |
| XXX ±0.15 | XXX' | | | | | | |