

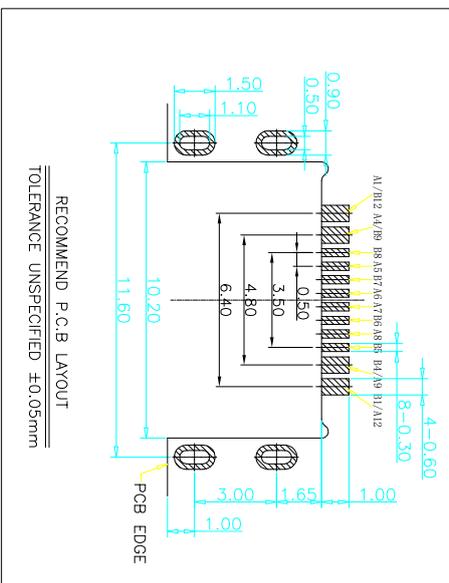
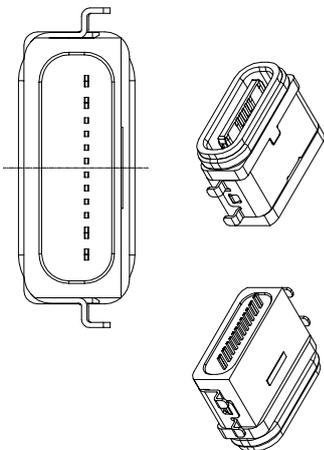



# ROHS 客户图

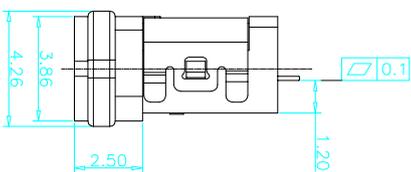

- NOTES:**
- SPECIFICATION:**
  - 1.CURRENT RATING: 3.0A
  - 2.VOLTAGE RATING: 30V
  - 3.BUS & GND PINS AND OTHER PINS: 40mN/PIN MAX
  - SHIELD: 50mN/MAX
  - LCR MAX CHANGE OF ALL PINS: 100m
  - 4.INSULATION RESISTANCE: 100MΩ/MIN
  - 5.DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1MINUTE
  - 6.INSERTION FORCE: 0.5-2.0kgf
  - 7.LUMINATING FORCE: 0.8-2.0kgf
  - 8.DURABILITY: 10000 CYCLES
  - 9.OPERATING TEMPERATURE: -35°C~+85°C
  - 10.THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 280°C
  - 11.WATERPROOF: IP-X7.

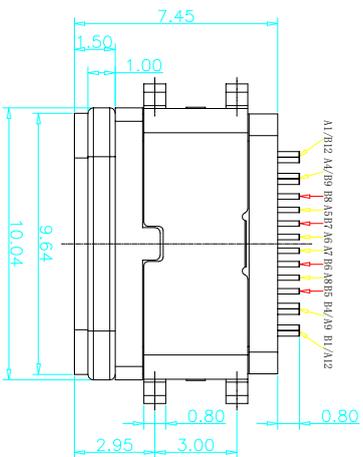

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SR02
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	QTY	Material
1	PLASTIC SHELL	1	PA UL94 V-0 BLACK
2	CONTACT	16	C7025,TIN80u"/Au5u"/Ni30u"/PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP UL94 V-0 BLACK
5	SHIELDING PLATE	1	SUS,INI PLATED
6	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

## 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE	X	XX	XXX
±0.30	X	XX	XXX
±0.25	X	XX	XXX
±0.20	X	XX	XXX
±0.15	X	XX	XXX

## 深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	审核 CHD	核准 APD	日期 DATE	比例 SCALE	产品料号 PRODUCT NO	产品名称 PRODUCT NAME	联系方式 CONTACT
X	±0.30	X	X	X	2009/10/20	1:1	00101-UCAR033-B		mailto:sale@xfll.com
XX	±0.20	XX	XX	XX					www.xfll.com
XXX	±0.15	XXX	XXX	XXX					