
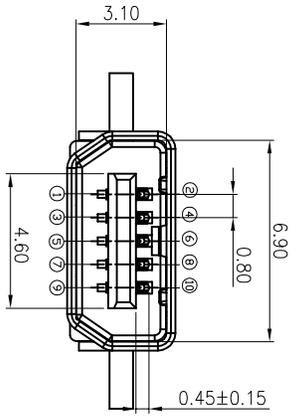
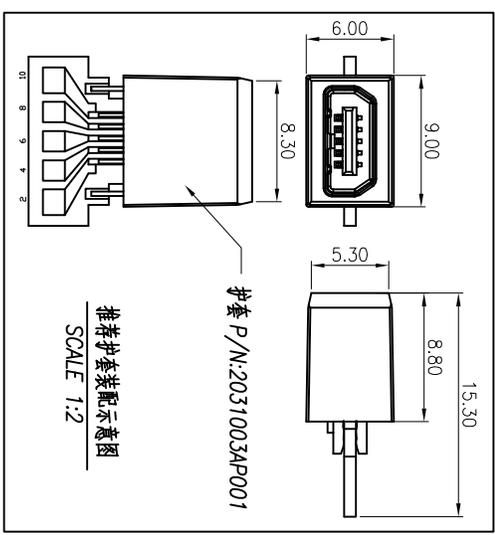
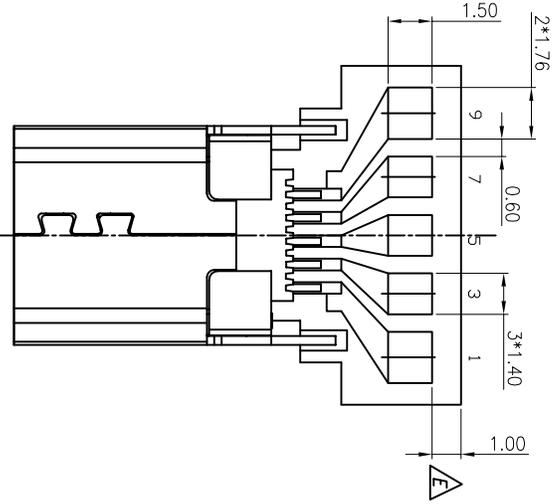


ROHS 客户图

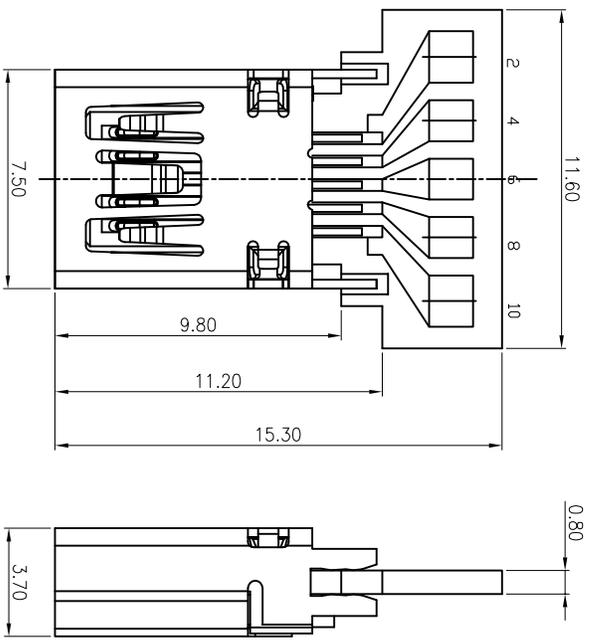

- NOTE:
- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 30V AC
 - CURRENT RATING: 2.0A
 - CONTACT RESISTANCE: 50 milliohms MAX.
 - INSULATION RESISTANCE: 100 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - MECHANICAL CHARACTERISTICS
 - Mating FORCE: 35N Max
 - Unmating FORCE: 7N Min(Initial)
 - DURABILITY: 10000CYCLES
 - SALT SPRAY: 48H
 - OPERATING TEMPERATURE: -40°C~85°C

| D | PCB | FR-4 | T-122 |
|---|---------------------|-----------|---|
| C | SHELL | SUS 304 | NI PLATING |
| B | CONTACT | 10 CS191 | Gold Finish On Contact Area Min. plated on Solder tail Min. over Nickel Finish. |
| A | HOUSING DESCRIPTION | 1 TOP E30 | BLACK PLATING & COLOR |

| 公差一览表 | | TOLERANCE UNLESS OTHERWISE SPECIFIED | |
|-------|-------|--------------------------------------|-------|
| X | ±0.30 | X' | ±5° |
| X | ±0.25 | X' | ±2° |
| .XX | ±0.30 | .XX' | ±1° |
| .XXX | ±0.15 | .XXX' | ±0.5° |

| 产品图 | | SHENZHEN XINFENGLEI ELECTRONIC CO., LTD | |
|------|-----------------|---|--------------------------------------|
| 单位 | MM | 制图 | 王冠 |
| 比例 | 1:1 | 审核 | 雷永健 |
| 日期 | 2009/10/20 | 核准 | 雷永健 |
| 产品料号 | 8030P-0000007-X | 产品名称 | MINI USB 10P母座夹板(带PCB不锈钢壳)0焊点 L=15.3 |
| 版本 | A0 | 角法 | 第三角法 |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION