

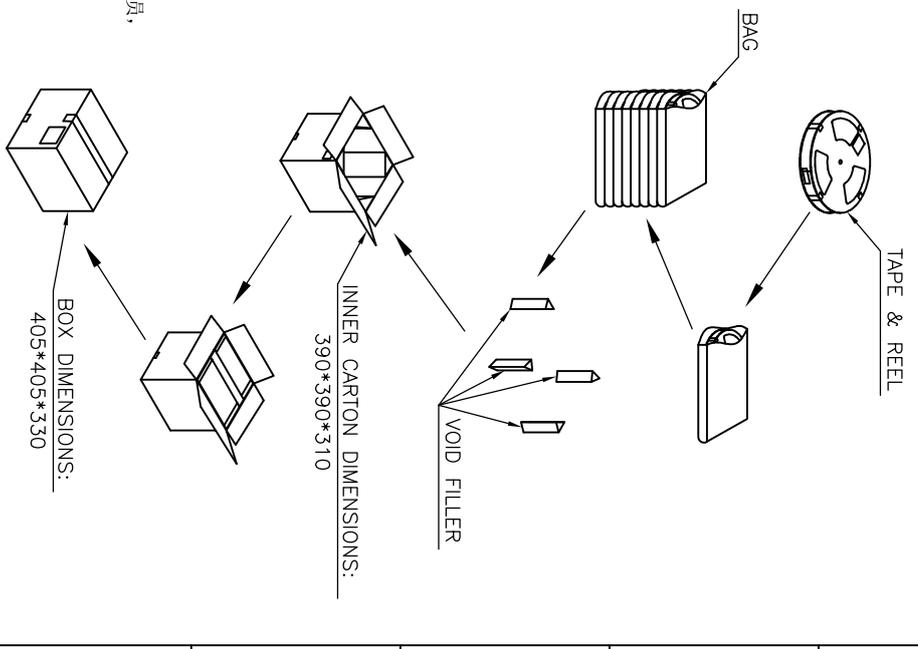


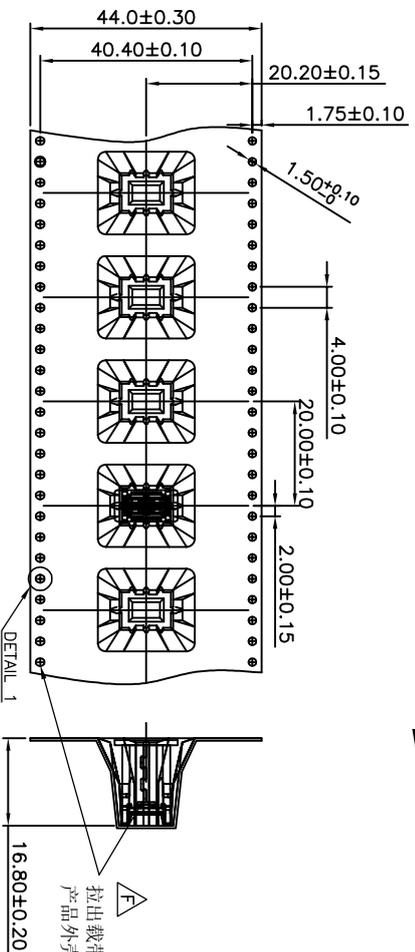


# RoHS 客户图

目錄 MAPX A0	設定內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

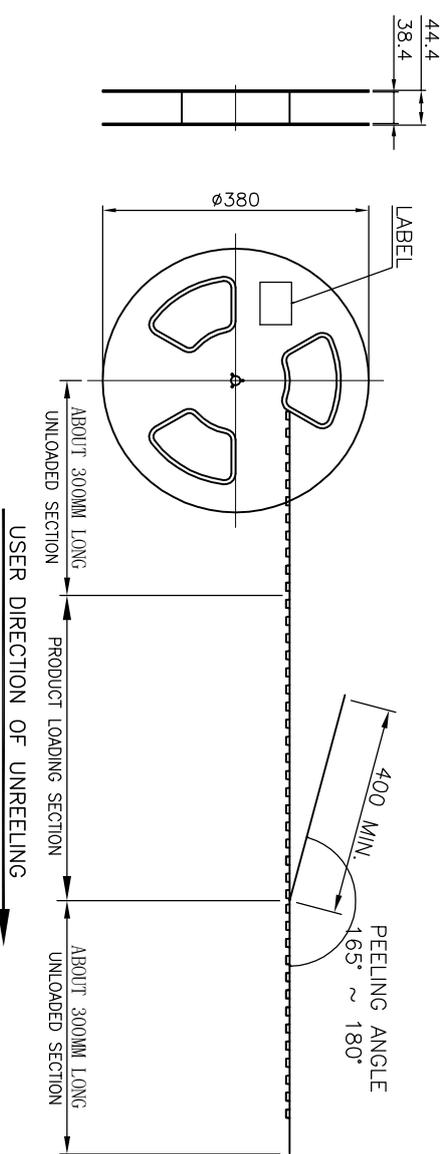

- NOTE:
1. MATERIAL:  
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.  
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.  
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.  
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
  2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
  3. PEELING SPEED: 300 mm/min.
  4. EACH BAG SHALL BE INCLUDED DESICCANT.



产品图

公差一览表  
TOLERANCE UNLESS OTHERWISE

公差	公差	公差	公差
X	±0.30	X'	±5'
X	±0.25	X''	±2'
.XX	±0.30	.XX'	±1'
.XXX	±0.15	.XXX'	±0.5'

## 深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	8001F-2400099-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 24P插立式SMT H=13.3 脚长1.4与1.8
日期 DATE	2009/10/20	批准 APPD	雷永健	角法 VIEW	

250	6	1500	---	---
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT