

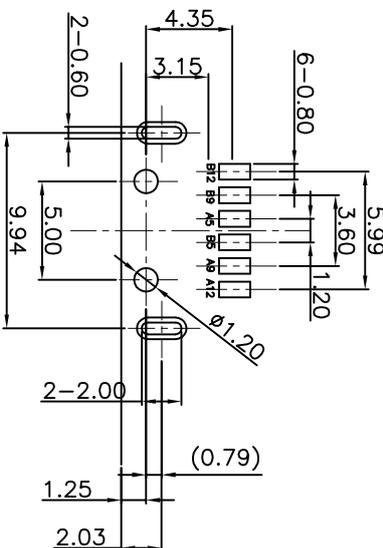
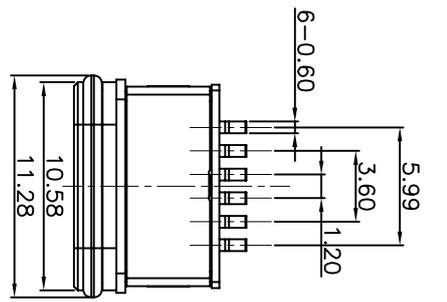
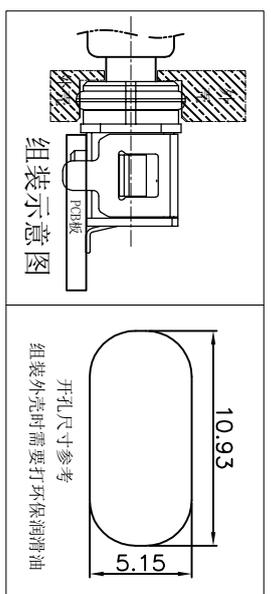



# RoHS 客户图

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

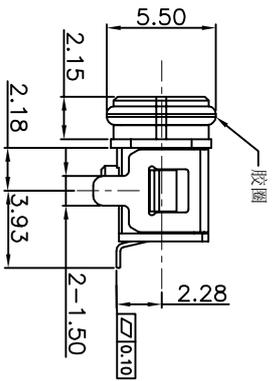

Recommended P.C.B. Layout  
Unspecified Tolerance: ±0.05  
(Top view)

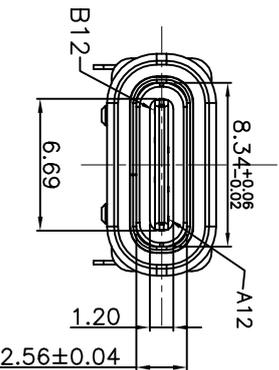


- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
  - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
  - TEMPERATURE RANGE: -30 °C ~ 85 °C
  - CONTACT RESISTANCE: 40 MILLIONHM MAX
  - INSULATION RESISTANCE: 100 MEGOHMS MIN.
  - INSERTION FORCE : 5N~20N
  - UNMATING FORCE: 6N~20N
  - DURABILITY:10,000 CYCLES
  - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7.

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40u"Min:
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40u"Min:
3	Housing2	1	PA10T(G:F30%)	
2	Contact	6	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40u"Min: Au:CONTACT AREA: OTHER AREA:G/P
1	Housing	1	PA10T (G:F30%)	

ITEM	PART NAME	Q'TY	FINISH	NOTE
------	-----------	------	--------	------

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME



## 产品图

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM
X	±0.30	X	±5°
X	±0.25	X	±2°
.XX	±0.30	.XX	±1°
.XXX	±0.15	.XXX	±0.5°