

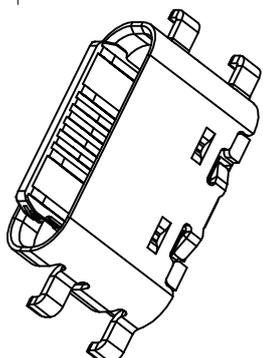
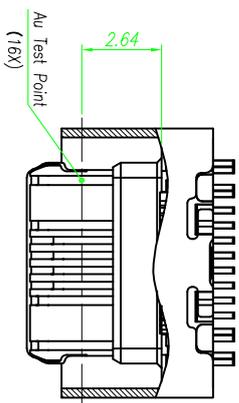
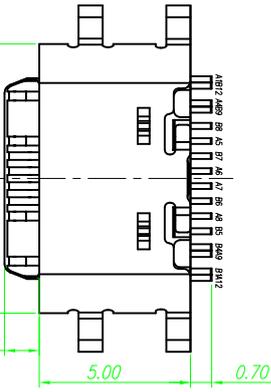
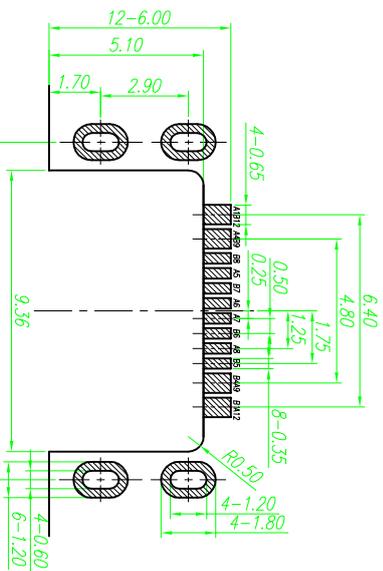
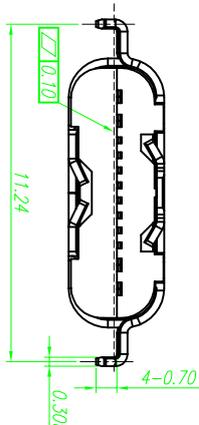


# ROHS 客户图

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

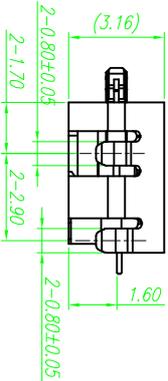


PIN ASSIGNMENT													
A1	X2	X3	A4	A5	A6	A7	A8	A9	X10	X11	A12	BLADE	SHELL
GND	X13	X14	VBUS	CC1	D+	D-	SBU1	VBUS	RX2	RX2	GND		
	RN1+	RN1-	VBUS	SEN2	D-	D+	CC2	VBUS	X2+	X2+	GND		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

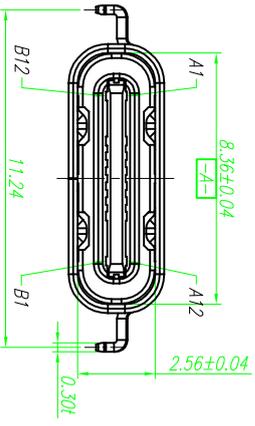

P.C.B LAYOUT VIEW TOLERANCE ±0.05

SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS:
  - 1.1 CURRENT RATING: 5A
  - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
  - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
  - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
2. MECHANICAL CHARACTERISTICS
  - 2.1 INSERTION FORCE: 5~20N
  - 2.2 EXTRACTION FORCE: Initial:8~20N, AFTER TEST 6~20N
  - 2.3 DURABILITY: 10,000CYCLES
3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD. AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

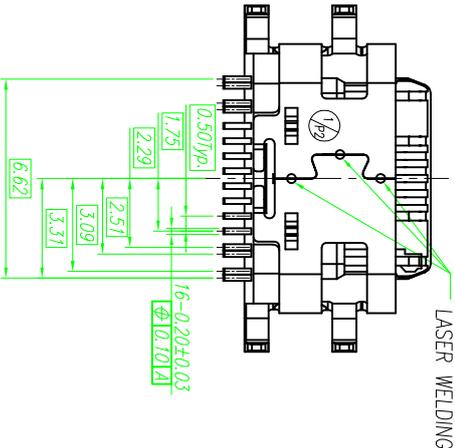






NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED
4	MID PLATE	1 PCS	STAINLESS STEEL	None
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated

产品图

Product Chart DWG  
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表		单位		比例		日期	
TOLERANCE UNLESS OTHERWISE	UNIT	SCALE	DATE	DATE	DATE	DATE	DATE
X	±0.30	X	±5'	X	1:1	2009/10/20	
XX	±0.25	X'	±2'	XX	1:1		
XXX	±0.15	XXX'	±0.5'	XXX	1:1		

# RoHS 客户图

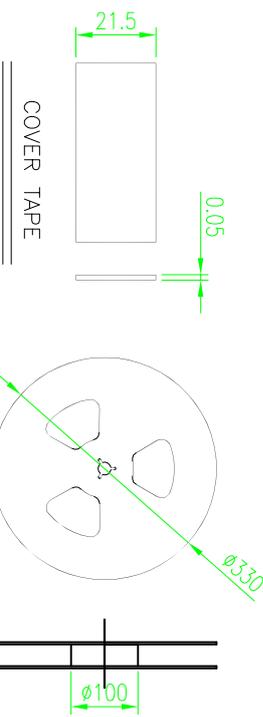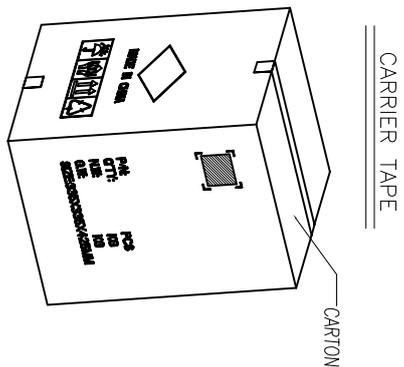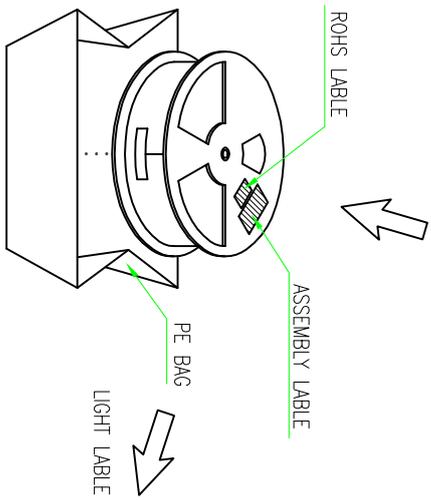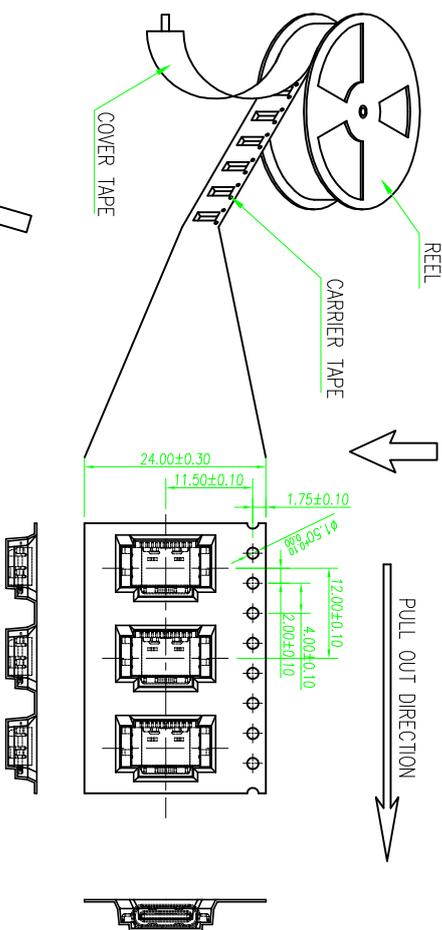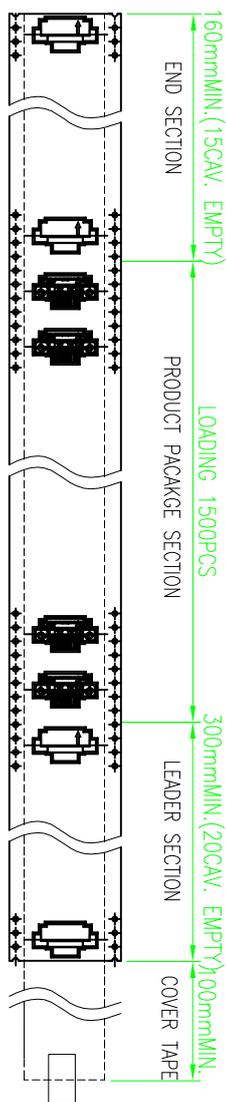

- NOTES:
- MATERIAL:
    - 1.1 REEL AND AXLE: PS,BLUE
    - 1.2 CARRIER TAPE: PET, LUCID
    - 1.3 COVER TAPE: PS,TRANSPARENT
    - 1.4 SHIPPING CARTON: CORRUGATED FIBER
  - DIMENSION:
    - 2.1 REEL: W=24.5, ØA=330
    - 2.2 CARRIER TAPE: T=0.30 W=24.0
    - 2.3 COVER TAPE: T=0.05 W=21.5
    - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
  - QUANTITY:
    - 3.1 PRIMARY PACKING: 1500PCS/REEL
    - 3.2 SECONDARY PACKING: 12 REELS/CARTON(18000PCS)/CARTON)
  - PEELING RESISTANCE: 0.1~1.3N
    - 4.1 PEELING SPEED: 300mm/minutes
    - 4.2 PEELING ANGLE: 165°~180°

公差一览表		单位		比例		日期	
TOLERANCE UNLESS OTHERWISE	UNIT	SCALE	DATE	DATE	DATE	DATE	DATE
X	±0.30	X'	±5'	XX	1:1	2009/10/20	2009/10/20
XX	±0.25	X''	±2'	XXX	核准	核准	核准
XXX	±0.30	XX'	±1'		审核	审核	审核
	±0.15	XXX'	±0.5'		雷永健	雷永健	雷永健

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

产品料号: 8001F-1600106-D2  
产品名称: TYPE C 18P 母座沉板 1.6 舌片外翻 1.15 L=5.0

目録 MAPX A0	变更内容 MODIFICATION NEW	日期 DATE 09-10-20
------------	-----------------------	------------------