RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

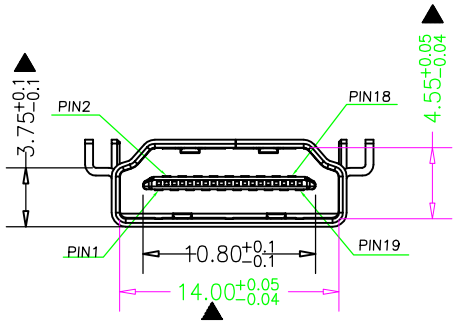

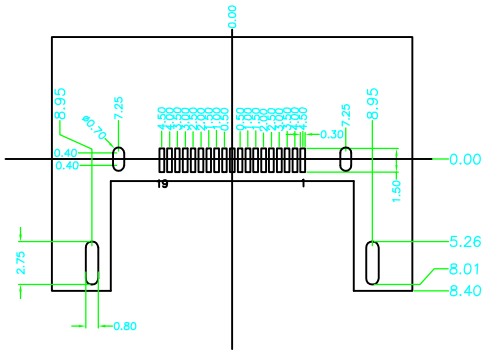

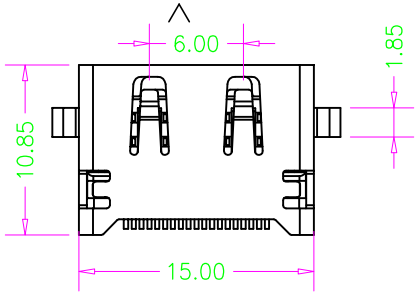









SPECIFICATION

1. Electrical characteristics
   Contact Current Rating:0.5 A
   Dielectric Withstanding Voltange:300V AC
   Insulation Resistance:a. Mate 100MΩ MIN at 500V/DC
   b. Unmate 10MΩ MIN at 150V/DC
   Contact Resistance:30mΩ MAX
   Temperature Range:-20° C to +85° C
2. Mechanical
   Mating Face:44.1N MAX
   Unmatin Face:9.8N MIN;39.2N MAX
   Durability:5000 Cycles
3. material:
   HOUSING:THERMOPLASTICS HIGH TEMP LCP+GLASS FIBER WHITE COLOR,UL94V-0
   CONTACT:Copper Alloy ,T=0.20MM
   SHELL:Copper Alloy(SPCC) ,T=0.50MM
4. PLATING:
   CONTACT:1～30u″GOLD/TIN PLATING ON CONTACT AREA
   100u″MIN,TIN PLATING ON SOLDERTAILS
   50u″MIN,NICKEL UNDERPLATING OVER ALL
   SHELL:80u″, NICKEL UNDERPLATING OVER ALL
5. ″*″Key control size

NO.	PART NAME	MATERIAL	DESCRIPTION
3	SHELL	SUS201/SPCC	NI:80u" MIN (可焊镍)
2	Molding 件	CONTACT C2680	NI:30u"MIN AU:G/F
1		Housing LCP	LCP 黑色 UL94-V0

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X°	±5°
.X	±0.25	.X°	±2°
.XX	±0.20	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

产品图 PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	26015-HDMIAF8-X
比例 SCALE	1:1	审核 CHKD	雷永健 Leiyongjian	产品名称 PRODUCT NO.	HDMI A TYPE母座沉板3.75 L=10.85
日期 DATE	2009/10/20	核准 APPD	雷永健 Leiyongjian	联系方式 Mailbox/web	mailbox: salel@xflconn.com www.xflconn.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作