
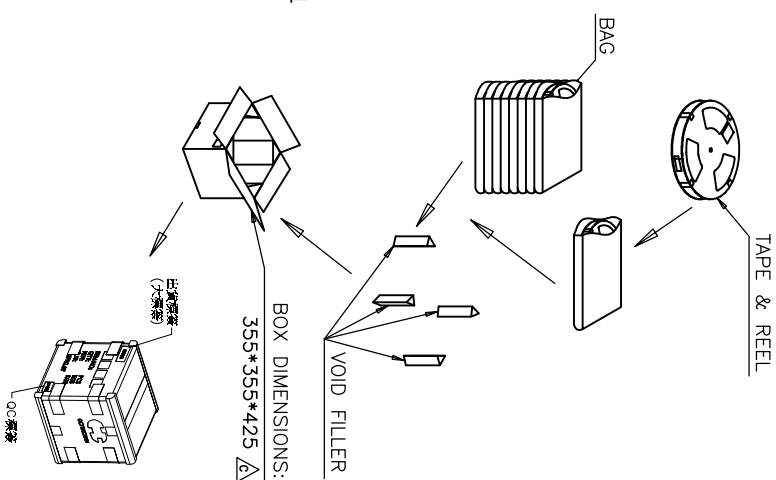
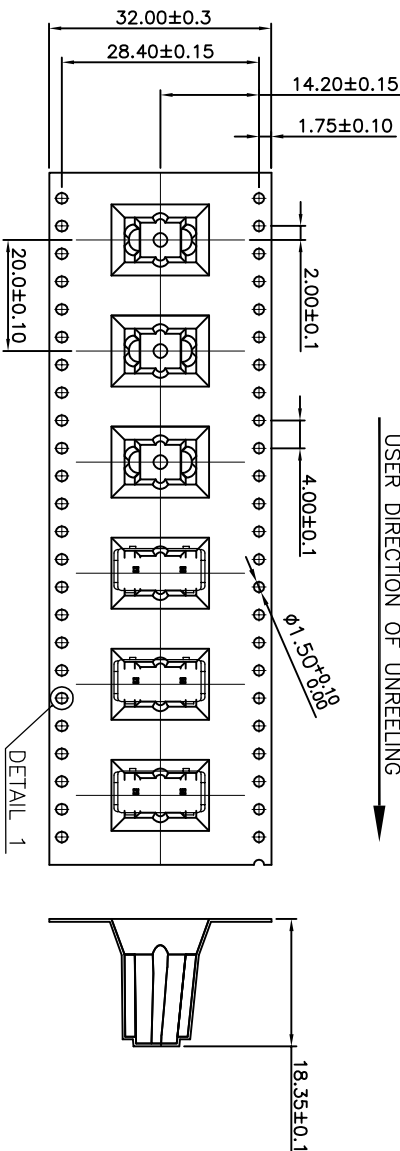



1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

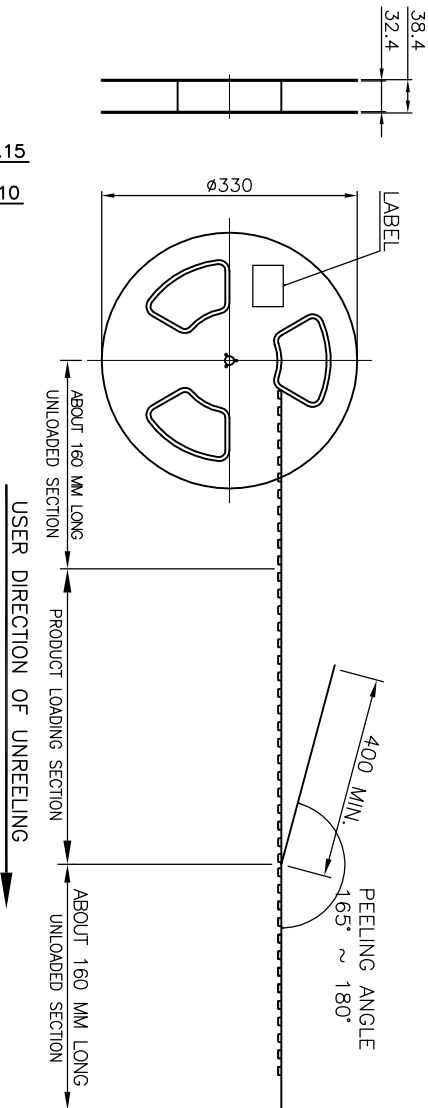

- NOTE:
1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 3. PEELING SPEED: 300 mm/min.
 4. EACH BAG SHALL BE INCLUDED DESICCANT.



DETAIL 1
4:1

产品图

PRODUCT CHART DWG

公差一览表

公差一览表				深圳市鑫风雷电子有限公司			
TOLERANCE UNLESS OTHERWISE				Shenzhen xinfenglei Electronic Co., Ltd			
X	±0.30	X'	±5°	单位 UNITS	MM	制图 DRAWING	王冠 Wangguan
.XX	±0.25	X'	±2°	比例 SCALE	1:1	审核 CHKD	雷永健 Lei Yongjian
.XXX	±0.15	.XXX'	±0.5°	日期 DATE	2009/10/20	批准 Appd	雷永健 Lei Yongjian
				产品料号 PRODUCT PART NO.	12020-UCAR002-X	产品名称 PRODUCT NO.	TYPE C 24P FEMALE VERTICAL H15.05mm SMT TYPE
				联系方式 Contact/ web	mailbox: sale@xfl.com.com	www.xfl.com.com	

PCS/ REEL	10	1500 PCS	KG	KG
CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT	