
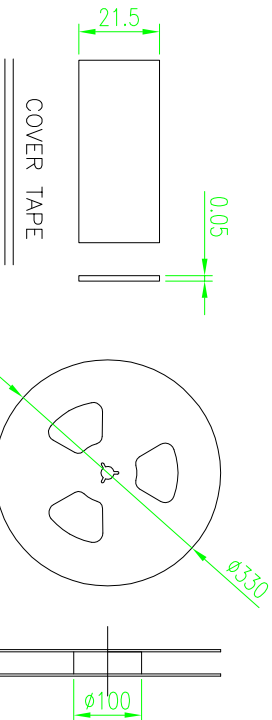
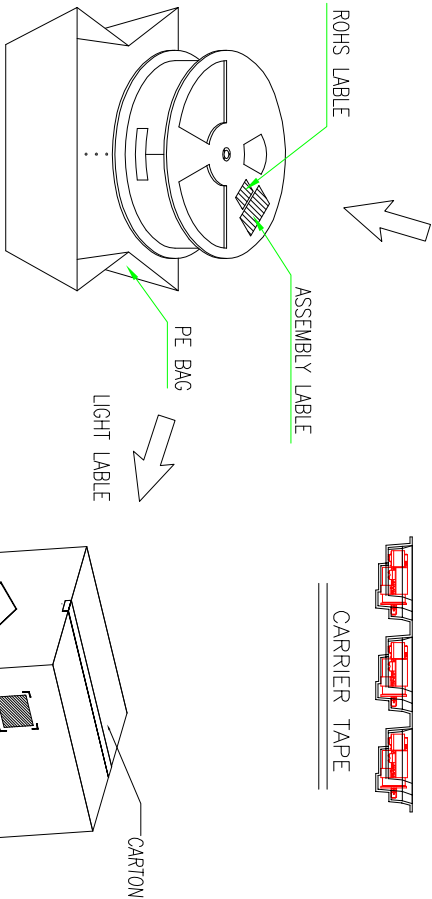


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

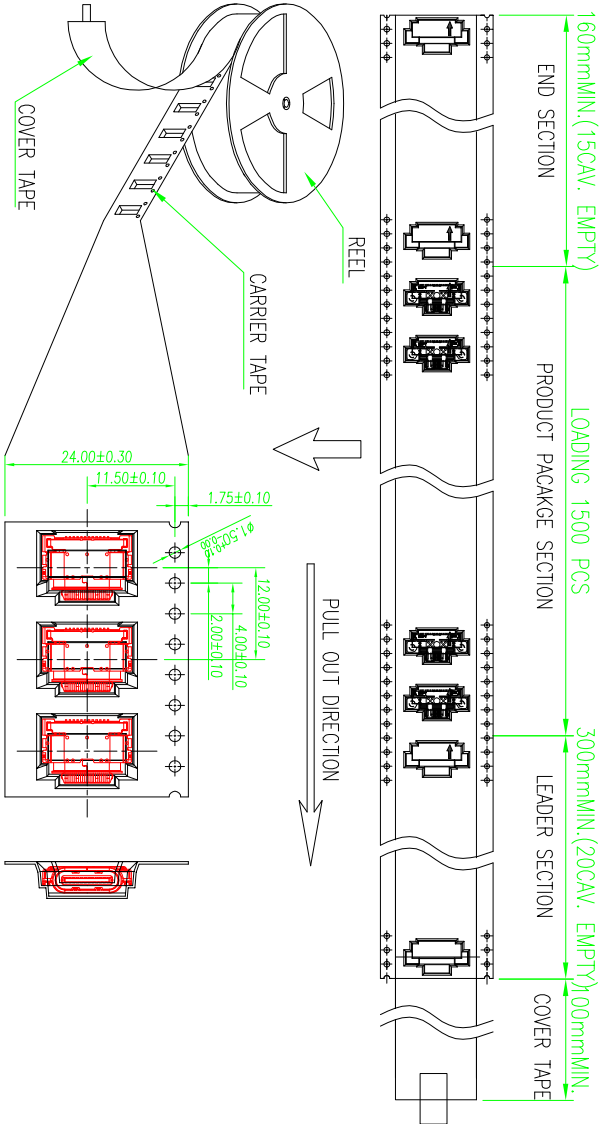

- NOTES 2:
1. MATERIAL:
- 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION:
- 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
3. QUANTITY :
- 3.1 PRIMAY PACKING: 1500 PCS/REEL
 - 3.2 SECONDARY PACKING: 10 REELS/CARTON(15000 PCS/CARTON)
4. PEELING RESISTANCE: 0.1~1.3N
- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165°~180°

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHECK	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	王冠 Wangguan	雷永健 Leiyongjian	8001F-FS24014-X
.X	±0.25	.X'	±2°	日期 DATE	雷永健 Leiyongjian	雷永健 Leiyongjian	Type C 24中母座规格书之图 L=8、4 舌片外翻、35 脚水
.XXX	±0.15	.XXX'	±0.5°	日期 DATE	2009/10/20	雷永健 Leiyongjian	角法 VIEW
				版本 VER	A0		