
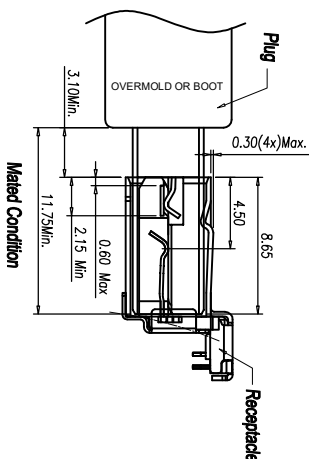

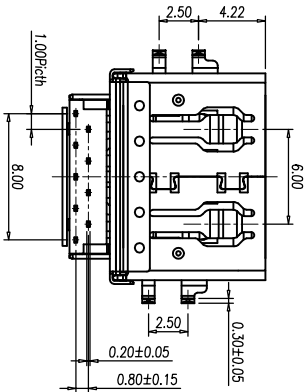

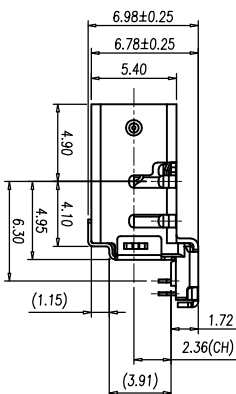



RoHS 客户图

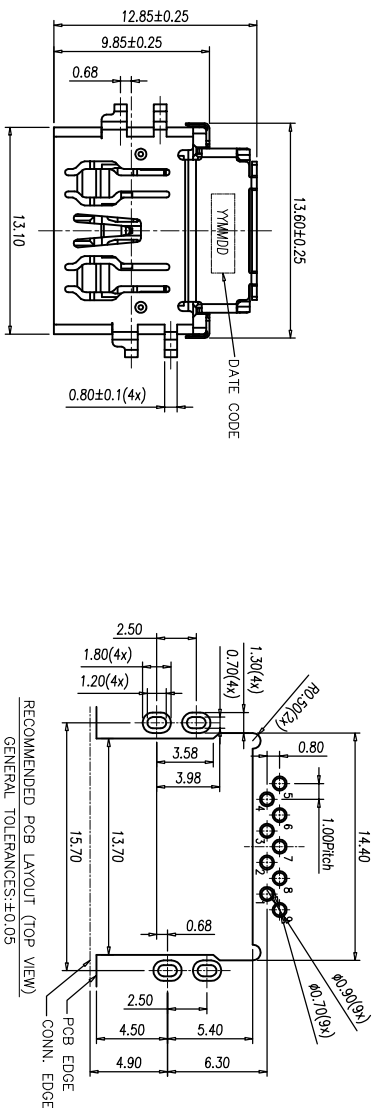

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

- NOTES:
- MATERIAL:
Housing: PA9T,UL94V-0,Black.
Contact: Copper Alloy.
Shell: SUS304.
Cover: SUS304.
 - PLATING:
Contact: Gold Plated on Contact Area.
Mating Pin 80u" Plated on Solder Tails.
Ni 50u" Min Underplated.
Shell: Ni 50u" Min Plated All Over.
Cover: NO Plated.
 - MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57kgf) max.
Unmating Force: 10N~25N(~2.55kgf).
8N~25N(0.816~2.55kgf).
 - ELECTRICAL CHARACTERISTIC
Durability: 5000 Cycles
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C

PART NO: 8003F-0000065-X

SERIE: USB3.0

Receptacle
serial number

Variable

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-			
2	manufactured Goods	Housing PA9T	1	Black &Blue UL94V-0
3	SP Semi-	Contact/COPPER ALLOY	4	T=0.25Plating Gold/Tin
4	manufactured Goods	Housing PA9T	1	Black &Blue UL94V-0
5	Shell	Contact/COPPER ALLOY	5	T=0.25 Plating Gold/Tin
		SUS304-1/2H	1	T=0.25

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHD	雷永健
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健
.XXX	±0.15	.XXX'	±0.5°	产品料号 PRODUCT PART NO	8003F-0000065-X	产品名称 PRODUCT NO	USB3.1 AF R/A DIP R/S TYPE
				角法 VIEW	CH=2.36 L=12.85 沉板反向	版本 VER	AO