

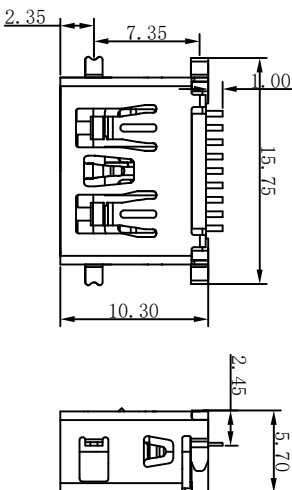


12345678910

RoHS 客户图

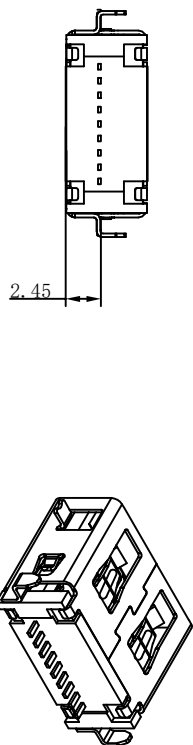

PIN NU_BER	SIGNAL NAME
1	USB 电压 VBUS
2	D-(负极)
3	D+(正极)
4	地线
5	SSRX-
6	SSRX+
7	GND(地线)
8	SSTX-
9	SSTX+
shell	SHIELD

规格说明:Specifications:
电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

机械性能:Mechanical:
1.插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

原材料:Material:
1.壳体:Housing:
Hing Temperature Ternmaplastics,

- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish: Piated Gold in Mating Area;
Tin On Solder Tails
端子四周镀60U”(MIN)-100U镀”镀金1U”
端子四周镀60U”(MIN)

2.外壳:Shell:
外壳四周镀60U”(MIN)镍
Nickel Plating

PART NO: 8003F-0000071-X
SPRIS: USB3.0
Receptacle
serial number
Variable

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO
X	±0.30	X'	±5°	MM	王冠	雷永健	8003F-0000071-X
X	±0.25	X'	±2°	比例 SCALE	1:1		
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	
.XXX	±0.15	.XXX'	±0.5°			雷永健	
						角法 VIEW	版本 VER
							A0