



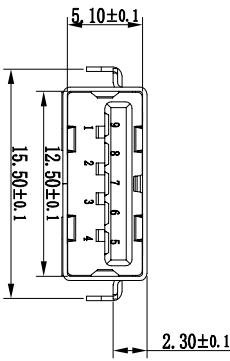



RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

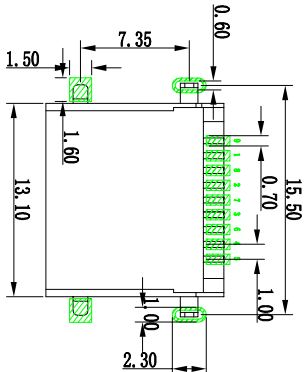

NOTE:
1. MATERIAL:
1.1 INSULATOR: LCP UL 94V-0
1.2 CONTACT: BRONZE (T=0.20mm)
1.3 SHELL: SUS201SSPCC&c2680 (T=0.30mm)

2. ELECTRICAL CHARACTERISTICS:
2.1 CONTACT RESISTANCE: 30mΩ MAXIMUM
2.2 CONTACT CURRENT RATING: 1.5A
2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
2.4 INSULATION RESISTANCE 1000 MEGOHMS MIN
2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:
3.1 MATING FORCE: 3.57kg MAX
3.2 UNMATED FORCE: 1.02kg MIN
3.3 DURABILITY: MANDATORY: 1500 CYCLES

4. PLATING
4.1 TERMINAL:
50u" MIN NICKEL ALL OVER
100u" MIN TIN ON SOLDER AREA
(1`30)u" Au ON CONTACT AREA
4.2 SHELL: 100u" MIN. NICKEL ALL OVER

Pin #	1	2	3	4	5	6	7	8	9	Shield
SIGNAL NAME	VBUS	D-	D+	GND	SIG4_SSRK-	SIG4_SSRK+	GND	SIG4_SSTR-	SIG4_SSTR+	Shield

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠 WANG GUAN	产品料号 PRODUCT PART NO	26015-U3AF018-A	
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHECK	雷永健 LEI YONGJIAN	产品名称 PRODUCT NO	USB 3.0 A型 90度弯板2.3无波端子SMT L=12.05
.X	±0.30	.X'	±2°	日期 DATE	2009/10/20	核准 APPR	雷永健 LEI YONGJIAN	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°						A0