

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

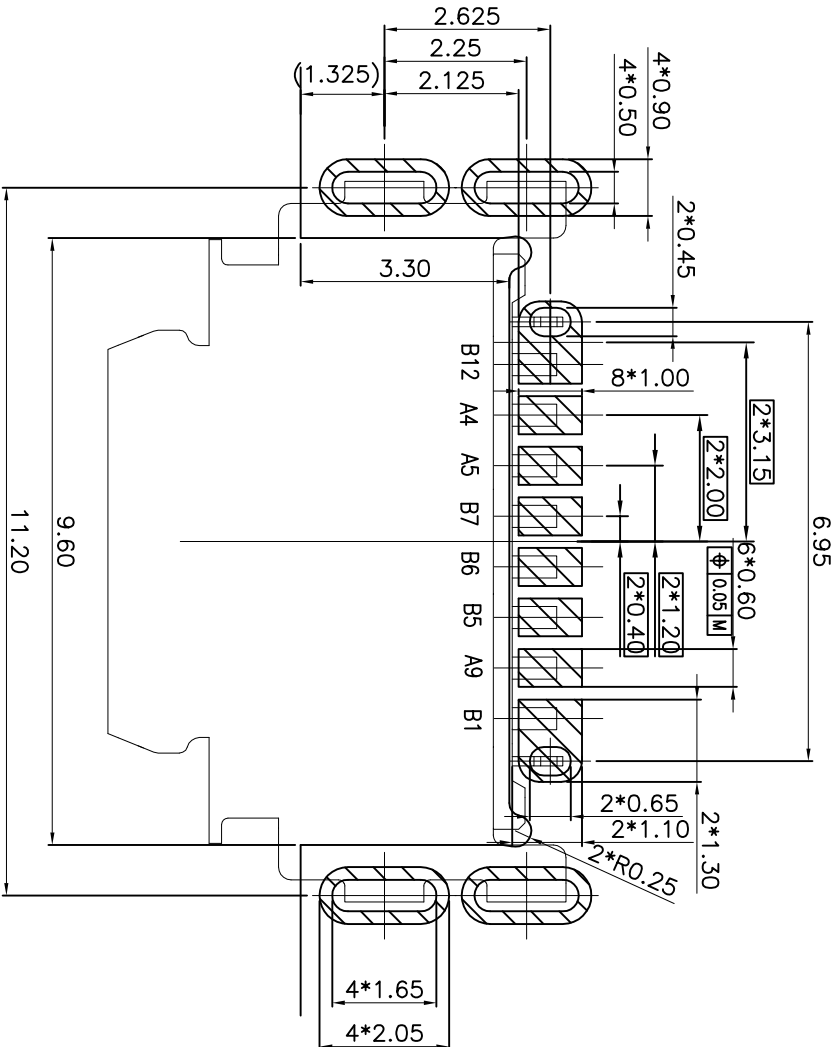
347

1 2 3 4 5 6 7 8 9 10

Rohs 客户图

PIN ASSIGNMENTS:


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
×	×	×	VBUS	CC1	×	×	×	VBUS	×	×	×
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	×	×	×	×	D-	D+	CC2	×	×	×	GND



RECOMMENDED P.C.B LAYOUT (THICKNESS:0.80MM)
DEFAULT TOLERANCE: ±0.05mm
THE THICKNESS OF STEEL MESH IS 0.10mm

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
- 1.1 CURRENT RATING: 3A/ TOTAL POWER PIN
1.25A/Pin MAX(A4,A9&B1,B12),0.25A(OTHER PIN)
 - 1.2 CONTACT RESISTANCE: 40 MILLIONHM MAX.
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.4 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
- 2.1 INSERTION FORCE: Initial:5~20N;Durability:5~20N(10000cycles);
 - 2.2 EXTRACTION FORCE: Initial:8~20N;Durability:6~20N(10000cycles);
 - 2.3 DURABILITY:10000 CYCLES
- 3.ENVIRONMENTAL CHARACTERISTICS
- 3.1 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 3.2. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.
 - 3.3. WATERPROOF:IPX5



PART NO.: 8001F-FS08007-X

SERISE: TYPE C

Receptacle

serial number

Variable

⑦	GLUE WATER	1	PCS	SILICONE	BLACK
⑥	MID PLATE	1	PCS	SUS301-H T=0.15mm	Ni 50u"min. UNDER PLATED OVER ALL.
⑤	CONTACT	1	SET	C2680-EH T=0.15mm	Ni 50u"-150u" UNDER PLATED OVER ALL. CONTACT AREA:3u"sq BRUSH PLATING SOLDER AREA:1u"min
④	HOUSING	1	PCS	PAIOT HPN-FR630M01 -20AH	COLOR: BLACK UL94V-0
③	SHELL-2	1	PCS	SUS301-3/4H T=0	50u"min. UNDER PLATED OVER ALL.
②	SHELL-1	1	PCS	SUS301-3/4H T=0	50u"min. UNDER PLATED OVER ALL.
①	SHELL-main	1	PCS	SUS316L T=0.20mm	Ni 50u"min
NO	DESCRIPTION	QTY.	MATERIAL	FINISH	

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNITS	OTHERWISE	UNIT	DRAWING	PRODUCT PART NO.	PRODUCT NAME	TYPE C 8001F-FS08007-X
X	±0.30	X'	±5'	王冠	雷永健	产品名称
X	±0.25	X'	±2'	审核	雷永健	产品料号
.XX	±0.20	.XX'	±1'	日期	2009/10/20	比例 1:1
.XXX	±0.15	.XXX'	±0.5'	批准	雷永健	日期
				Appd	Leiyongjian	联系方式
					WeiChaoZuo	联系方式








深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

目録
MAPX
A0

设计内容
MODIFICATION
NEW

日期
DATE
09-10-20

目 録 MAPX	設定内容 MODIFICATION	日 期 DATE
A0	NEW	09-10-20

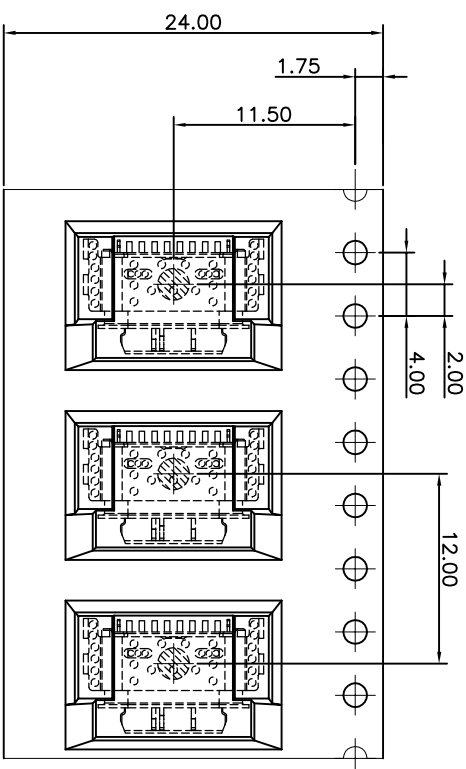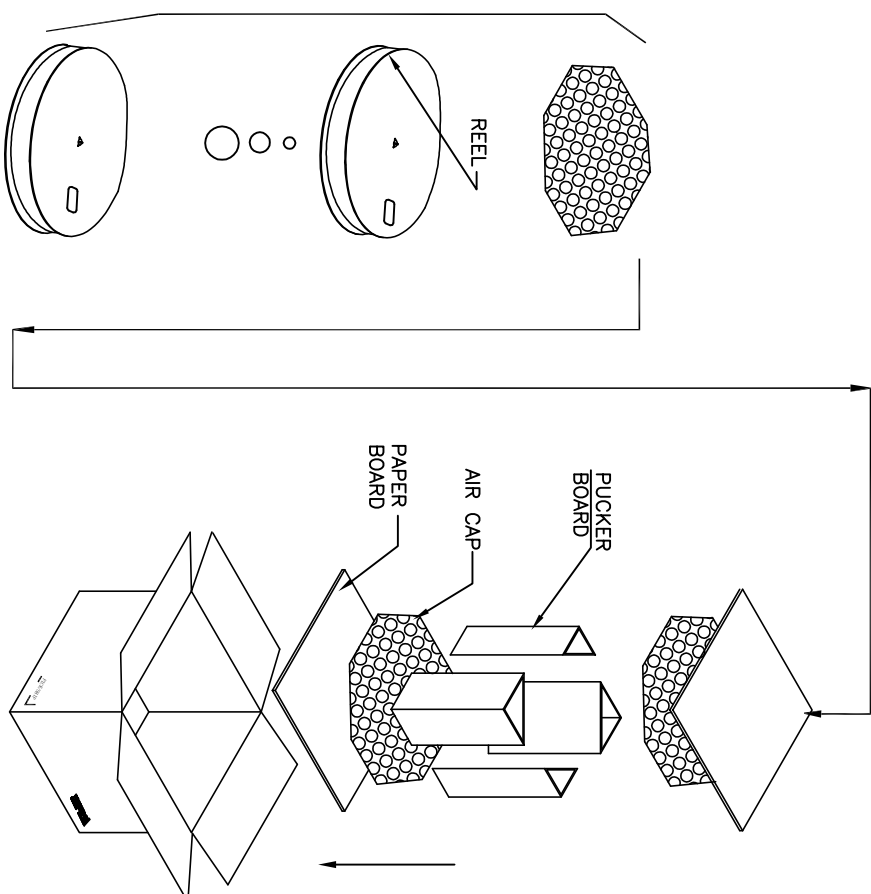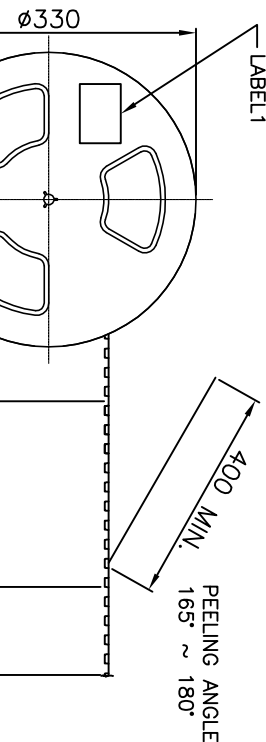TOTAL
10LAYERS

产品图		深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG		Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.
X.	±0.30	X.	±5°	雷永健 Leiyongjian	产品名称 PRODUCT NO.
.X.	±0.25	.X'	±2°	雷永健 Leiyongjian	联系方式 CONTACT
.XX	±0.20	.XX'	±1°	雷永健 Leiyongjian	TYPE C 80母插针水 沉孔1.6+/-0.5 舌片外圆1.6+/-0.05
.XXX	±0.15	.XXX'	±0.5°	雷永健 Leiyongjian	8001F-FS08007-X
日期 DATE		2009/10/20			
核准 APPR		Mailto:cs_xf@xf.com			