

RoHS







客户图

目錄

MAPX
A0

变更记录
MODIFICATION
NEW

日期
DATE
09-10-20

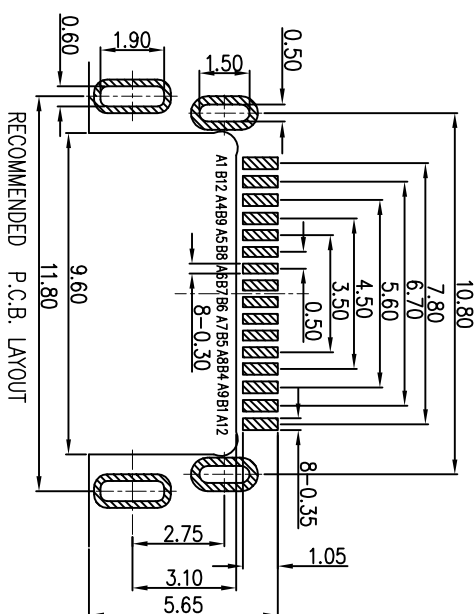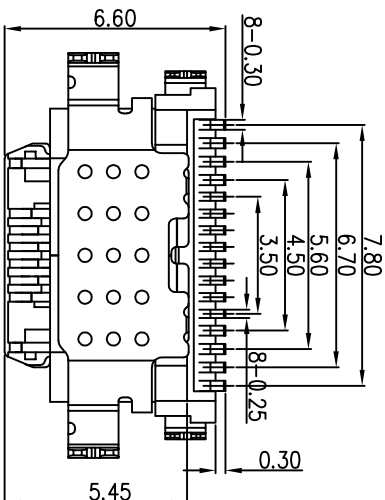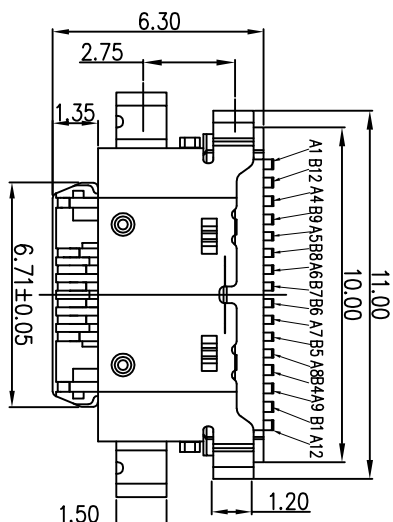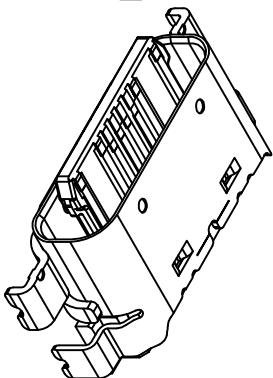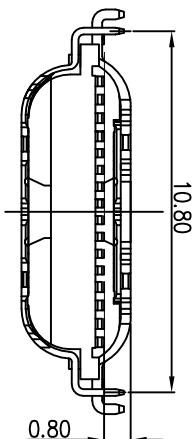


SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 3A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

2. MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial: 8~20N, AFTER TEST 6~20N
 - 2.3 DURABILITY: 10,000 CYCLES
- THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

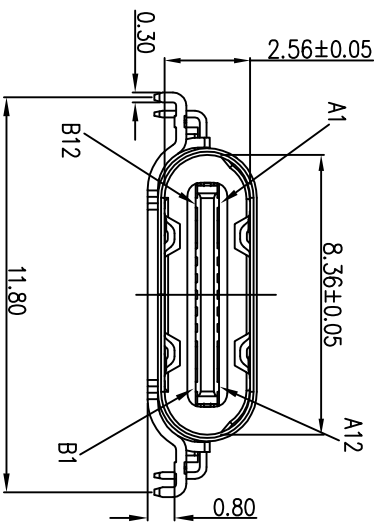

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	MID PLATE	1 PCS	STAINLESS STEEL	None
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

产品图

PRODUCT CHART DWG





深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表		单位		制图		产品料号	
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO	
X	±0.30	X'	±5°	王冠	8001F-1600106-A2		
X	±0.25	X'	±2°	审核	雷永健		
.XX	±0.30	.XX'	±1°	日期	2009/10/20		
.XXX	±0.15	.XXX'	±0.5°	核准	雷永健		
				角法	VIEW		
				版本	VER		

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

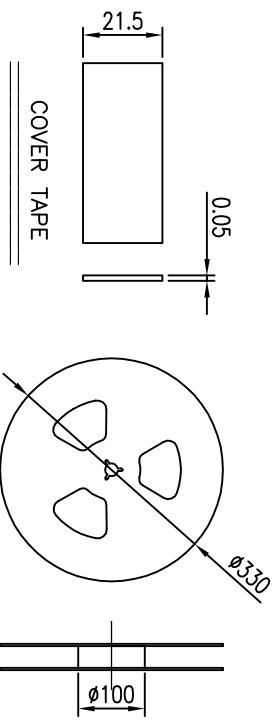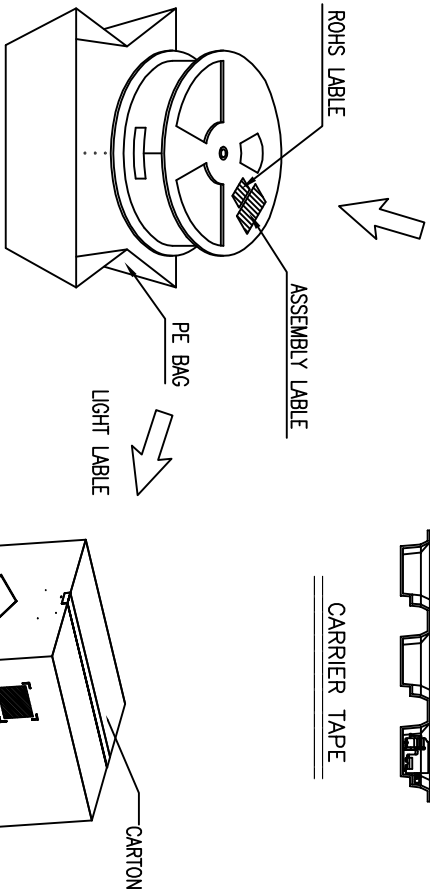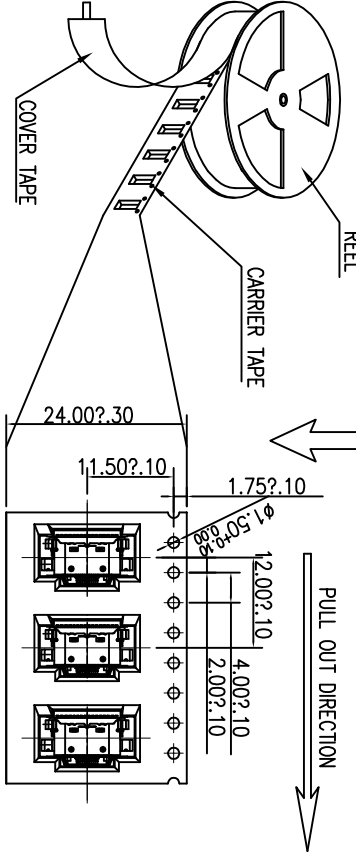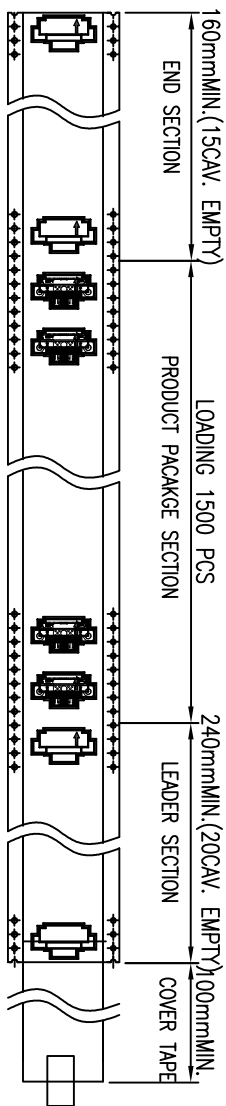

- NOTES 2:
1. MATERIAL:
- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION:
- 2.1 REEL: W=24.5, φA=330
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
3. QUANTITY :
- 3.1 PRIMARY PACKING: 1500 PCS/REEL
- 3.2 SECONDARY PACKING: 10 REELS/CARTON(1500 PCS/CARTON)
4. PEELING RESISTANCE: 0.1~1.3N
- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHD	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	雷永健	产品名称 TYPE C 16P母座沉板0.8 双壳 舌片外翻1.35
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	雷永健	角法 VIEW
.XXX	±0.15	.XXX'	±0.5°	核准 APPR		雷永健	版本 VER
							A0