

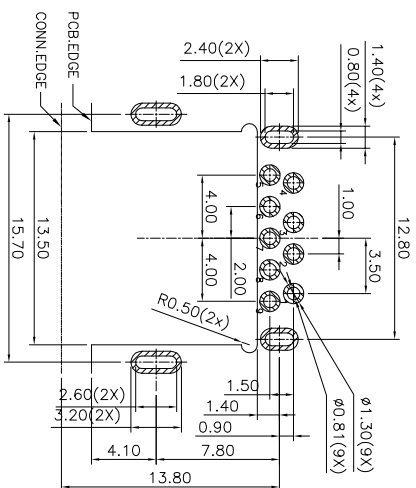
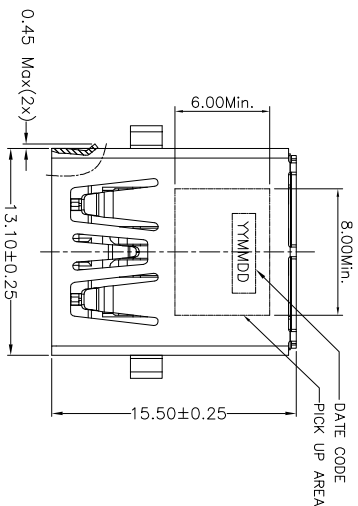



密戸窓

	日期 DATE
	09-10-20

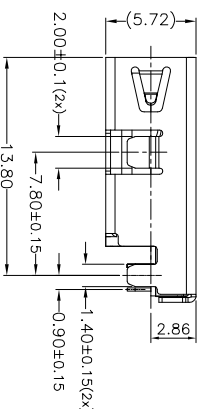

1. MATERIAL AND PLATING:
Housing: PA9T+30%G-F, Ulu 94V~0, Block Contact(4/5pin): Copper Alloy Au And Sn Plated, Shell: Stainless Steel Ni Plated.
2. MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
3. ELECTRICAL CHARACTERISTIC
Current Rating: 1.84A(Pin1-4), 0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Insulation Resistance: 30M Ohm Max.
Dielectric Withstanding Voltage: 100V AC.
4. TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
5. DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
6. ORDER INFORMATION:

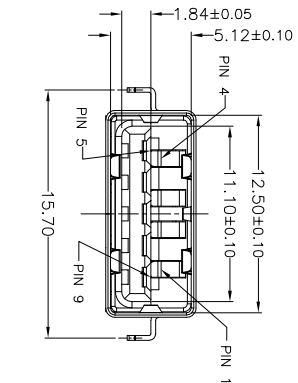




Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

PART NO.: 8003F-0000072-X

SERISE: USB3.0

Receptacle

serial number

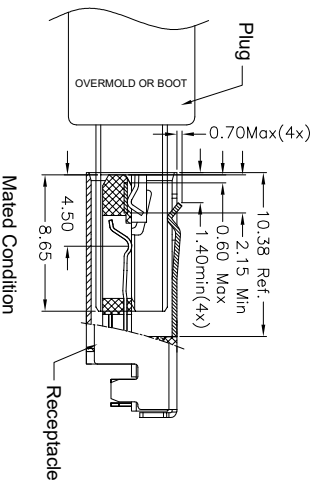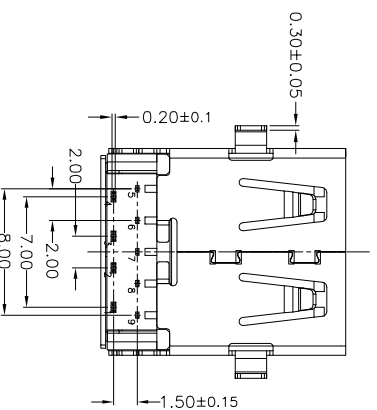[illegible]

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi- Housing	PA6T	1	Block 88Ue U194V-0
2	manufactured Goods Contact	COPPER ALLOY	4	T=0.25Pldng Cld/Tm
3	SP Semi- Housing	PA6T	1	Block 88Ue U194V-0
4	manufactured Goods Contact	COPPER ALLOY	5	T=0.25 Pldng Cld/Tm
5	Shell	SUS304-1/2H	1	T=0.25

图品生

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差—一览表		单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE		UNITS	DRAWING		8003F-0000072-X
X.	±0.30	X.	±5°	审核	产品名称
X.	±0.25	X.	±2°	雷永健	PRODUCT NAME
.XX	±0.30	.XX	±1°		PRODUCT NO.
.XXX	±0.15	.XXX	±0.5°		
日期	2009/10/20	比例	1:1	雷永健	角法
					USB3.1 A/F R/A DIP RVS TYPE
					H=2.86 L=15.5 沉板反向脚长1.1
					版本
					VER
					AO