


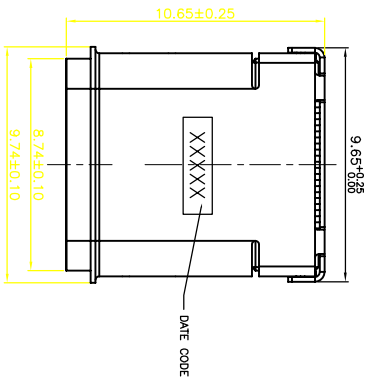

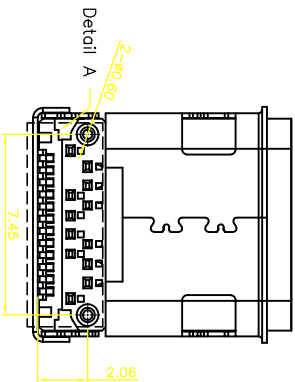



1 2 3 4 5 6 7 8 9 10

Rohs 客户图

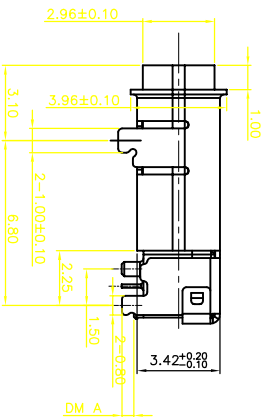

- NOTE:
1. MATERIAL:
 - 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;
 - 1.2 CONTACT: COPPER ALLOY(T=0.15mm)
 - 1.3 SHELL:STAINLESS STEEL(T=0.20mm)
 2. ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mv, 100mA.
 - 2.2 CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN(PINA1,A4,A9,A12,B1,B4,B9,B12); 1.25A FOR V_opin. PIN; 0.25A FOR OTHER SIGNAL PIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 2.4 INSULATION RESISTANCE 100MΩ Min
 - 2.5 OPERATING TEMPERATURE: -40℃ ~ 85℃
 - 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: 6~20N AFTER TEST
 - 3.3 DURABILITY: 10,000 CYCLES
 4. PLATING
 - 4.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u" Min NICKEL AND 80u" Min Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
 - 4.2 OUT SHELL: 50u" Min. NICKEL ALL OVER
 - 4.3 INNER SHELL: DEGREASE
 5. PART NUMBER:



NO	DM A	料号
1	0.6	8001F-FS24016-A
2	1.3	8001F-FS24016-B
3	1.6	8001F-FS24016-C

PART NO: 8001F-FS24017-X

SERISE: TYPE C


Receptacle

serial number


Variable

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表				单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	Wangguang	PRODUCT PART NO
X	±0.30	X'	±5'	比例	审核	雷永健	产品名称
.X	±0.25	.X'	±2'	SCALE	CHD	Lei Yongjian	PRODUCT NO.
.XX	±0.20	.XX'	±1'	日期	核准	雷永健	联系方式
.XXX	±0.15	.XXX'	±0.5'	DATE	Appd	Lei Yongjian	Mailbox: sale1@xfll.com, www. xfll.com. com


7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
AO	NEW	09-10-20	

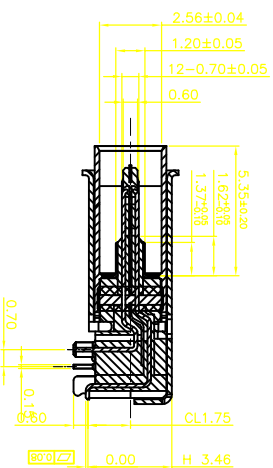

SECTION A-A

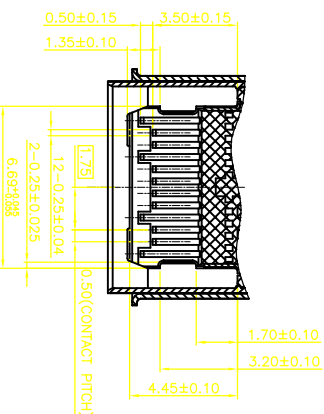

SECTION B-B

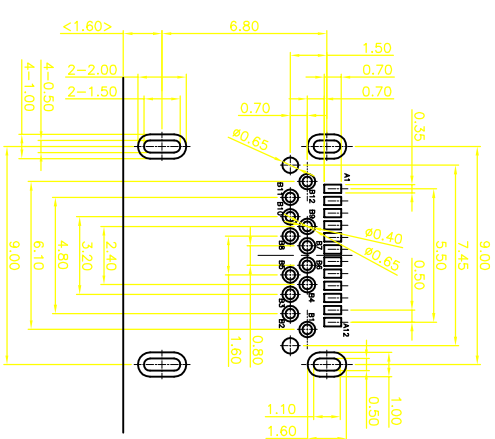

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT ARE 

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vas	First	B9	Vas	First
A5	CC1	Second	B8	SB02	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SB01	Second	B5	CC2	Second
A9	Vas	First	B4	Vas	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

产品图 PRODUCT CHART DMC		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.
X.	±0.30 X. ±5°	MM	审核 CHECK	王永健 Wangyongjian	8001F-FS24017-X
.X	±0.25 X. ±2°	比例 SCALE		产品名称 PRODUCT NO.	Type C 24板上型前插后斜防水 L=10.6t
.XX	±0.20 .XX ±1°	日期 DATE	核准 APPRO	联系方式 Contact/usub	
.XXX	±0.15 .XXX ±0.5°	2009/10/20		mailbox: sale1@xfl.com.com www.xfl.com.com	

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345




346

347

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

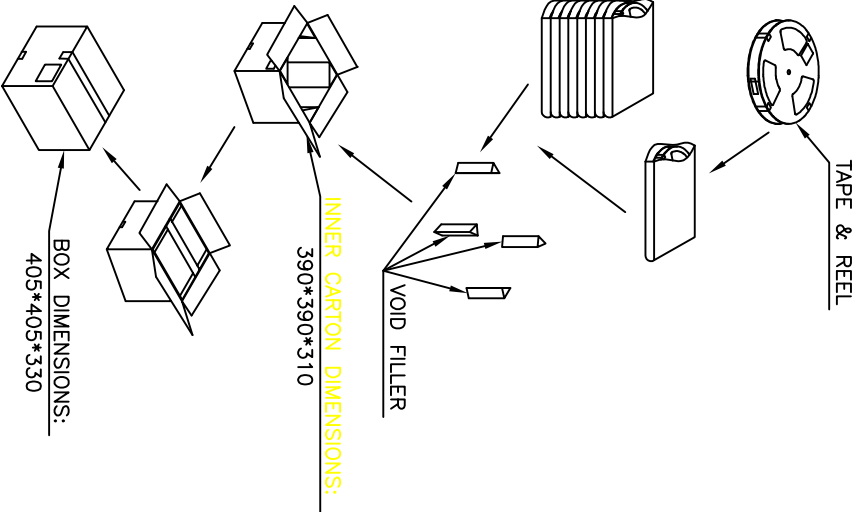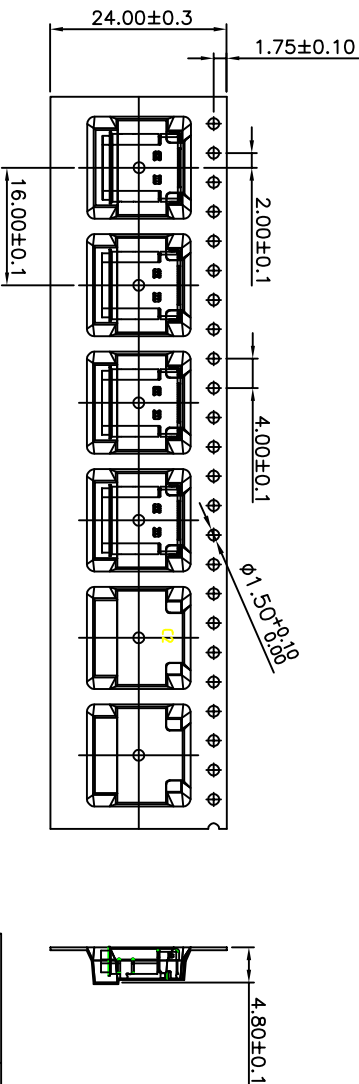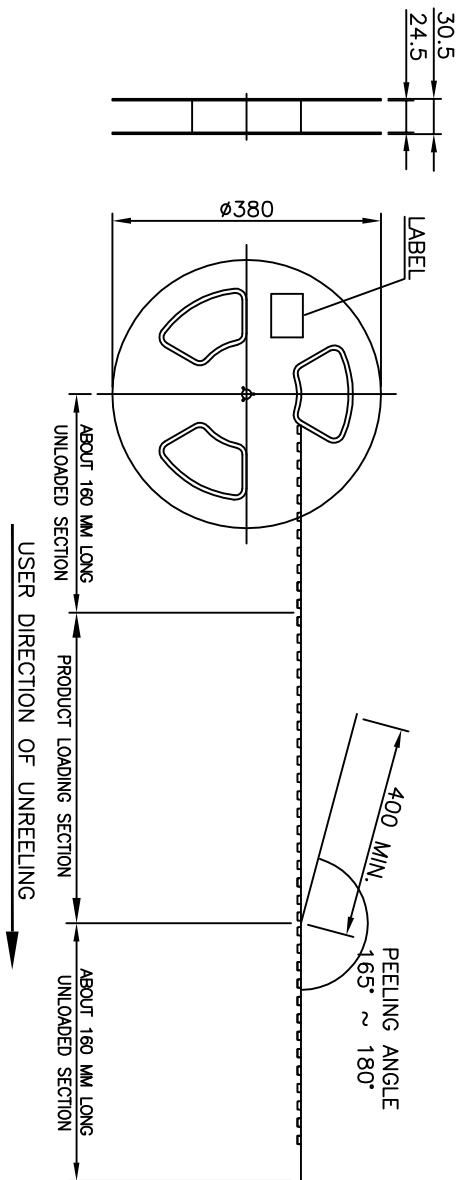

NOTE:

1.MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.

2.PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

3.PEELING SPEED: 300 mm/min.

4.EACH BAG SHALL BE INCLUDED DESICCANT.

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	MM	制图	审核	日期	2009/10/20
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	CHD	DATE	
X ±0.30	X'	±5'	王冠	雷永健	2009/10/20	
.X ±0.25	.X'	±2'	雷永健	雷永健	2009/10/20	
.XX ±0.20	.XX'	±1'	雷永健	雷永健	2009/10/20	
.XXX ±0.15	.XXX'	±0.5'	雷永健	雷永健	2009/10/20	

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

产品料号	8001F-FS24017-X
产品名称	Type C 24p板上型耐插后插防水 I=10.65
联系方式	mailto:sale1@xfl.com, www.xfl.com, com