



12345678910




Rohs 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



NOTES:

- 1.Material:SEE TABLE1;
2.Plating specification,
2-1.Contact:
Contact area: Ni30u "Min/Au
Solder area: Ni30u "Min/Sn80u "Min.
Other area: Ni 30u "Min.
2-2.Shell: Ni 50u "Min..
2-3.Latch:
Solder area: Ni30u "Min/Sn80u "Min.
Other area: Ni 30u "Min.
3.Mechanical Performance,
3-1.Insertion Force:5~20N;
3-2.Extraction Force:6~20N after 10000 cycles;
3-3.Durability:10000 cycles.
4.Electrical Performance,
4-1.Insulation Resistance:100Ω Min.
4-2.Contact Resistance :50mΩ Max.
4-3.Dielectric Strength :100V AC.
5.characteristic impedance:100 Ohm±10%;
6."Marked" is the important control dimentions.
7.The product accords with HF STD.
8.Operating temperature: -40C-85C.

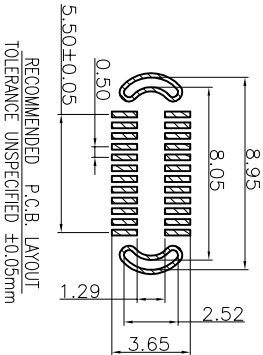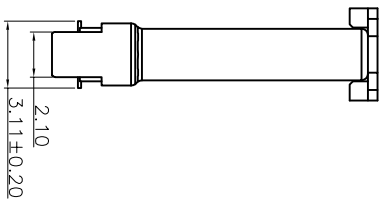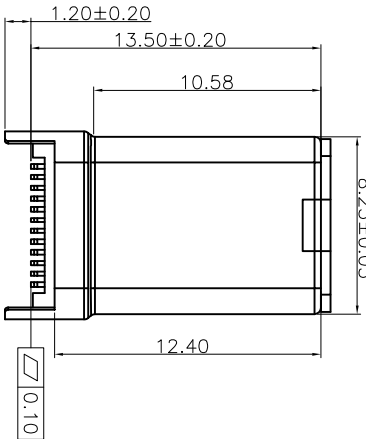

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

TABLE1:

5	EMC SPRING	Stainless Steel;SUS301,T=0.08mm;
4	CONTACT	Copper Alloy;AuNiSn;
3	LATCH	Stainless Steel;SUS301,T=0.40mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel;SUS316L,T=0.15mm;
NO.	NAME	DESCRIPTION

PART NO: 8001M-2400025-E

SERIE: TYPE C

PLUG

serial number

Variable

TABLE2:

PINS DESCRIPTION ONLY USED FOR 3.1 SERIES.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	VBUS	SBUI	D-	D+	CC	VBUS	TX1-	TX1+	GND
GND	TX2+	TX2-	VBUS	Vccom			SBUI	VBUS	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED	单位 UNITS	制图 DRAWING	审核 CHKD	日期 DATE	产品料号 PRODUCT PART NO	产品名称 PRODUCT NO	联系方式 Mailbox/web
X ±0.30 X ±0.25 XX ±0.20 XXX ±0.15	X ±5° X ±2° XX ±1° XXX ±0.5°	比例 SCALE 1:1	审核 CHKD	2009/10/20	8001M-2400025-E	Type C 24p公头拉伸立式SMT H=13.5	mailbox: sale1@xfll.com.com www_xfll.comn.com
XXX ±0.5°	±1°	比例 SCALE 1:1	审核 CHKD	2009/10/20	8001M-2400025-E	Type C 24p公头拉伸立式SMT H=13.5	mailbox: sale1@xfll.com.com www_xfll.comn.com


前空20PCS 产品400PCS 后空20PCS



① 产品入载带示意图




② 卷盘贴标签示意图




③ 10盘产品叠层示意图



三角锁(4pcs)

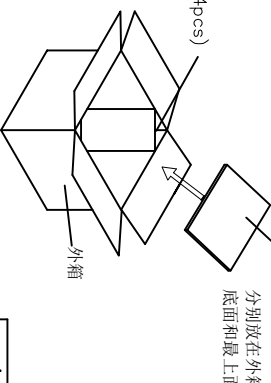

④ 产品入外箱示意图



⑤ 外箱封箱示意图

NOTE:

1. QUANTITY/REEL: 400 PCS

数量/卷: 400 PCS

QUANTITY/INNER CARTON: 400 X 10 = 4000 PCS

数量/箱: 400X 10 = 4000 PCS

2. FREE 20 CAVE IN THE FRONT CARRIER ADN FREE

20 CAVE IN THE END CARRIER.

包装带内圈空20格, 外圈空20格.

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	X	XX	XXX
±0.30	±0.25	±0.20	±0.15
±5°	±2°	±1°	±0.5°

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	8001M-2400025-E
比例 SCALE	1:1	审核 CHECK	雷永健 Leiyongjian	产品名称 PRODUCT NO.	Type C 24p公头拉伸立式SMT H=13.
日期 DATE	2009/10/20	核准 APPROVED	雷永健 Leiyongjian	联系方式 MOTOR/USB	mail:bo sale1@xfll.com www.xfll.com.com

ITEM	DESC.	MATERIAL	REMARKS	QTY
1	卷盘	PS	φ530MM*W28.5MM	10
2	天地板	K3K		2
3	外标签			1
4	三角柱	K=K		4
5	外箱	A=A	L345mm*W345mm*315mm	1
6	防水袋	PS		1
7	干燥剂			1