

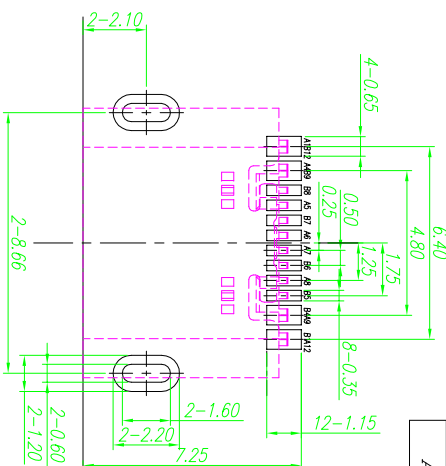

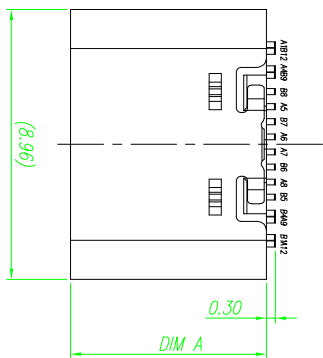



RoHS 客户图

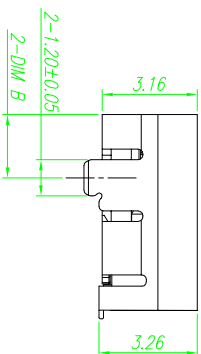


P.C.B LAYOUT VIEW TOLERANCE: ±0.05



PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	X10	X11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBUT	VBUS	RV2+	RV2-	GND		
GND	RV1+	RV1-	VBUS	SBUT	D+	D-	CC2	VBUS	RV2-	RV2+	GND		GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

TABLE A

Port Number	DIM A	DIM B
USC-016XXX-0085	6.50	2.10
USC-016XXX-0086	6.90	2.50

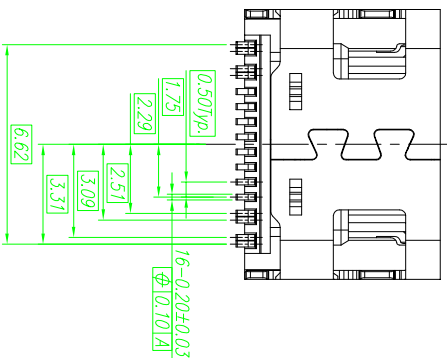

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	UNIT	SCALE
X	±0.30	X'
X	±0.25	X'
XX	±0.30	XX'
XXX	±0.15	XXX'

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED
2	IM_HOUSING	1 PCS	High top, Plastic+Cu-plating+Stainless Steel	Au & Ni Plated
1	SHELL	1 PCS	Stainless Steel	Ni Plated

单位	制图	审核	日期	比例	日期	角法	版本
UNIT	DRAWING	CHD	DATE	SCALE	DATE	VIEW	VER
mm	王冠	雷永健	2009/10/20	1:1	2009/10/20	第三角	A0

目錄
MAPX

设计内容
MODIFICATION

日期
DATE

A0

NEW

09-10-20

SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- #### 2. MECHANICAL CHARACTERISTICS
- 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N, AFTER TEST 6~20N
 - 2.3 DURABILITY: 10,000CYCLES

3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD, AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.